A.I.A. FILE NO. 23j.

RESILIENT FLOORS

of NAIRN

TRADEMARK REGISTERED

LINOLEUM

INCLUDING

PATTERN BOOK FOR ARCHITECTS

PUBLISHED BY CONGOLEUM-NAIRN INC.

MANUFACTURERS OF NAIRN LINOLEUM

- SEALEX VELTONE
- SEALEX KARNEAN AND ADHESIVE SEALEX KARNEAN
- SEALEX BATTLESHIP, PLAIN AND JASPÉ
- SEALEX LINOLEUM TILE
- TREADLITE AND PERSONAL-IZED FLOORS

A.I.A. FILE NO. 23j.

AT
4130
C76
1939

Congoleum-Nairn, Inc.

THE LIBRARIES

COLUMBIA UNIVERSITY

AVERY LIBRARY

20—
(B)
House

RESILIENT FLOORS
OF NAIRN LINOLEUM
FOR ARCHITECTS

INCLUDING

COLOR BOOK OF PATTERNS

TYPICAL INSTALLATIONS

INSTALLATION SPECIFICATIONS

NAIRN
SEALEX
LINOLEUM
Stain proof · Easily Cleaned
SATISFACTION
GUARANTEED
OR YOUR MONEY BACK

CONGOLEUM-NAIRN INC., KEARNY, N. J.

ATLANTA, GA.
BOSTON, MASS.
CHICAGO, ILL.
DALLAS, TEXAS
MINNEAPOLIS, MINN.
NEW YORK, N. Y.
PHILADELPHIA, PA.
PITTSBURGH, PA.
SAN FRANCISCO, CAL.
ST. LOUIS, MO.

National Showrooms—Chicago, New York, San Francisco

Copyright 1939, by Congoleum-Nairn Inc.

Table of Contents

COMMODITIES OF NAIRN LINOLEUM

	PAGE
Sealex Veltone—All-over Marble	3-34
Sealex Battleship	39
Sealex Plain	39-42
Sealex Jaspé	45-46
Sealex Karnean Inlaid-Heavy Gauge	58-73
Sealex Karnean Inlaid-Medium Gauge	75-78
Adhesive Sealex Karnean Inlaid-Std. Gauge	80-107
Sealex Colonial Plank	74
Treadlite Linoleum	108-120
Sealex Linoleum Tile	121-125
Nairn Desk Top Linoleum	44
Nairn Cork Carpet	44
Sealex Insets	35-38
Sealex Borders and Feature Strips	43
Nairn Wall Linoleum	47-57

GENERAL INFORMATION

	PAGE
Gauge Table of Linoleum Thicknesses	2
How to Install Nairn Sealex Insets	200
Instructions for Laying Nairn Adhesive Sealex Linoleum	79
Instructions for Laying Nairn Treadlite Linoleum	79
Specifications for Sealex Linoleum Tile over Concrete Underfloors	125
Why and Where you Should Specify Nairn Linoleum	127

CAMERA HIGHLIGHTS IN THE WORLD OF NAIRN LINOLEUM

Typical Nairn Linoleum Installations

	PAGE
Schools	134-137
Libraries	138
Athletic Rooms	139
Churches	140-141
Hospitals	142-147
Professional Offices	148-149
Commercial Areas	150-156
Public Buildings	157
Stores and Shops	158-165
Hotels and Clubs	166-169
Homes	170-172

SPECIFICATIONS FOR INSTALLING NAIRN LINOLEUM

UNDERFLOORS	PAGE
Suspended Concrete	174-177
Suspended Wood	178-181
Pre-Cast Gypsum Plank	182-183
Rough Wood	184-185
Wood on or Below Grade	186-187
Concrete on Grade	188-189

WALLS	PAGE
Plaster	175-177
Gypsum Wall Board	179-181
Wainscot Height	182-183
Window Openings	184-185
Exposed	186-187
Doors and Door Recesses	188-189
Door Threshold	188-189

MISCELLANEOUS	PAGE
Floors and Walls with Terrazzo Base and Border	190-191
Stair Treads and Risers	192-193
Walls and Ceilings in Bathroom Areas	194-195
Walls and Ceiling in Standing Shower Stalls	196-197
Sink Top and Splashback	198-199
One-Piece Cove Base and Border at Toe Recess	198-199

GAUGE TABLE

6 mm. Gauge—.236″


3/16″ Gauge—.188″


⅛″ Heavy Gauge—.125″


Medium Gauge—.095″


Standard Gauge—.075″

The gauges established by Government and manufacturing standards allow +.005 to nominal dimension given. The thicknesses available in every commodity are indicated on the introductory page of each commodity.

Nairn Linoleum – *Sealex Veltone*

NAIRN SEALEX VELTONE—an Exclusive Congoleum-Nairn Beauty Creation! Nairn Sealex Veltones are reaching new highs in sales success with their unique combination of sheer beauty and downright, all-round practicability.

Just take a look at the wide variety of gorgeous colors—light, delicate pastels—sparkling bright hues—deep, rich, darker tones. No wonder Nairn Sealex Veltones are received with increasing enthusiasm by architects, decorators and designers—people who know and appreciate their fine qualities of beauty and pattern design.

COLOR-CORRELATED. The entire line of Nairn Sealex Veltones is completely color-correlated to correctly blend with Nairn Sealex Insets, Feature Strips and Borders in designing beautiful, new "Personal-ized Floors." Nairn Sealex Veltones have that individual touch that's so distinctive.

MOST PRACTICAL LINOLEUM. Because of its non-mechanical design and its broad color range, Nairn Sealex Veltone is the most versatile and practical decorative linoleum on the market today. The delightful, continuous flow of color eliminates any matching problem.

Nairn Sealex Veltones are the beautiful and practical answer to the newest color trends in floor-coverings. Because they are so easy to keep clean and maintain, and do not readily show traffic grime, they are ideally suited to all types of commercial and residential installations.

Nairn Sealex Veltones provide unlimited design opportunities for institutional and commercial installations of all kinds.

ACTUAL THICKNESS OF NAIRN SEALEX VELTONES: 3/16″ or 4.76 mm. Heavy Gauge, .125″ or 3.18 mm. Medium Gauge, .095″ or 2.40 mm. Standard Gauge, .079″ or 2.00 mm.

ON COMMERCIAL WORK the 1/8″ Heavy Gauge or heavier should always be specified. Lighter Gauges are for residential work only.

30
6
39
BY LIBRARY

Nairn Linoleum – *Sealex Veltone*

"Van Dyke Brown"

No. 2901—Heavy Gauge

Code: Vandy

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Sparta"

No. 2902—Heavy Gauge	Code: Sparty	
No. A7202—Standard Gauge, Adhesive	Code: Adspartard	
No. 7202—Standard Gauge, Without Adhesive	Code: Spartard	

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

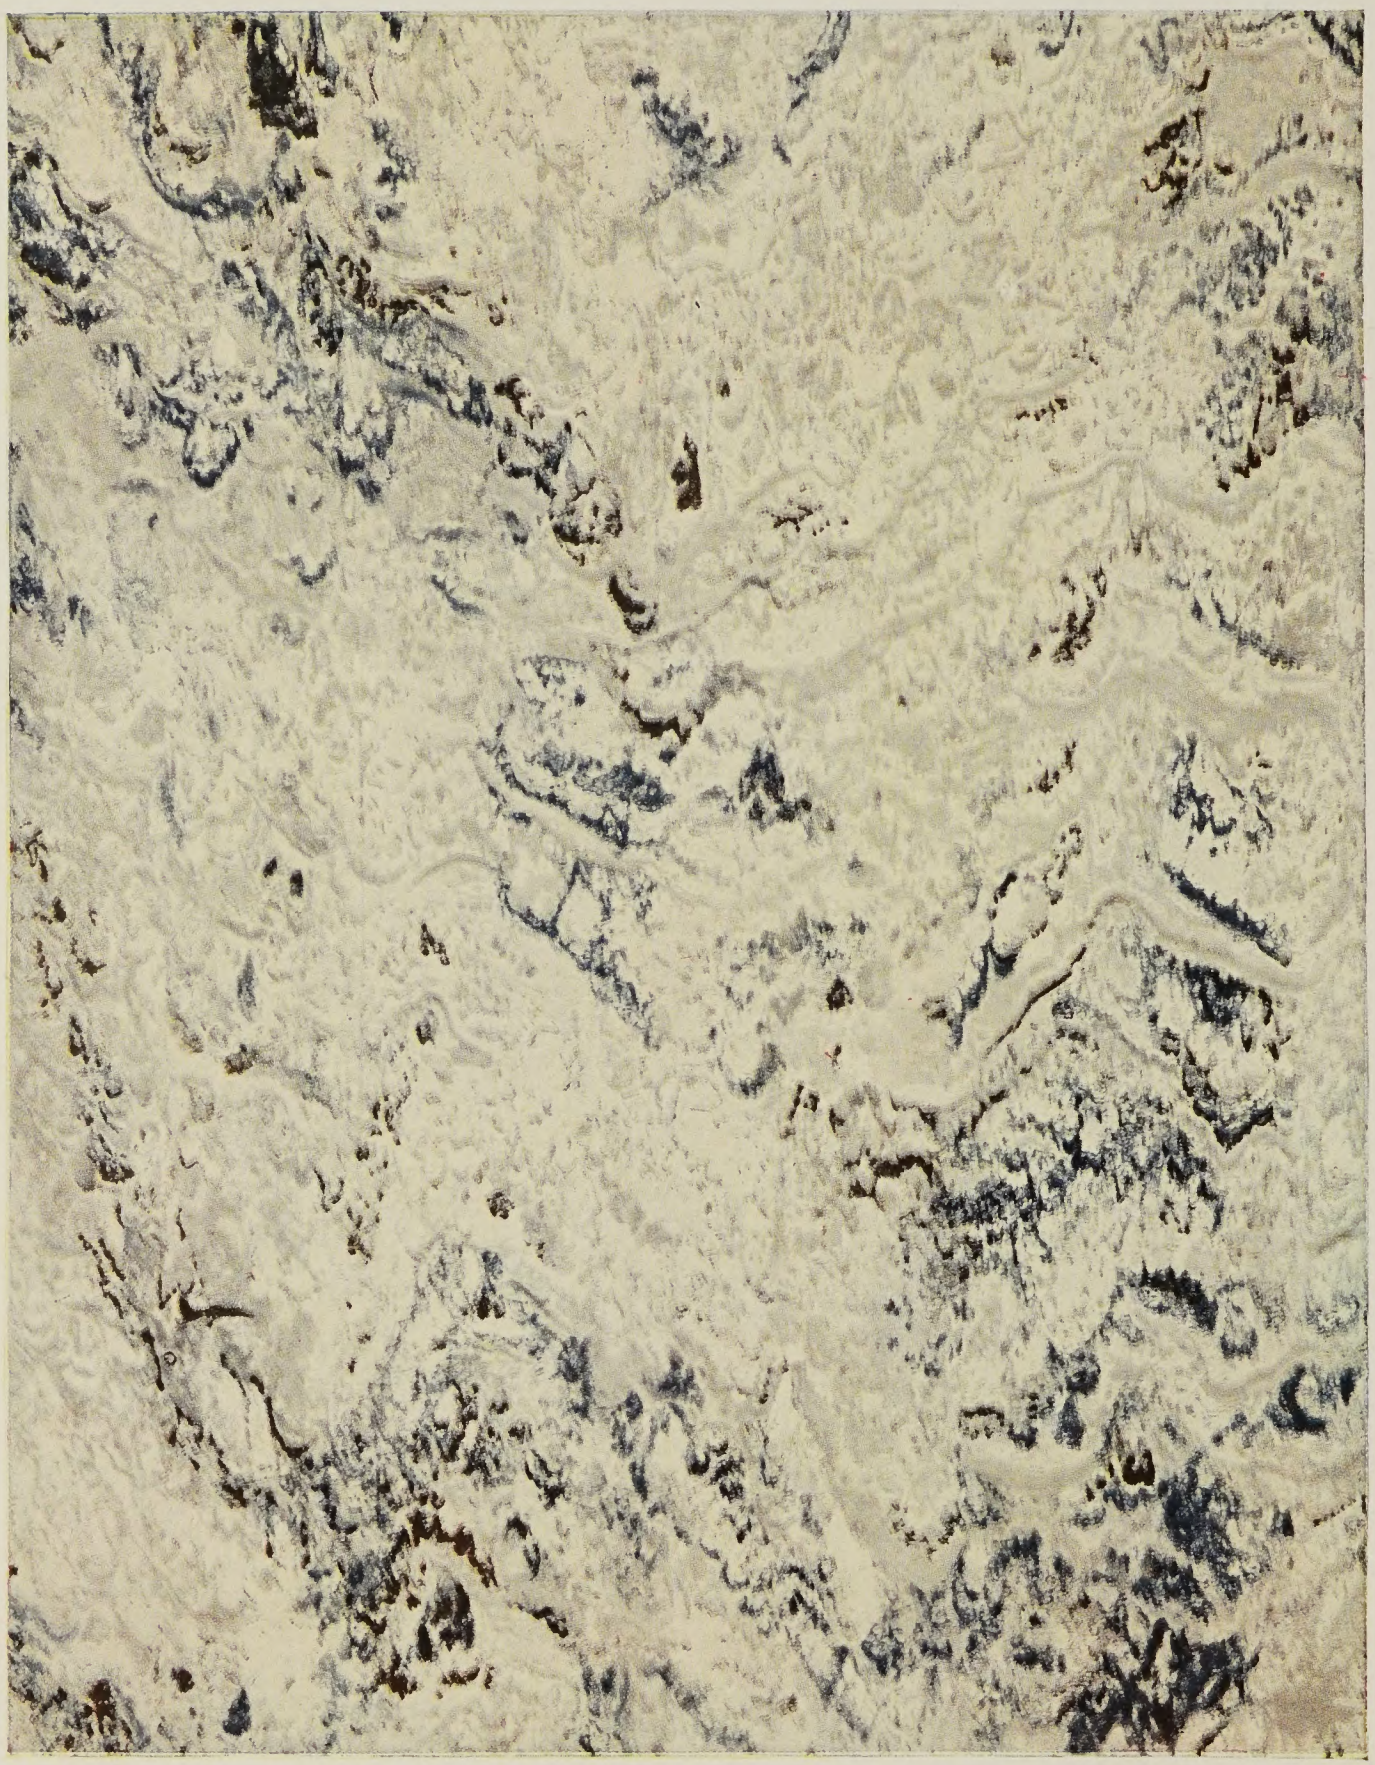

"*Troy*"

No. A7204—Standard Gauge, Adhesive — Code: Adtroyard
No. 7204—Standard Gauge, Without Adhesive — Code: Troyard

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Athens"

No. A7205—Standard Gauge, Adhesive Code: Adathenard
No. 7205—Standard Gauge, Without Adhesive Code: Athenard

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Claret Red"

No. A7208—Standard Gauge, Adhesive — Code: Adclarard
No. 7208—Standard Gauge, Without Adhesive — Code: Clarard

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Tizzaro"

No. A7219—Standard Gauge, Adhesive — Code: Adtizzard
No. 7219—Standard Gauge, Without Adhesive — Code: Tizzard

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Corinth"

No. 6931—Medium Gauge	Code: Corum
No. A7231—Standard Gauge, Adhesive	Code: Adcorinth
No. 7231—Standard Gauge, Without Adhesive	Code: Corinth

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Granada"

No. 6933—Medium Gauge	Code: Granum	
No. A7233—Standard Gauge, Adhesive	Code: Adgranada	
No. 7233—Standard Gauge, Without Adhesive	Code: Granada	

Illustration $\frac{1}{4}$ scale.

Nairn Linoleum—*Sealex Veltone*

"Naples"

No. 6935—Medium Gauge — Code: Napum
No. A7235—Standard Gauge, Adhesive — Code: Adnaples
No. 7235—Standard Gauge, Without Adhesive — Code: Naples

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Trieste"

No. 2937—Heavy Gauge	Code: Triesty	
No. 6937—Medium Gauge	Code: Trium	
No. A7237—Standard Gauge, Adhesive	Code: Adtrieste	
No. 7237—Standard Gauge, Without Adhesive	Code: Trieste	

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

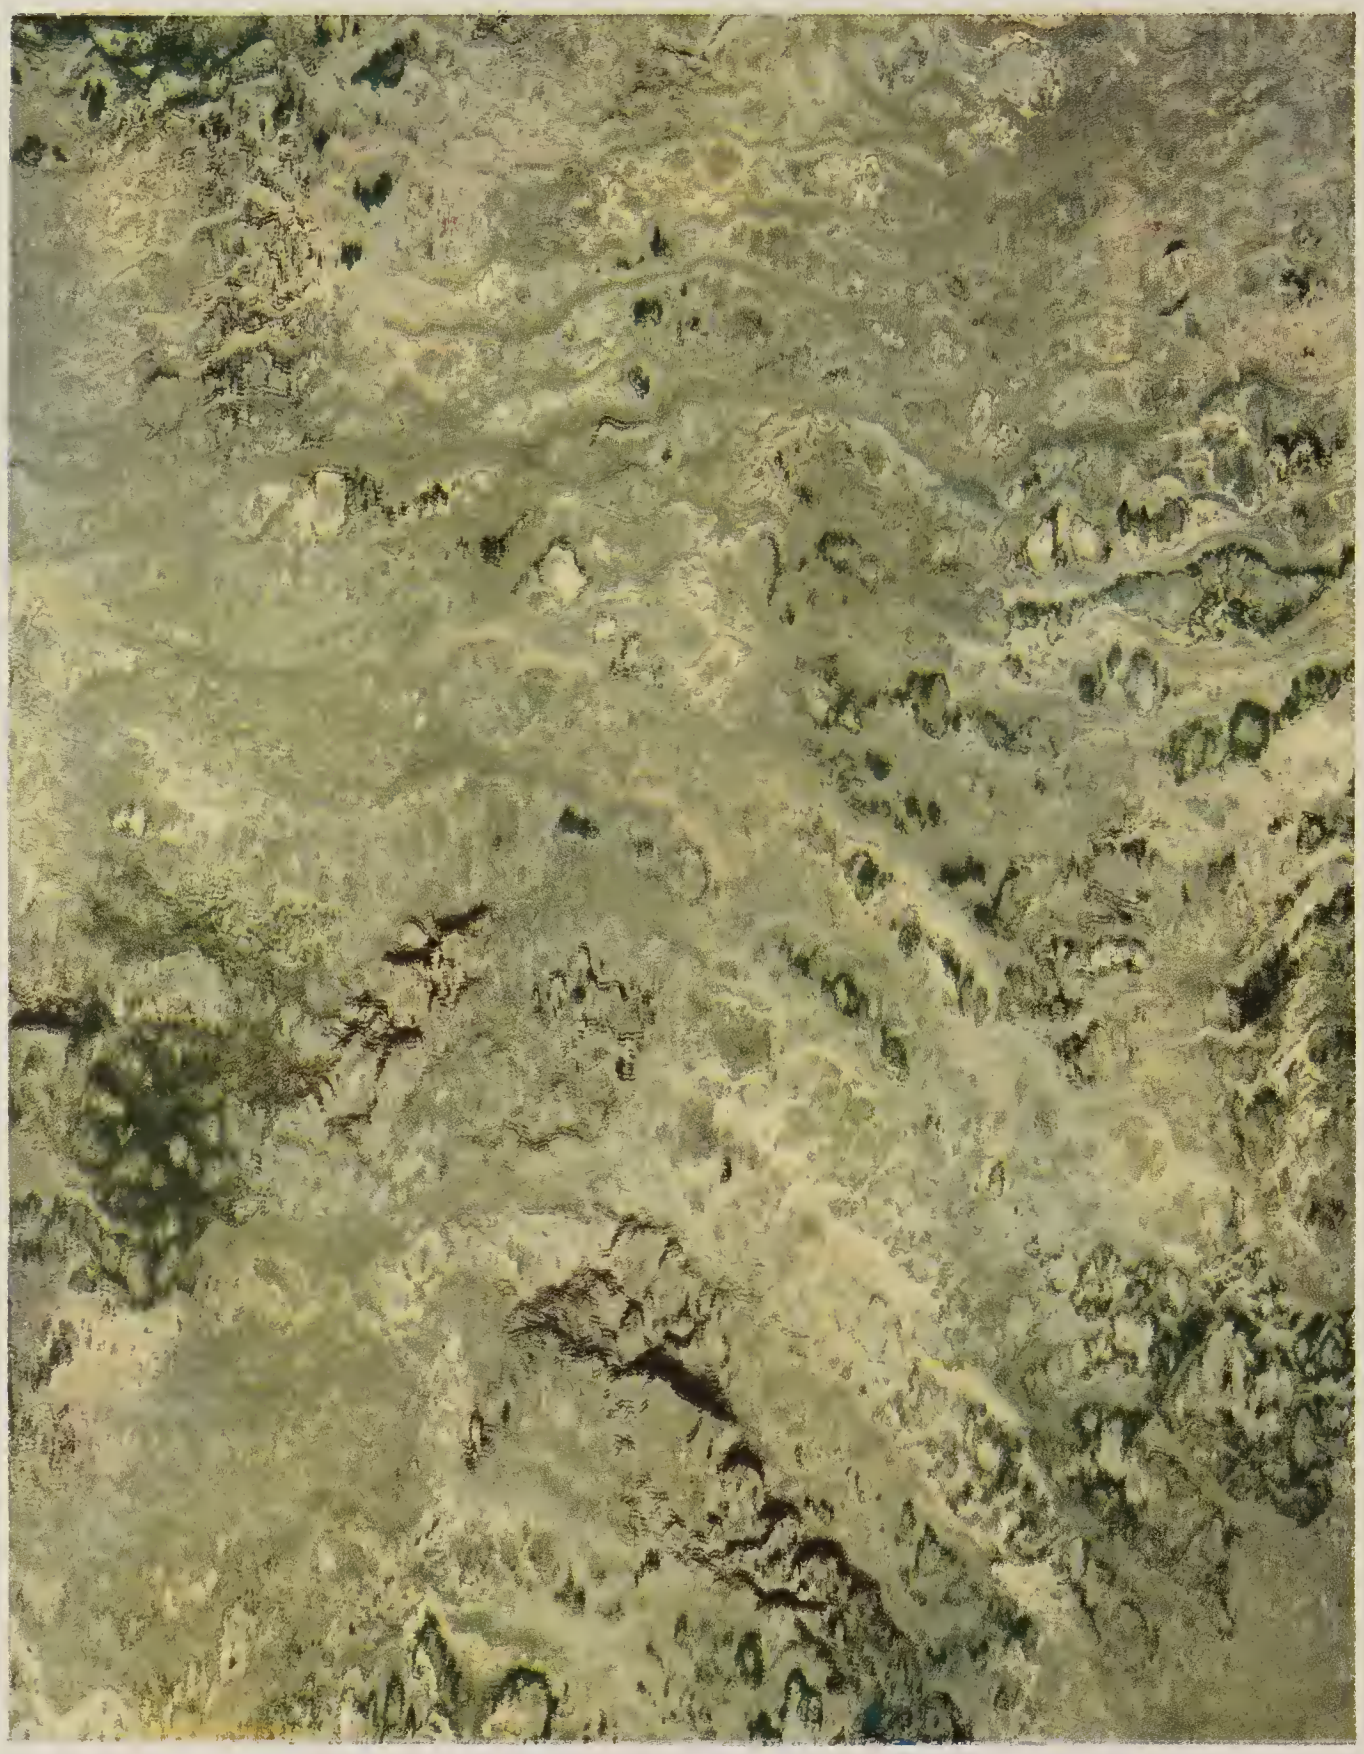

"Marsh Green"

No. 1941—3/16″ Gauge		Code: Marbat
No. 2941—Heavy Gauge		Code: Marvy
No. 6941—Medium Gauge		Code: Marum
No. A7241—Standard Gauge, Adhesive		Code: Admarsh
No. 7241—Standard Gauge, Without Adhesive		Code: Marsh

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"*Marcotta*"

No. 6943—Medium Gauge	Code: Marcotum	
No. A7243—Standard Gauge, Adhesive	Code: Admarcotta	
No. 7243—Standard Gauge, Without Adhesive	Code: Marcotta	

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Sepia Taupe"

No. 2951—Heavy Gauge

Code: Taupy

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Tagala"

No. A7253—Standard Gauge, Adhesive Code: Adtagalard
No. 7253—Standard Gauge, Without Adhesive Code: Tagalard

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Sonora"

No. 2954—Heavy Gauge	Code: Sony
No. A7254—Standard Gauge, Adhesive	Code: Adsonora
No. 7254—Standard Gauge, Without Adhesive	Code: Sonora

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"*Ventura*"

No. 2956—Heavy Gauge	Code: Venty	
No. A7256—Standard Gauge, Adhesive	Code: Adventura	
No. 7256—Standard Gauge, Without Adhesive	Code: Ventura	

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Palma"

No. 2957	—Heavy Gauge	Code: Palmy
No. A7257	—Standard Gauge, Adhesive	Code: Adpalma
No. 7257	—Standard Gauge, Without Adhesive	Code: Palma

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

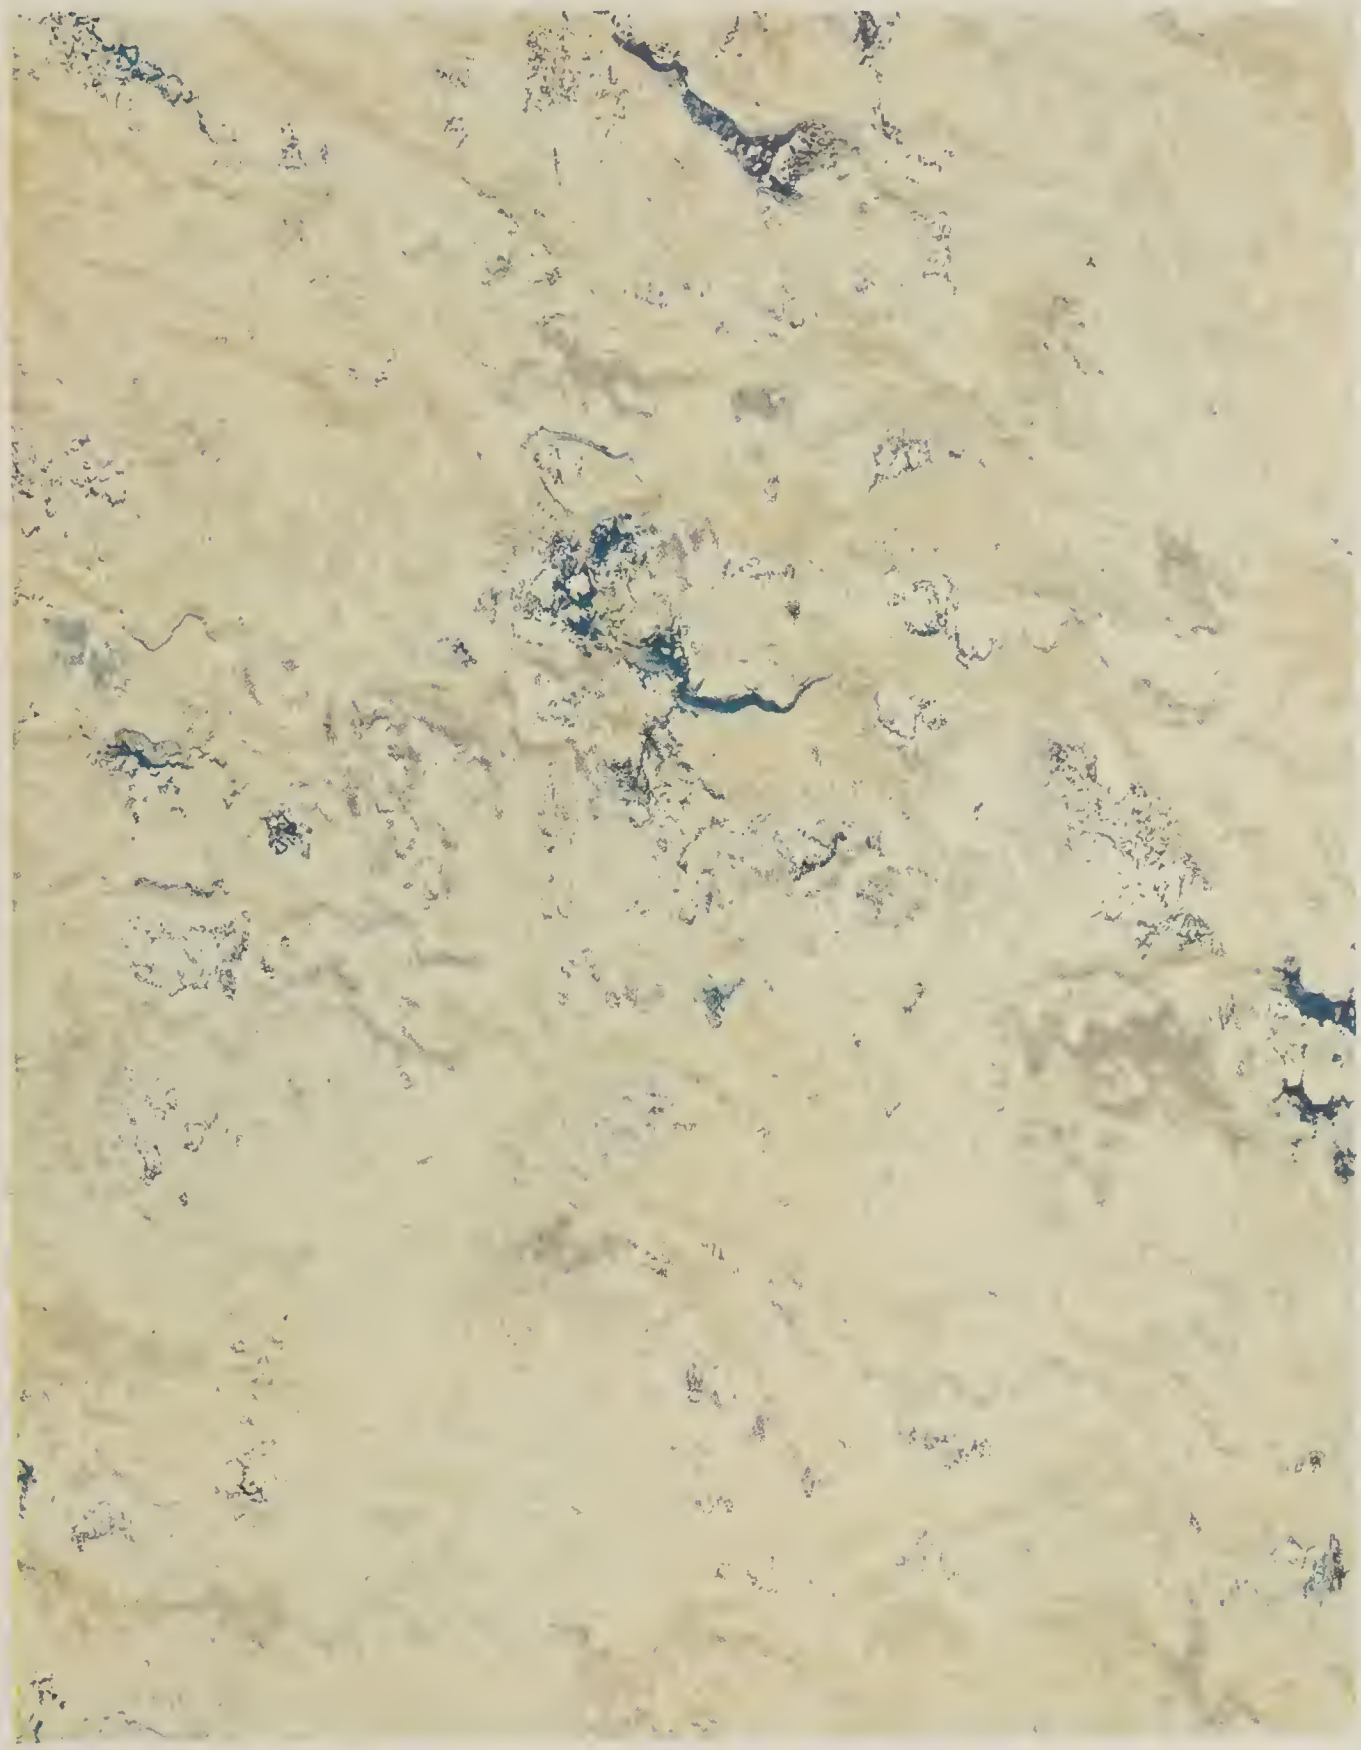

"Cartagena"

No. A7258—Standard Gauge, Adhesive Code: Adcartagena
No. 7258—Standard Gauge, Without Adhesive Code: Cartagena

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Vulcan"

No. 1959—3/16″ Gauge		Code: Vulbat
No. 2959—Heavy Gauge		Code: Calumet
No. 6959—Medium Gauge		Code: Vulcan
No. A7359—Standard Gauge, Adhesive		Code: Adfriar
No. 7359—Standard Gauge, Without Adhesive		Code: Friar

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Circassian"

No. 1968—3/16″ Gauge — Code: Cirbat
No. 2968—Heavy Gauge — Code: Circassian
No. 6968—Medium Gauge — Code: Cirbe

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Tibet"

No. 1970—3/16″ Gauge — Code: Tibbat
No. 2970—Heavy Gauge — Code: Tibet
No. 6970—Medium Gauge — Code: Tibbe

Illustration 1/4 scale.

Nairn Linoleum—*Sealex Veltone*

"Evergreen"

No. 1972—3/16″ Gauge — Code: Everbat
No. 2972—Heavy Gauge — Code: Evergreen
No. 6972—Medium Gauge — Code: Evreen

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

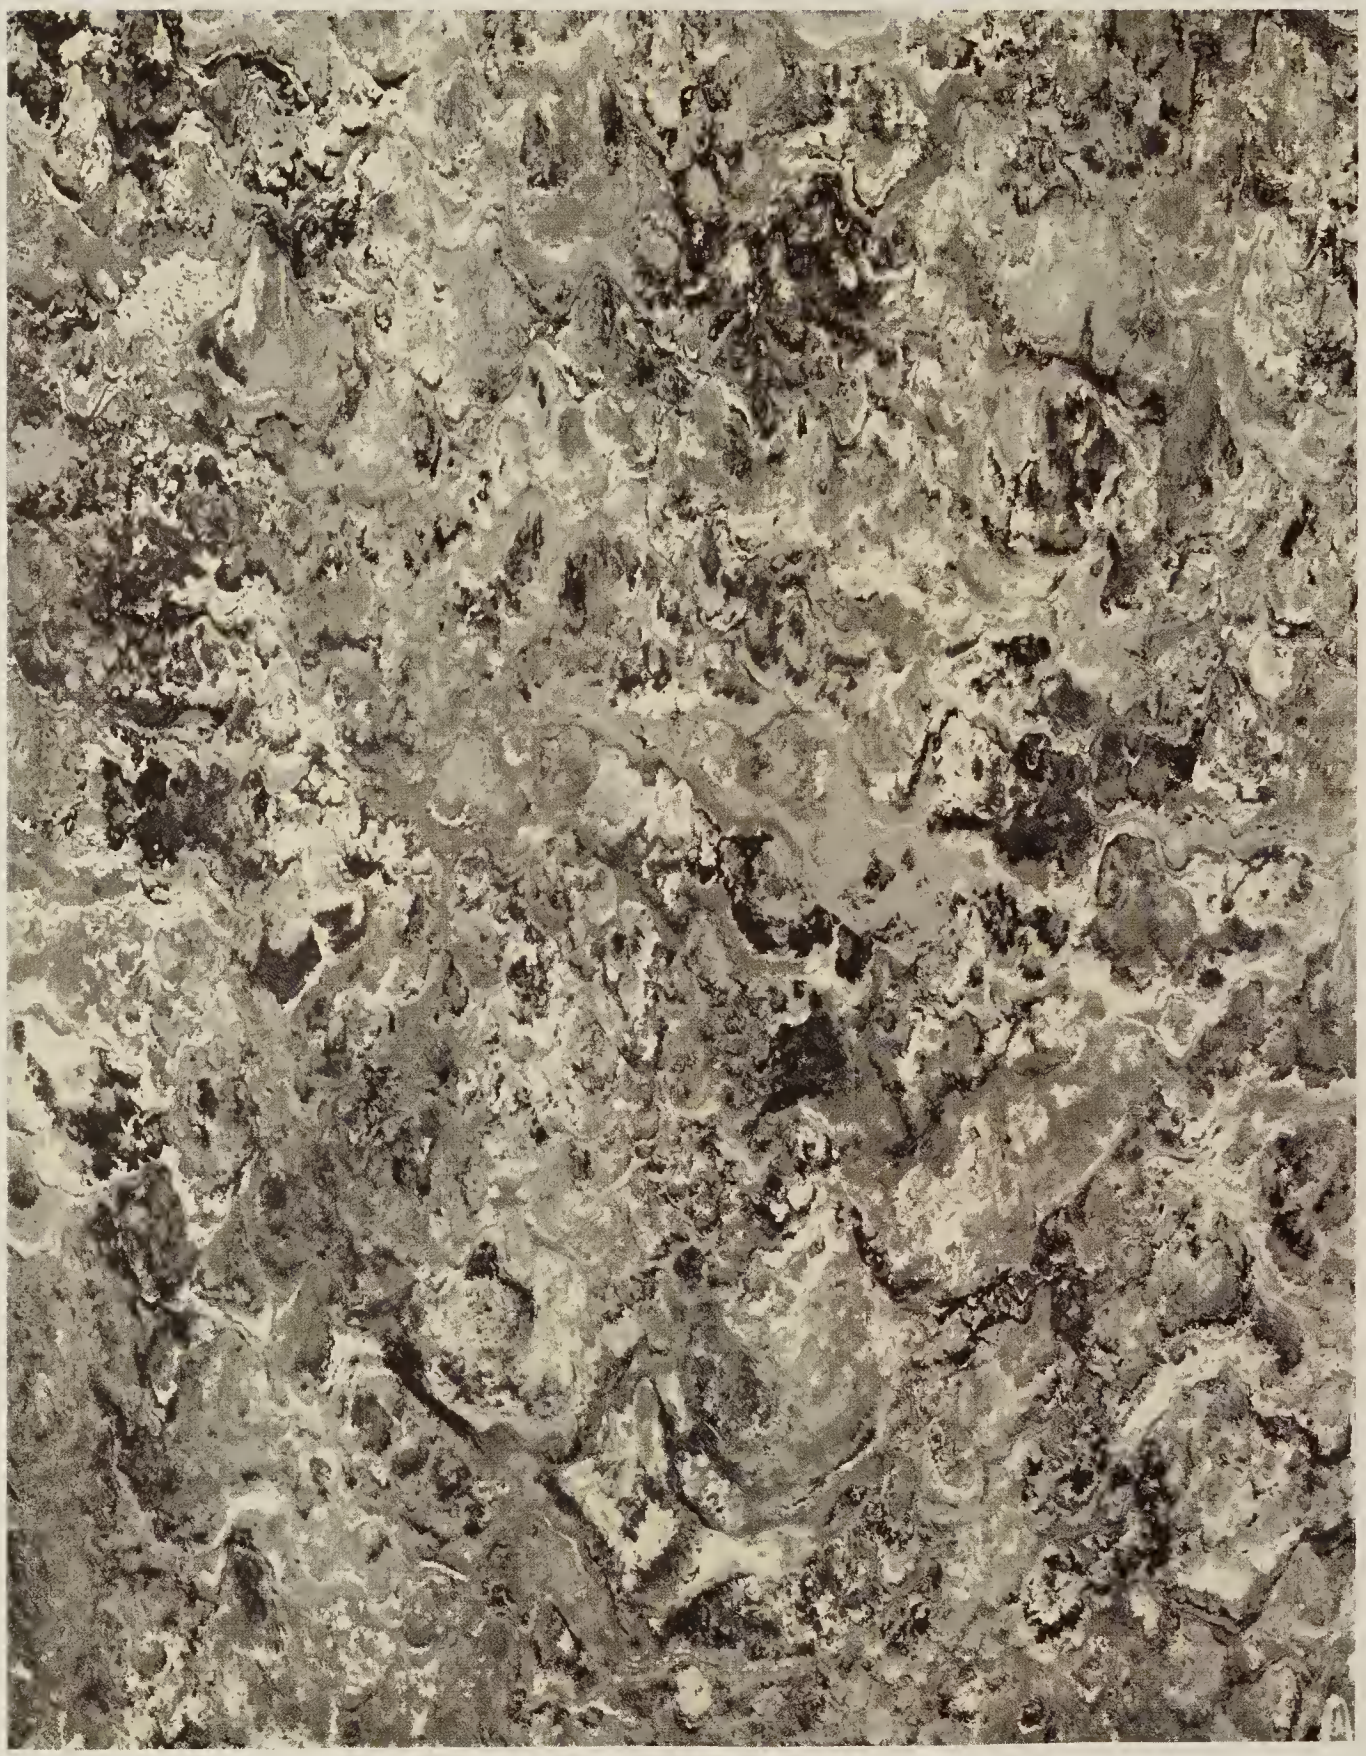

"Paisleygray"

No. 1974—3/16″ Gauge	Code: Paibat
No. 2974—Heavy Gauge	Code: Paisleygray
No. 6974—Medium Gauge	Code: Paigray

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Mahogany Red"

No. 1976—3/16″ Gauge	Code: Ganbat	
No. 2976—Heavy Gauge	Code: Ganred	
No. 6976—Medium Gauge	Code: Gany	
No. A7376—Standard Gauge, Adhesive	Code: Admahogany	
No. 7376—Standard Gauge, Without Adhesive	Code: Gandard	

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

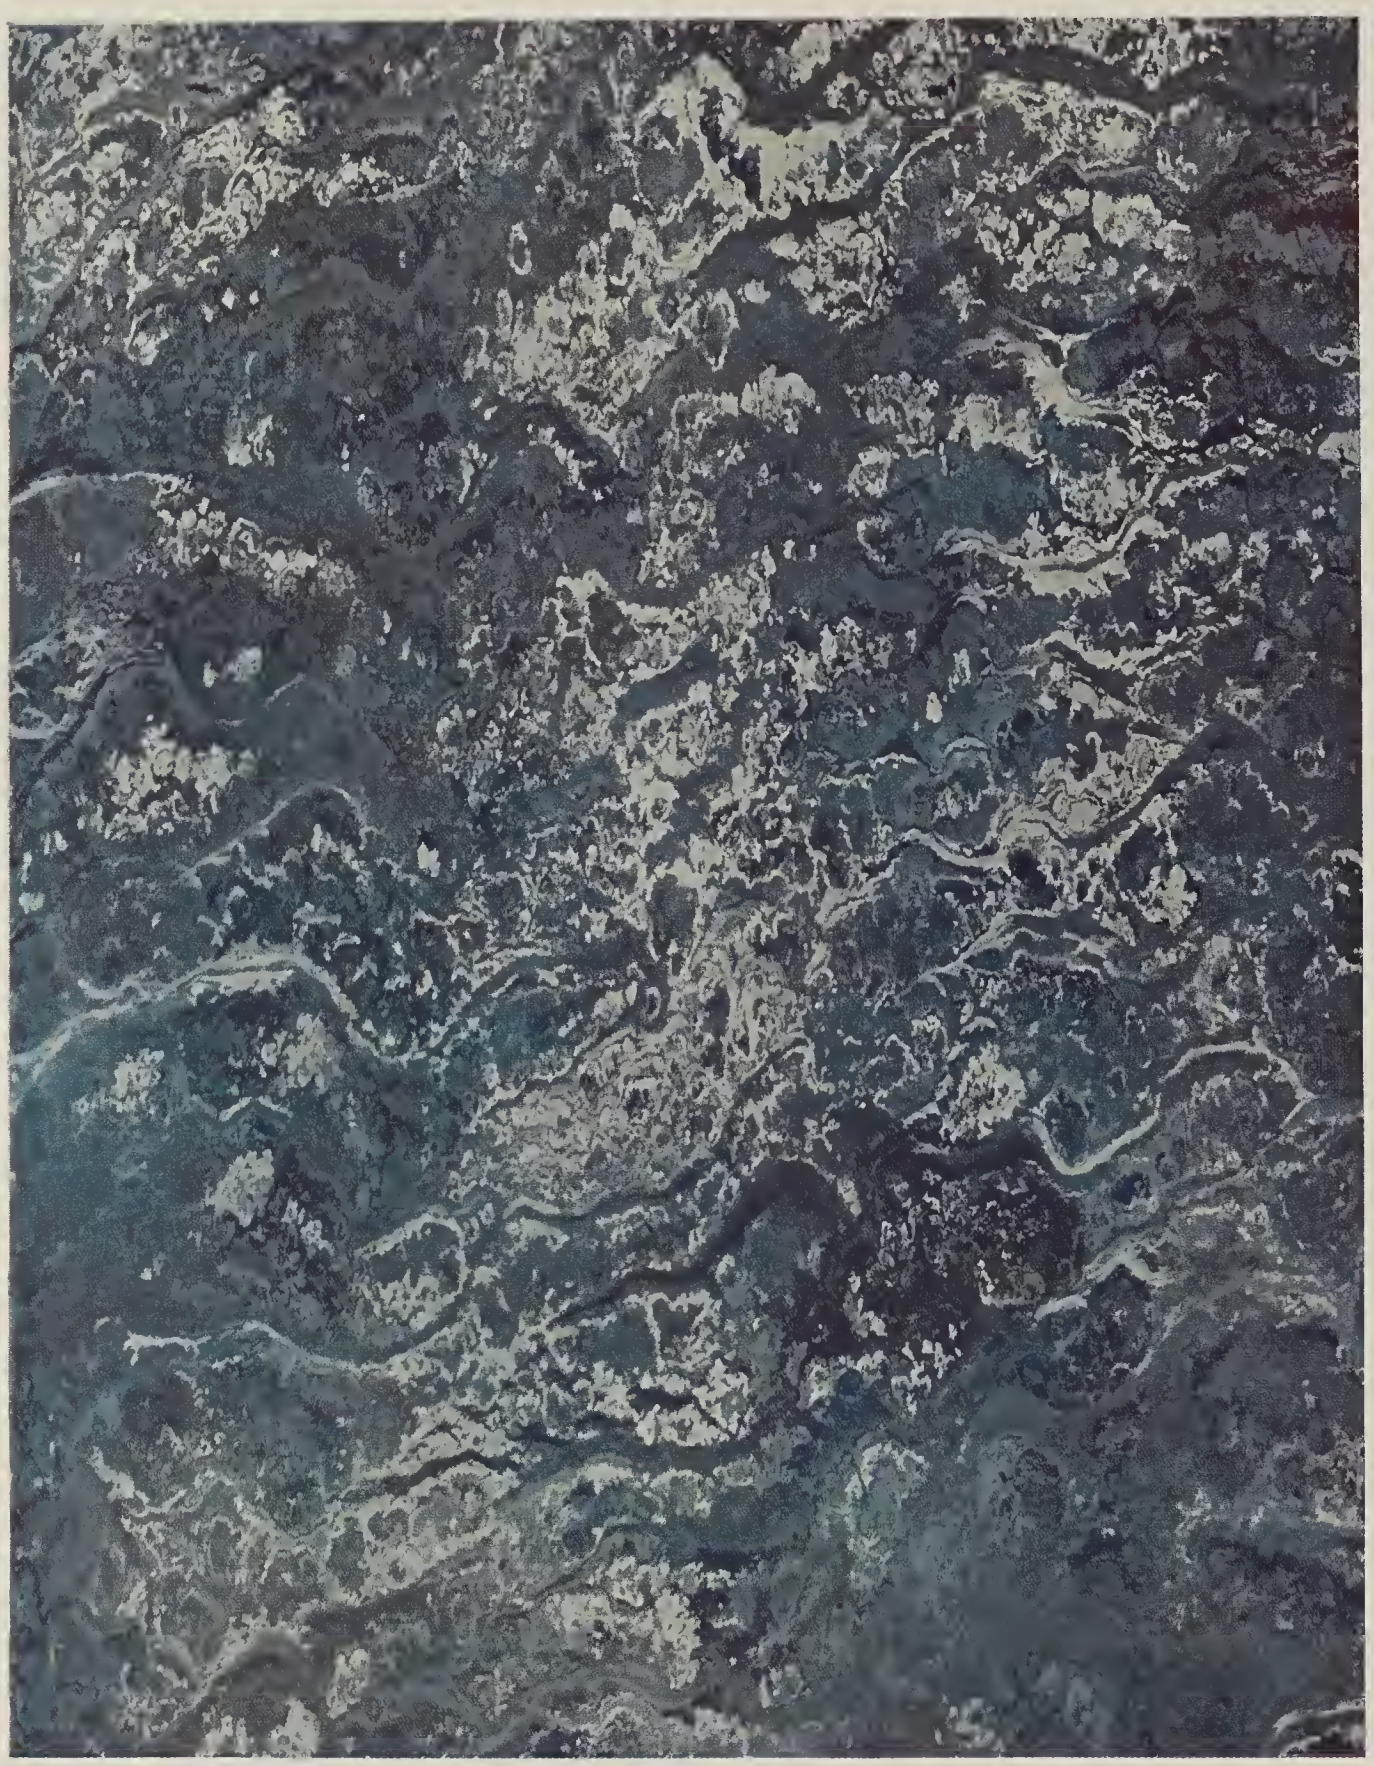

"Delft Blue"

No. 2977	—Heavy Gauge	Code: Delvy
No. 6977	—Medium Gauge	Code: Delft
No. A7377	—Standard Gauge, Adhesive	Code: Addel
No. 7377	—Standard Gauge, Without Adhesive	Code: Del

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Sienna"

No. 1978—3/16″ Gauge — Code: Sienbat
No. 2978—Heavy Gauge — Code: Sienny
No. 6978—Medium Gauge — Code: Siennum

Illustration ¼ scale.

Nairn Linoleum – *Sealex Veltone*

"Rutland"

No.	1980—3/16″ Gauge	Code: Rutbat
No.	2980—Heavy Gauge	Code: Rutley
No.	6980—Medium Gauge	Code: Rutlum
No.	A7380—Standard Gauge, Adhesive	Code: Adrutlard
No.	7380—Standard Gauge, Without Adhesive	Code: Rutdry

Illustration $\frac{1}{4}$ scale.

Nairn Linoleum—*Sealex Veltone*

"Tangier"

No. 2983—Heavy Gauge	Code: Tanvy	
No. 6983—Medium Gauge	Code: Tanum	
No. A7383—Standard Gauge, Adhesive	Code: Adtangier	
No. 7383—Standard Gauge, Without Adhesive	Code: Tangier	

Illustration $^1/_4$ scale.

Nairn Linoleum—*Sealex Veltone*

"*Kenyon*"

No. 2994	—Heavy Gauge	Code: Keny
No. A7394	—Standard Gauge, Adhesive	Code: Adkenyon
No. 7394	—Standard Gauge, Without Adhesive	Code: Kenyon

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"Verde Antique"

No. 1989—3/16″ Gauge — Code: Verbat
No. 2989—Heavy Gauge — Code: Verdy
No. 6989—Medium Gauge — Code: Verdum

Illustration ¼ scale.

Nairn Linoleum—*Sealex Veltone*

"*Kenyon*"

No. 2994	—Heavy Gauge	Code: Keny
No. A7394	—Standard Gauge, Adhesive	Code: Adkenyon
No. 7394	—Standard Gauge, Without Adhesive	Code: Kenyon

Illustration ¼ scale.

Nairn Linoleum – *Sealex Insets – Small*

"LEAVES"—Pattern No. P305. Three sizes each made in all seven colors.

"CRESCENTS"—Pattern No. P303. Three sizes each made in all seven colors.

"DISCS"—Pattern No. P302. Three sizes each made in all seven colors.

"SQUARES"—Pattern No. P304. Three sizes each made in all seven colors.

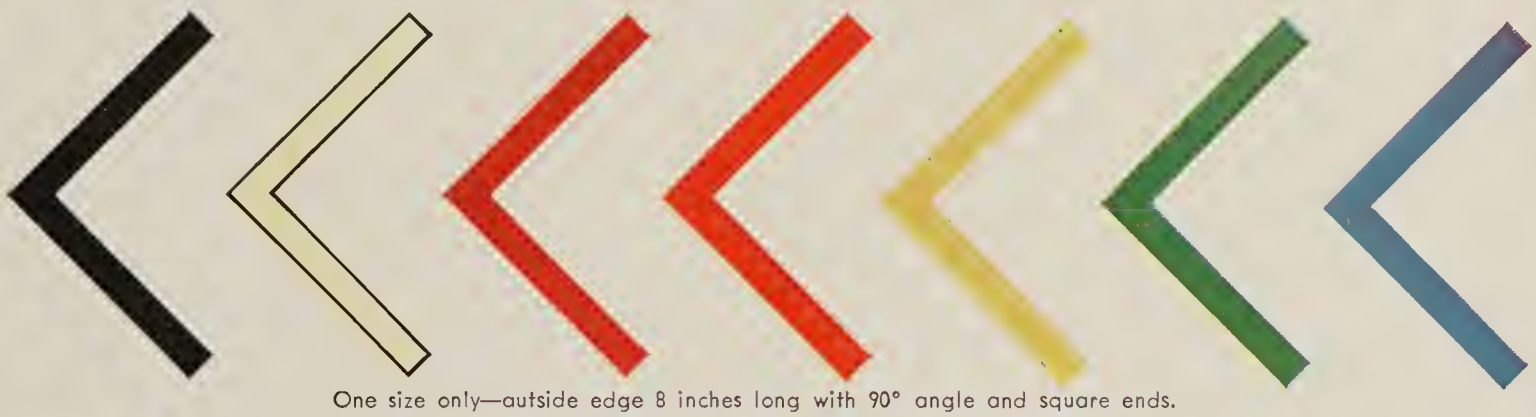

One size only—outside edge 8 inches long with 90° angle and square ends.

"CHEVRONS"—Pattern No. P306. Made in all seven colors.

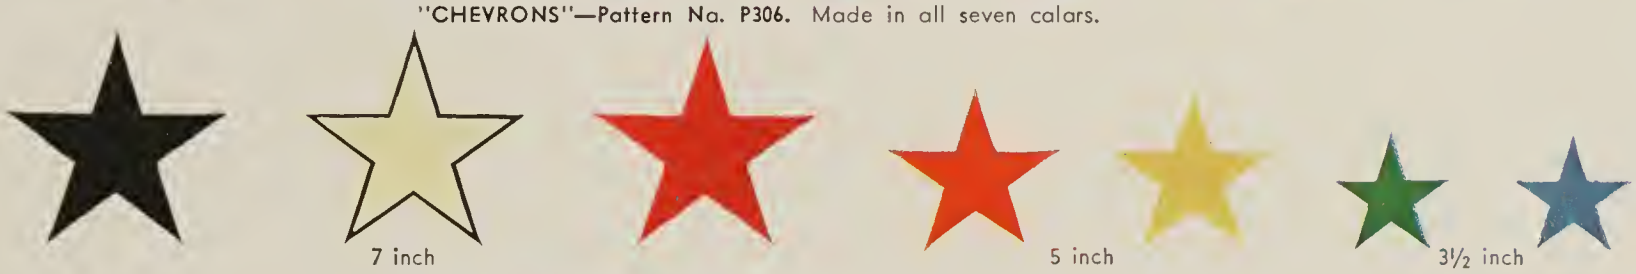

"STARS"—Pattern No. P301. Three sizes each made in all seven colors.

"DIAMONDS"—Pattern No. P308. Three sizes each made in all seven colors and also in Pigskin and Mahogany.

"HEXAGONS"—Pattern No. P307. Three sizes each made in all seven colors and also in Pigskin and Mahogany.

COLOR—Small Sealex Insets are made in following colors in all 3 sizes with exception of "Chevrons" (made in one size only). In ordering, specify color by code letter: viz., Yellow—Y, White—W, Coronation Blue—B, Orange—O, Crimson—R, Emerald Green—G, Black—K.

Note: "Diamonds" and "Hexagons" are available also in Pigskin—T and Mahogany—M.

PACKAGING: All small Sealex Insets are available in two types of packages as follows:

Small Packing: 18 of one size and one color to the carton.

Large Packing: Small size, 72 units to a carton, medium size, 54 units to a carton, large size, 36 units to a carton. All one color, one size and one design to a carton.

EXCEPTION: "Chevrons" are packed 24 units of one color to the carton—**all one size.**

GAUGE—All small Sealex Insets are cut from Standard Gauge materials. Felt templates in two thicknesses—.022 inch and .042 inch—are supplied with each inset to be used with either Medium or Heavy Gauge installations.

NOTE: For emphasis, White Sealex Insets are shown here with black outline. Actual Insets are cut from White Sealex Plain Linoleum and have no black edge.

Nairn Linoleum—*Sealex Veltone*

"*Kenyon*"

No. 2994	—Heavy Gauge	Code: Keny
No. A7394	—Standard Gauge, Adhesive	Code: Adkenyon
No. 7394	—Standard Gauge, Without Adhesive	Code: Kenyon

Illustration ¼ scale.

Nairn Linoleum—*Sealex Insets—9 inch*

PACKAGING: All the 9 inch insets shown on this page (except No. P50) are packed four to the carton; two each of positives and negatives with four pieces of .022″ and .042″ felt templates supplied for shimming purposes.

"ROSETTE" insets are made in following color combinations.

No. P43—Pacific Blue and White
No. P44—Emerald Green and White
No. P45—Pigskin and Mahogany
No. P46—Black and White
No. P47—Crimson and Black

"TEA KETTLE"—No. P52
Crimson on White — White on Crimson

"HOUR GLASS"—No. P36
Mahogany on Orange — Orange on Mahogany

"DUCKS IN FLIGHT"—No. P33
Pigskin on Mahogany — Mahogany on Pigskin

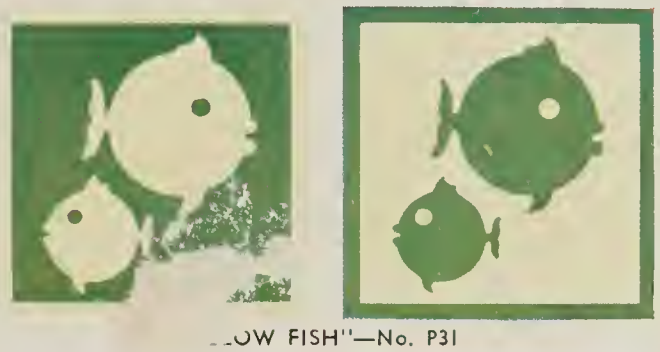

"YELLOW FISH"—No. P31
White on Emerald Green — Emerald Green on White

"SCOTTIE DOG"—No. P32
Black on White — White on Black

"CHERRIES"—No. P35
Crimson on White — White on Crimson

"PEASANT FLOWER"—No. P37
Yellow on Emerald Green — Emerald Green on Yellow

"ROOSTER"—No. P29
Crimson on White — White on Crimson

"SAIL BOAT"—No. P34
White on Coronation Blue — Coronation Blue on White

"COMPASS"—No. P50 (9 inch) Packed three to a carton; one each of above three color schemes.

"ROSETTE"—No. P47

"ROSETTE"—No. P47

"ROSETTE"—No. P43

"ROSETTE"—No. P43

"ROSETTE"—No. P45

"ROSETTE"—No. P45

"ROSETTE"—No. P44

"ROSETTE"—No. P44

"ROSETTE"—No. P46

"ROSETTE"—No. P46

"ROSETTE" insets are packed four to a carton; two each of the positive and two each of the negative for each color scheme.

Nairn Linoleum—*Sealex Veltone*

"Kenyon"

No. 2994	—Heavy Gauge	Code: Keny
No. A7394	—Standard Gauge, Adhesive	Code: Adkenyon
No. 7394	—Standard Gauge, Without Adhesive	Code: Kenyon

Illustration ¼ scale.

Nairn Linoleum—*Sealex Battleship and Plain*

"Craft Brown" Battleship No. 1000 6.00 mm., 3/16", 1/8" Ga.
Plain No. 1100 Medium, Standard Ga.

"Moss Green" Battleship No. 1001 3/16", 1/8" Gauges
Plain No. 1101 Medium, Standard Ga.

"Terra Cotta" Battleship No. 1002 3/16", 1/8" Gauges
Plain No. 1102 Medium, Standard Ga.

"Slate Gray" Battleship No. 1003 3/16", 1/8" Gauges
Plain No. 1103 Medium, Standard Ga.

"Mahogany" Battleship No. 1004 3/16", 1/8" Gauges
Plain No. 1104 Medium, Standard Ga.

"Black" Battleship No. 1005 3/16", 1/8" Gauges
Plain No. 1105 Medium, Standard Gauges
Plain No. A1105 (Adhesive Back) Standard Ga.

NAIRN LINOLEUM—Sealex Battleship and Plain—are available in 23 attractive colors, ranging from white to jet black. Here, the architect finds a resilient flooring which is adaptable to all decorative and practical requirements.

Nairn Sealex Battleship adapts itself ideally to those commercial areas where decoration is not the major feature but where long life and utility are necessary requirements. In the brighter colors, Nairn Sealex Plain Linoleum may be used in specially designed floors to create decorative backgrounds for interiors of practically any type.

This type of linoleum should be used on commercial work in at least 1/8" thickness. The medium and standard gauges are intended for residential purposes only.

Battleship Linoleum is available in three gauges: 6 mm., 3/16" and 1/8". Plain linoleum is available in three gauges: 1/8", medium and standard.

Nairn Linoleum—*Sealex Plain*

"Yellow" Plain No. 1110 ⅛", Medium, Standard Gauges

"White" Plain No. 1113 ⅛", Medium, Standard Gauges

"Pacific Blue" Plain No. 1114 ⅛", Medium, Standard Gauges

"Olympic Blue" Plain No. 1116 ⅛", Medium, Standard Gauges

"Coffee Brown" Plain No. 1118 ⅛", Medium, Standard Gauges

"Jade Green" Plain No. 1119 ⅛", Medium, Standard Gauges

TODAY'S TREND for floor treatment in many interiors swings definitely toward the use of plain linoleum for several reasons. Because it provides a rich expanse of color from wall to wall which tends to enlarge the floor space. Because solid colors enhance and harmonize with any period design. Because they simplify the interior decorating problem. And because the satin-smooth surface of Nairn Linoleum is sanitary, superlatively easy to clean, and requires no upkeep expense for many years except for occasional waxing.

Nairn Linoleum—*Sealex Plain*

"Ivy Green" Plain No. 1120 ⅛", Medium, Standard Gauges

"Cherry Red" Plain No. 1122 ⅛", Medium, Standard Gauges

"Pearl Gray" Plain No. 1123 ⅛", Medium, Standard Gauges

"Citron Green" Plain No. 1124 ⅛", Medium, Standard Gauges

"Coronation Blue" Plain No. 1125 ⅛", Medium, Standard Ga.

"Orange" Plain No. 1126 ⅛", Medium, Standard Gauges

CONGOLEUM-NAIRN has standardized on 23 different colorings in their lines of Nairn Battleship and Plain Linoleum. All are expertly color-correlated to other Congoleum-Nairn commodities including Nairn Sealex Veltone, Nairn Sealex Karnean, Nairn Treadlite, Nairn Wall Linoleum, Nairn Sealex Jaspé and last, but not least, Nairn Sealex Insets, Borders and Feature Strips. All combine to provide practically unlimited possibilities in "Personal-izing" the floors of any residential or commercial installation.

Nairn Linoleum – *Sealex Plain*

"Crimson" **Plain No. 1127** ⅛", Medium, Standard Gauges

"Emerald Green" **Plain No. 1128** ⅛", Medium, Standard Ga.

"Coral" **Plain No. 1129** ⅛", Medium, Standard Gauges

"Pigskin" **Plain No. 1130** ⅛", Medium, Standard Gauges

"Marine Blue" **Plain No. 1131** ⅛", Medium, Standard Gauges

NAIRN LINOLEUM—Sealex Battleship and Sealex Plain comply in every respect with the exacting requirements of U. S. Government specifications. They are made from the best grades of linseed oil, driers, gums, cork and pigments, all combined into a material of dense composition—a truly resilient, easily cleaned, and thoroughly economical heavy-duty floor-covering. A complete rainbow of colorings is available to satisfy every wish of the most exacting architect in creating his own "Personal-ized Floors" of Nairn Linoleum.

Nairn Linoleum – *Sealex Borders & Feature Strips*

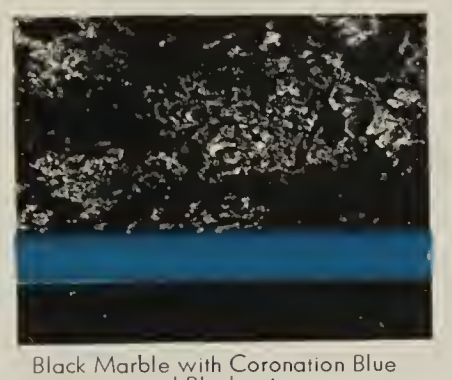

Black Marble with Coronation Blue and Black strip

Pat. No.	Gauge	Width	Code
No.1385	Medium	9 inches	Zeatl
No.1385	Medium	12 inches	Zeawn
No.1385	Medium	15 inches	Zebar
No.A1395	Std.Adh.	9 inches	Zebit
No.A1395	Std.Adh.	12 inches	Zebov
No.A1395	Std.Adh.	15 inches	Zebse

60 to 90 ft. lengths to a roll

Black Marble with Green and Black strip

Pat. No.	Gauge	Width	Code
No.1388	Medium	9 inches	Zedoy
No.1388	Medium	12 inches	Zedta
No.1388	Medium	15 inches	Zeduz
No.A1398	Std.Adh.	9 inches	Zedve
No.A1398	Std.Adh.	12 inches	Zedyo
No.A1398	Std.Adh.	15 inches	Zeebs

60 to 90 ft. lengths to a roll

Black Marble with Orange and Black strip

Pat. No.	Gauge	Width	Code
No.1386	Medium	9 inches	Zebvo
No.1386	Medium	12 inches	Zebyx
No.1386	Medium	15 inches	Zecas
No.A1396	Std.Adh.	9 inches	Zecet
No.A1396	Std.Adh.	12 inches	Zeciv
No.A1396	Std.Adh.	15 inches	Zecsa

60 to 90 ft. lengths to a roll

BORDER STRIPS shown below are available in 1 inch and 1½ inch widths in heavy, medium and standard gauges, packed 45 feet to a roll. When ordering specify number, width and gauge wanted.

Black with Ivory White strip

Pat. No.	Gauge	Width	Code
No.1361	Medium	9 inches	Zeerk
No.1361	Medium	12 inches	Zeewp
Na.1361	Medium	15 inches	Zefav
No.A1371	Std.Adh.	9 inches	Zefix
No.A1371	Std.Adh.	12 inches	Zefoz
No.A1371	Std.Adh.	15 inches	Zefub

60 to 90 ft. lengths to a roll

Black with Coronation Blue strip

Pat. No.	Gauge	Width	Code
No.1365	Medium	9 inches	Zefva
No.1365	Medium	12 inches	Zefwe
No.1365	Medium	15 inches	Zefzo
No.A1375	Std.Adh.	9 inches	Zegbo
No.A1375	Std.Adh.	12 inches	Zegiz
No.A1375	Std.Adh.	15 inches	Zegob

60 to 90 ft. lengths to a roll

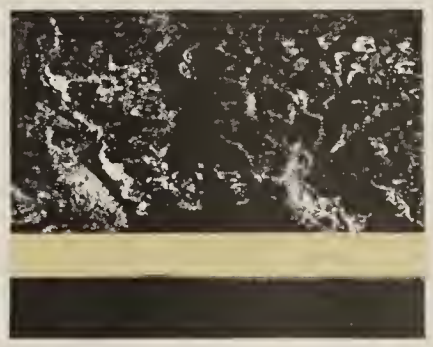

Black Marble with Ivory White and Black strip

Pat. No.	Gauge	Width	Code
No.1381	Medium	9 inches	Zeahy
No.1381	Medium	12 inches	Zealc
No.1381	Medium	15 inches	Zeand
No.A1391	Std.Adh.	9 inches	Zeanf
No.A1391	Std.Adh.	12 inches	Zearj
No.A1391	Std.Adh.	15 inches	Zeask

60 to 90 ft. lengths to a roll



"CRAFT BROWN"—No. 1100



"MOSS GREEN"—No. 1101



"TERRA COTTA"—No. 1102

"SLATE GRAY"—No. 1103



"MAHOGANY"—No. 1104

"BLACK"—No. 1105

"YELLOW"—No. 1110

"WHITE"—No. 1113



"PACIFIC BLUE"—No. 1114

"OLYMPIC BLUE"—No. 1116



"COFFEE BROWN"—No. 1118

"JADE GREEN"—No. 1119



"IVY GREEN"—No. 1120

"CHERRY RED"—No. 1122



"PEARL GRAY"—No. 1123

"CITRON GREEN"—No. 1124



"CORONATION BLUE"—No. 1125

"ORANGE"—No. 1126



"CRIMSON"—No. 1127

"EMERALD GREEN"—No. 1128

"CORAL"—No. 1129

"PIGSKIN"—No. 1130



"MARINE BLUE"—No. 1131

Black with Crimson strip

Pat. No.	Gauge	Width	Code
No.1367	Medium	9 inches	Zehib
No.1367	Medium	12 inches	Zehoc
No.1367	Medium	15 inches	Zehud
No.A1377	Std.Adh.	9 inches	Zehya
Na.A1377	Std.Adh.	12 inches	Zehze
No.A1377	Std.Adh.	15 inches	Zeibt

60 to 90 ft. lengths to a roll

Black with Emerald Green strip

Pot. No.	Gauge	Width	Code
No.1368	Medium	9 inches	Zeify
No.1368	Medium	12 inches	Zeikd
No.1368	Medium	15 inches	Zeilf
No.A1378	Std.Adh.	9 inches	Zeirl
No.A1378	Std.Adh.	12 inches	Zejaz
No.A1378	Std.Adh.	15 inches	Zejbe

60 to 90 ft. lengths to a roll

Black Marble with Crimson and Black strip

Pat. No.	Gauge	Width	Code
No.1387	Medium	9 inches	Zecte
No.1387	Medium	12 inches	Zecux
No.1387	Medium	15 inches	Zecwo
No.A1397	Std.Adh.	9 inches	Zeczy
No.A1397	Std.Adh.	12 inches	Zedat
No.A1397	Std.Adh.	15 inches	Zedev

60 to 90 ft. lengths to a roll

Black with Yellow strip

Pat. No.	Gauge	Width	Code
No.1369	Medium	9 inches	Zejdo
No.1369	Medium	12 inches	Zejeb
No.1369	Medium	15 inches	Zejic
No.A1379	Std.Adh.	9 inches	Zejod
No.A1379	Std.Adh.	12 inches	Zejuf
No.A1379	Std.Adh.	15 inches	Zejyg

60 to 90 ft. lengths to a roll

Block with Orange strip

Pat. No.	Gauge	Width	Code
No.1366	Medium	9 inches	Zeguc
No.1366	Medium	12 inches	Zegwa
No.1366	Medium	15 inches	Zegye
No.A1376	Std.Adh.	9 inches	Zehay
No.A1376	Std.Adh.	12 inches	Zehco
No.A1376	Std.Adh.	15 inches	Zehez

60 to 90 ft. lengths to a roll

Black Morble with Yellow and Black strip

Pat. No.	Gauge	Width	Code
No.1389	Medium	9 inches	Zeect
No.1389	Medium	12 inches	Zeegy
No.1389	Medium	15 inches	Zeeld
No.A1399	Std.Adh.	9 inches	Zeemf
No.A1399	Std.Adh.	12 inches	Zeeng
No.A1399	Std.Adh.	15 inches	Zeeph

60 to 90 ft. lengths to a roll

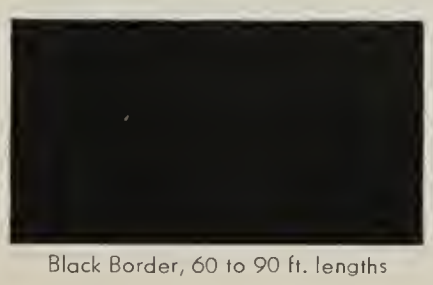

Black Border, 60 to 90 ft. lengths

Pat.No.	Gauge	Width	Code
1300	Heavy	9 in.	Blackbor
1301	Heavy	12 in.	Blackband
1302	Medium	9 in.	Blackedge
1303	Medium	12 in.	Blacktrim
A1316	Std.Adh.	9 in.	Adblackmar
1316	Standard	9 in.	Blackmar
A1319	Std.Adh.	12 in.	Adblacktill
1319	Standard	12 in.	Blacktill

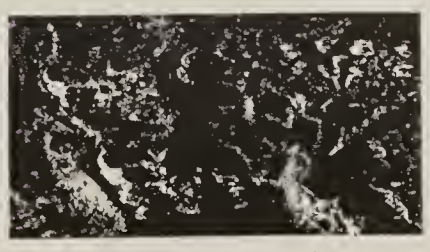

Black Marble Border, 60 to 90 ft. lengths

Pat.No.	Gauge	Width	Code
1310	Heavy	9 in.	Parienbor
1311	Heavy	12 in.	Parienband
1312	Medium	9 in.	Parienedge
1313	Medium	12 in.	Parientrim
A1314	Std.Adh.	9 in.	Adparienmar
1314	Standard	9 in.	Parienmar
A1315	Std.Adh.	12 in.	Adparientill
1315	Standard	12 in.	Parientill

Nairn Cork Carpet

Nairn Cork Carpet is used as a floor in areas where extreme quiet and resilience are demanded, and also provides ideal bulletin boards, or tack boards.

Pattern No. 1200

Pattern No. 1201

Pattern No.	Unpolished	Polished.
1200	(.250″—6.35 mm)	(.236″—6.00 mm)
1201	(.250″—6.35 mm)	(.236″—6.00 mm)

No. 1701—3.00 mm Gauge—6 ft. wide

Nairn Desk Top Linoleum

Nairn Desk Top Linoleum is one of the smartest, most practical suggestions for desk tops that has ever been developed.

A desk is more comfortable and easier to work on with a Nairn Linoleum top. It is quiet, long-wearing and resilient. Excellent for cabinet tops and office tables, too. Smart for its practical points—smart for its better looks. Desks, cabinets and tables last longer—look better.

No. 1702—3.00 mm Gauge—6 ft. wide

No. 1703—3.00 mm Gauge—6 ft. wide

No. 1705—3.00 mm Gauge—6 ft. wide

No. 1706—3.00 mm Gauge—6 ft. wide

Nairn Linoleum – *Sealex Jaspé*

"Taupe" — **Pattern No. 1251**
Made in 3/16″ Gauge and 1/8″ Gauge

"Dark Gray" — **Pattern No. 1252**
Made in 3/16″ Gauge and 1/8″ Gauge

"Tan" — **Pattern No. 1253**
Made in 3/16″ Gauge and 1/8″ Gauge

"Brown" — **Pattern No. 1254**
Made in 3/16″ Gauge and 1/8″ Gauge

Nairn Linoleum – *Sealex Jaspé*

For a restrained decorative treatment, the fine-lined striations of Nairn Sealex Jaspé Linoleum—in rich, soft colors, make it a universal favorite. Like all Nairn Linoleum, it is sanitary and inexpensive to maintain, thanks to the Nairn Sealex Process by which each minute linoleum pore is hermetically sealed against penetration of dust and dirt.

Nairn Sealex Jaspé Linoleum is widely used in areas where a subdued but decorative two-tone effect is desired.

Nairn Linoleum – *Sealex Jaspé*

"Light Gray" — Pattern No. 1255
Made in 3/16″ Gauge and 1/8″ Gauge

"Dark Green" — Pattern No. 1256
Made in 3/16″ Gauge and 1/8″ Gauge

"Blue" — Pattern No. 1260
Made in 1/8″ Gauge and Standard Gauge

"Light Beige" — Pattern No. 1261
Made in 1/8″ Gauge and Standard Gauge

"Copper" — Pattern No. 1262
Made in 1/8″ Gauge and Standard Gauge

Nairn Wall Linoleum

INCREASING POPULARITY among home owners, architects, contractors and real estate men has made Nairn Wall Linoleum the outstanding new trend in the whole field of wall decoration. No wonder! Even in more costly materials, you can get only a few of the advantages of Nairn Wall Linoleum. And you can't get all of its advantages in any other material at any price!

In the first place, Nairn Wall Linoleum is the most flexible decorative wall material of the day. Congoleum-Nairn's designers have created here the most beautiful color line obtainable. Just look at the following pages and see the wide range of its delicately rich colors . . . from subtle pastel tones to natural woodgrain reproductions.

Further, Nairn Wall Linoleum is definitely the most practical material for walls. The colors are color-fast . . . for they're inlaid clear through to the back. Washable, it's a most sanitary and easy-to-keep-clean material. And it's actually more economical because Nairn Linoleum Walls last indefinitely. Repainting and repapering expenses are eliminated.

Remember, the entire line of Nairn Wall Linoleum is skillfully color-correlated with Nairn Linoleum for floors. This provides the customer unlimited decorative possibilities for any room.

"Carnelian"

No. 7958

Code: Ubel

Illustration ¼ scale.

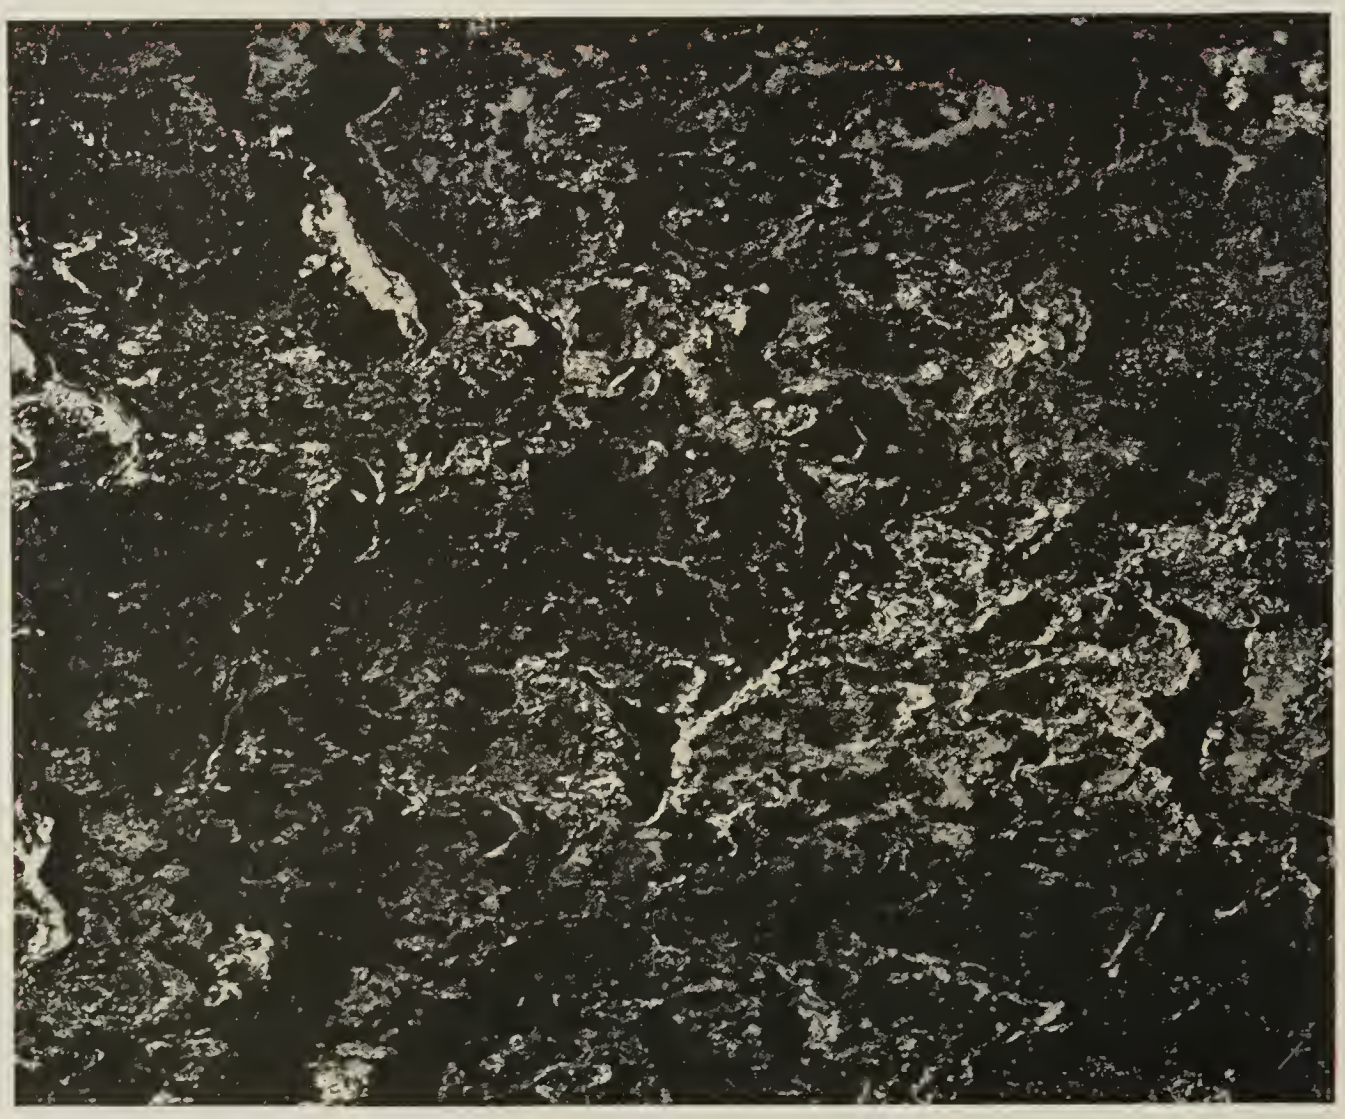

"Black Onyx"

No. 7959

Code: Ubor

Also available in one inch strips packed 75 feet to a carton. Code: Uborline.

Illustration ¼ scale.

Nairn Wall Linoleum

"Sunstone"
No. 7960
Code: Ucab
Illustration ¼ scale.

"Sardonyx"
No. 7963
Code: Ucon
Illustration ¼ scale.

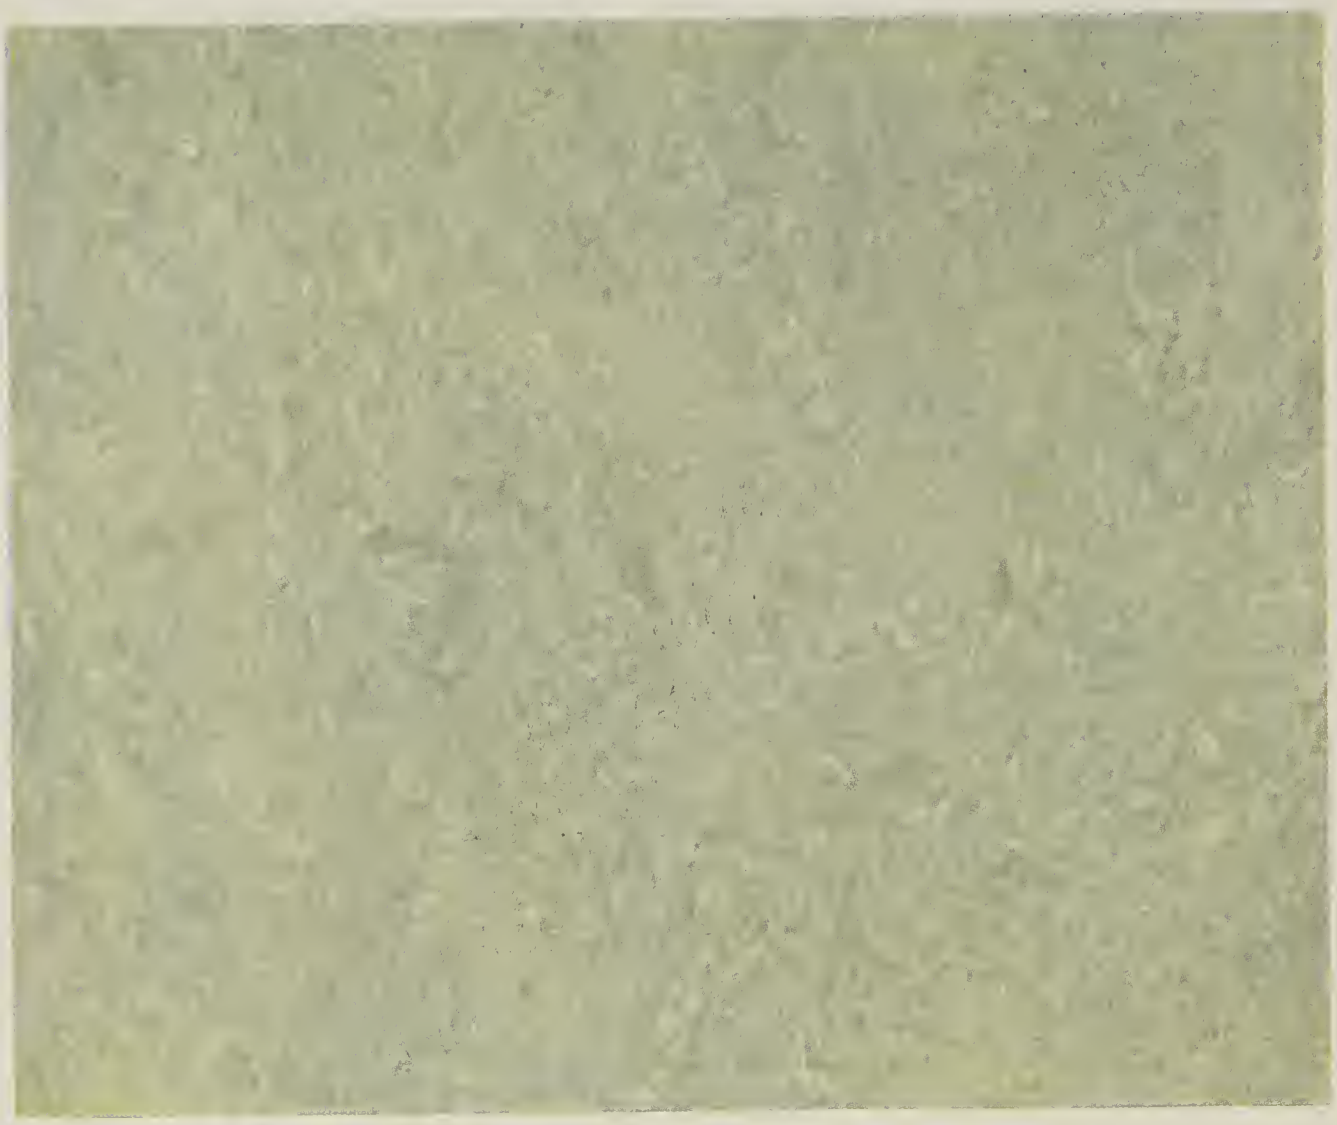

"Green Beryl"
No. 7971
Code: Ulmon
Illustration ¼ scale

"Zircon"
No. 7972
Code: Union
Illustration ¼ scale

Nairn Wall Linoleum

"Parchment"
No. 7973
Code: Upar
Illustration ¼ scale.

"Coral"
No. 7975
Code: Ular
Illustration ¼ scale.

"Marble White"

No. 7977

Code: Urod

Illustration ¼ scale.

"Light Pine"

No. 7981

Code: Upex

Illustration ¼ scale.

Nairn Wall Linoleum

"Green Onyx"

No. 7985

Code: Utel

Also available in one inch strips packed 75 feet to a carton. Code: Utelline.

Illustration ¼ scale.

"American Walnut"

No. 7982

Code: Usur

Illustration ¼ scale.

"Maize"
No. 7987
Code: Udeb
Illustration ¼ scale

"Azure"
No. 7988
Code: Udin
Illustration ¼ scale

Nairn Wall Linoleum

"Rose Agate"
No. 7989
Code: Udoc
Illustration ¼ scale.

"Parian Red"
No. 7992
Code: Ubart
Illustration ¼ scale.

"Cerulean"
No. 7993
Code: Udell
Illustration ¼ scale

"Tourmaline"
No. 7994
Code: Ulsed
Illustration ¼ scale

Nairn Wall Linoleum

"White Amber"
No. 7995
Code: Unlid
Illustration ¼ scale.

"Moonstone"
No. 7996
Code: Urban
Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

HEAVY GAUGE

WHEN THE DEMAND IS FOR "NOTHING BUT THE VERY BEST IN PATTERN GOODS" for public buildings and finer homes, the answer is Nairn Sealex Karnean Heavy. Here is the absolute top in quality for this type of merchandise. It opens up many opportunities in higher-grade installations.

Nairn Sealex Karnean Heavy withstands the most punishing foot-traffic. It will keep its beauty year after year.

Its rich marbleizing and impressive large-scale patterns make Nairn Sealex Karnean Heavy the ideal floor for spacious areas in public and commercial buildings. The smaller tile effects are particularly suited for finer residential interiors.

Just check over the list of possibilities for Nairn Sealex Karnean Heavy Gauge! Hospitals, churches, schools, clubs, restaurants, stores and fine homes.

For Nairn Sealex Karnean Heavy Gauge is by far the most satisfactory pattern goods for use in areas where there is plenty of traffic.

Actual thickness of Nairn Sealex Karnean Heavy Gauge is .125 inch or 3.18 mm.

Nairn Linoleum – *Sealex Karnean*

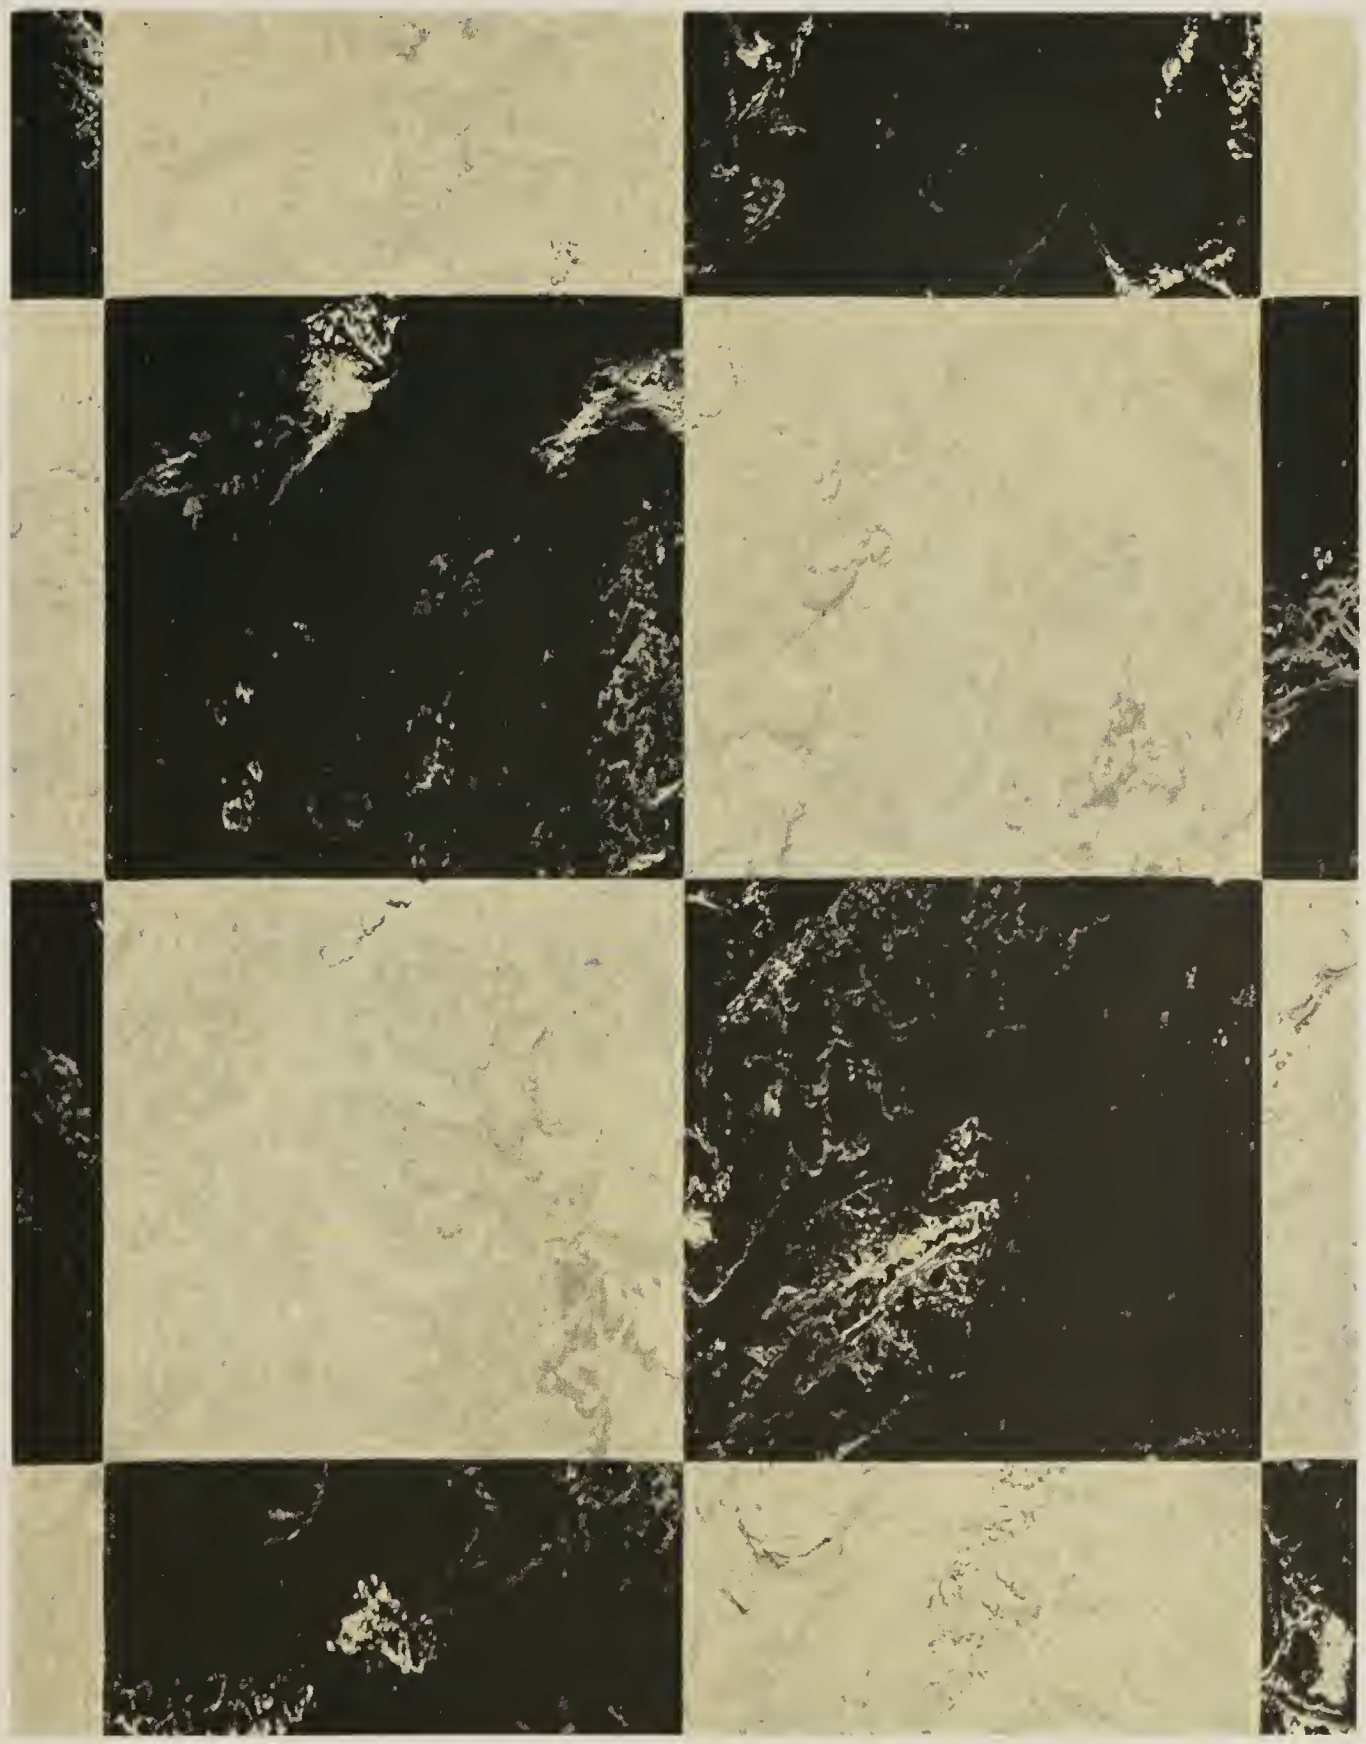

"Deauville"

No. 3041—Heavy Gauge

Code: Deauville

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

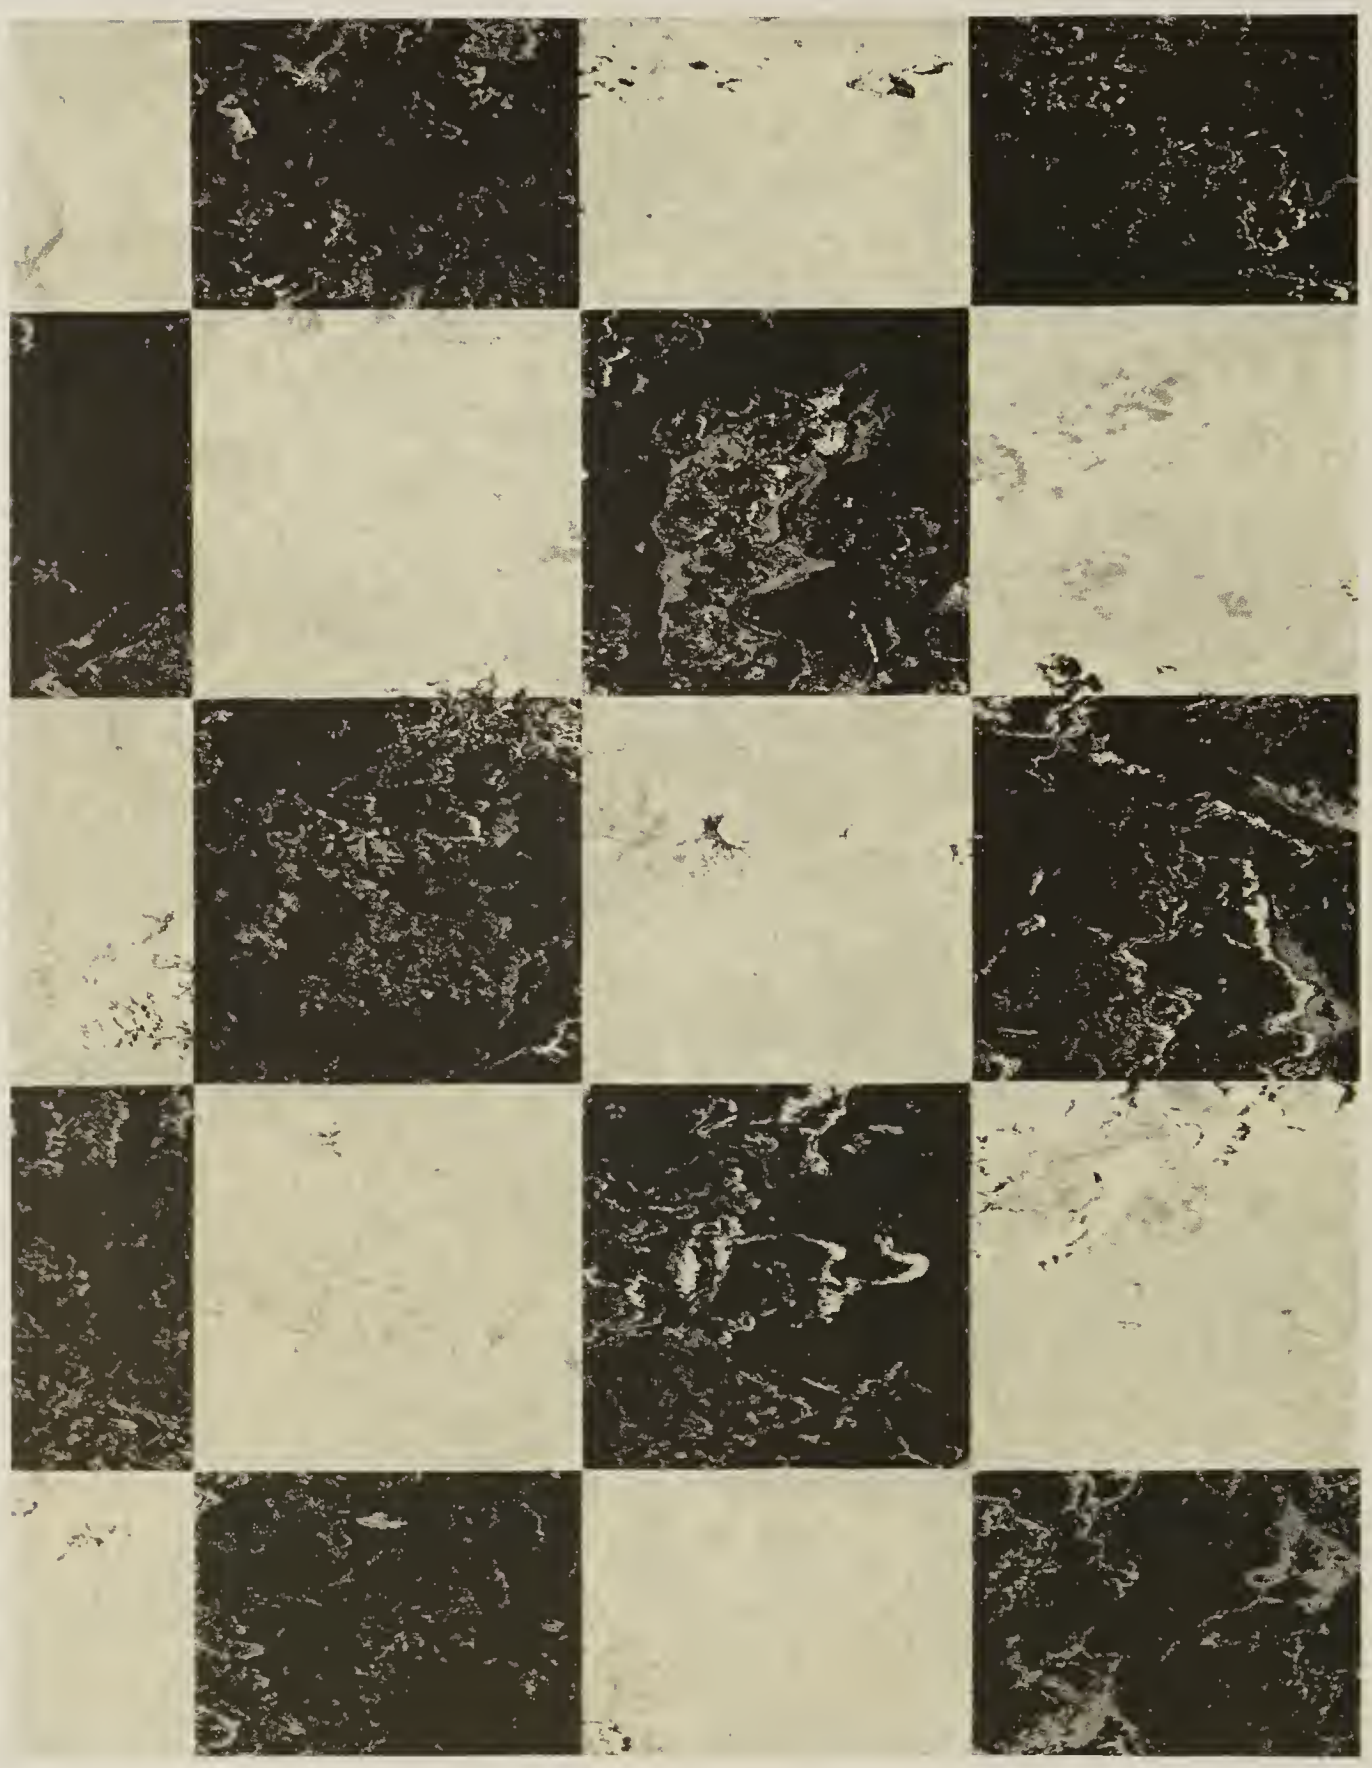

"Foyer"

No. 3104—Heavy Gauge

Code: Foyer

Actual size of tiles: 6″ x 6″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Eldorado"

No. 3222—Heavy Gauge

Code: Eldorado

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

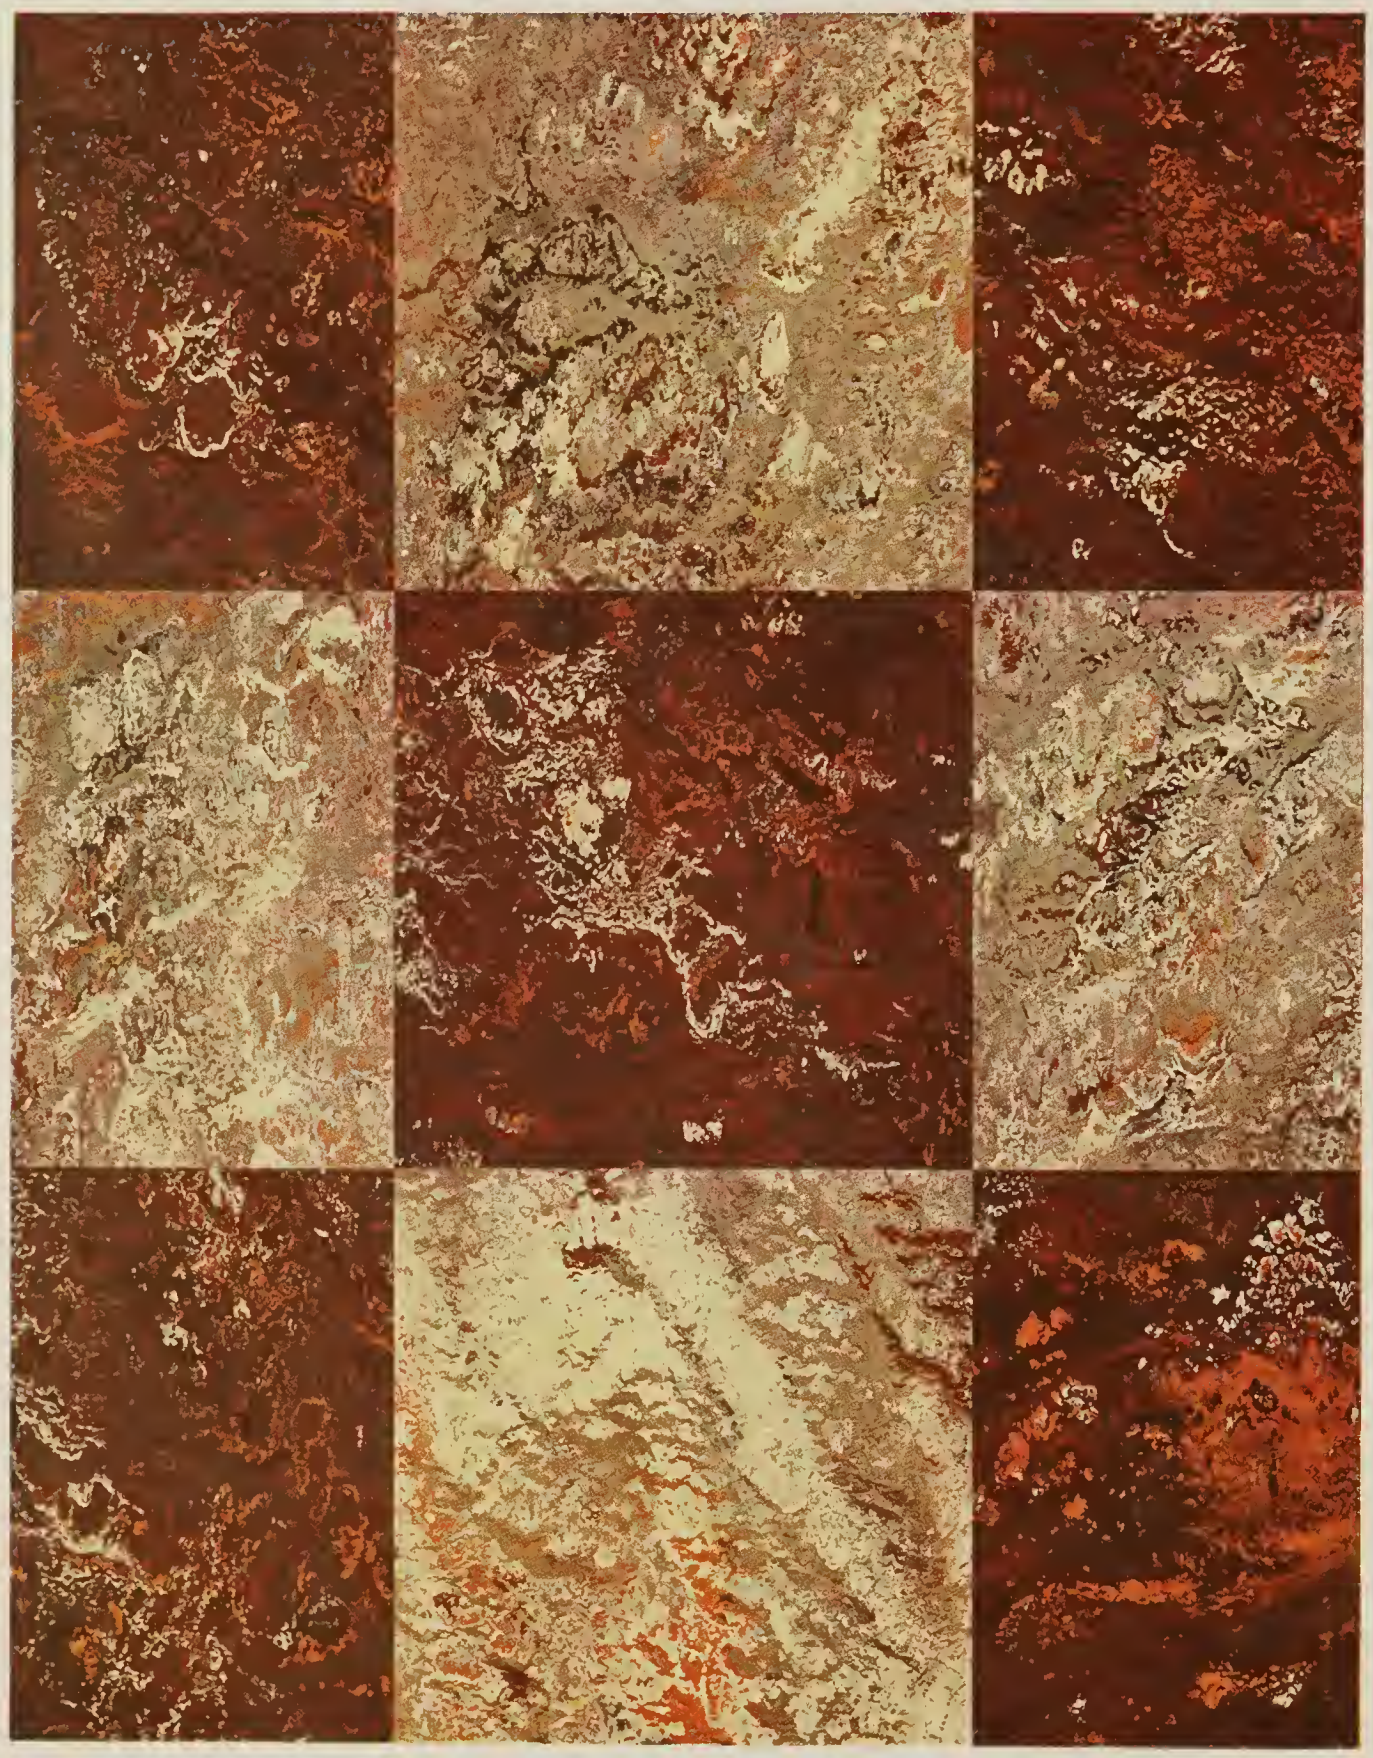

"Chateau"

No. 3256—Heavy Gauge

Code: Chateau

Actual Size of tiles; 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Orleans"

No. 3270—Heavy Gauge

Illustration ¼ scale.

Code: Orleans

Nairn Linoleum—*Sealex Karnean*

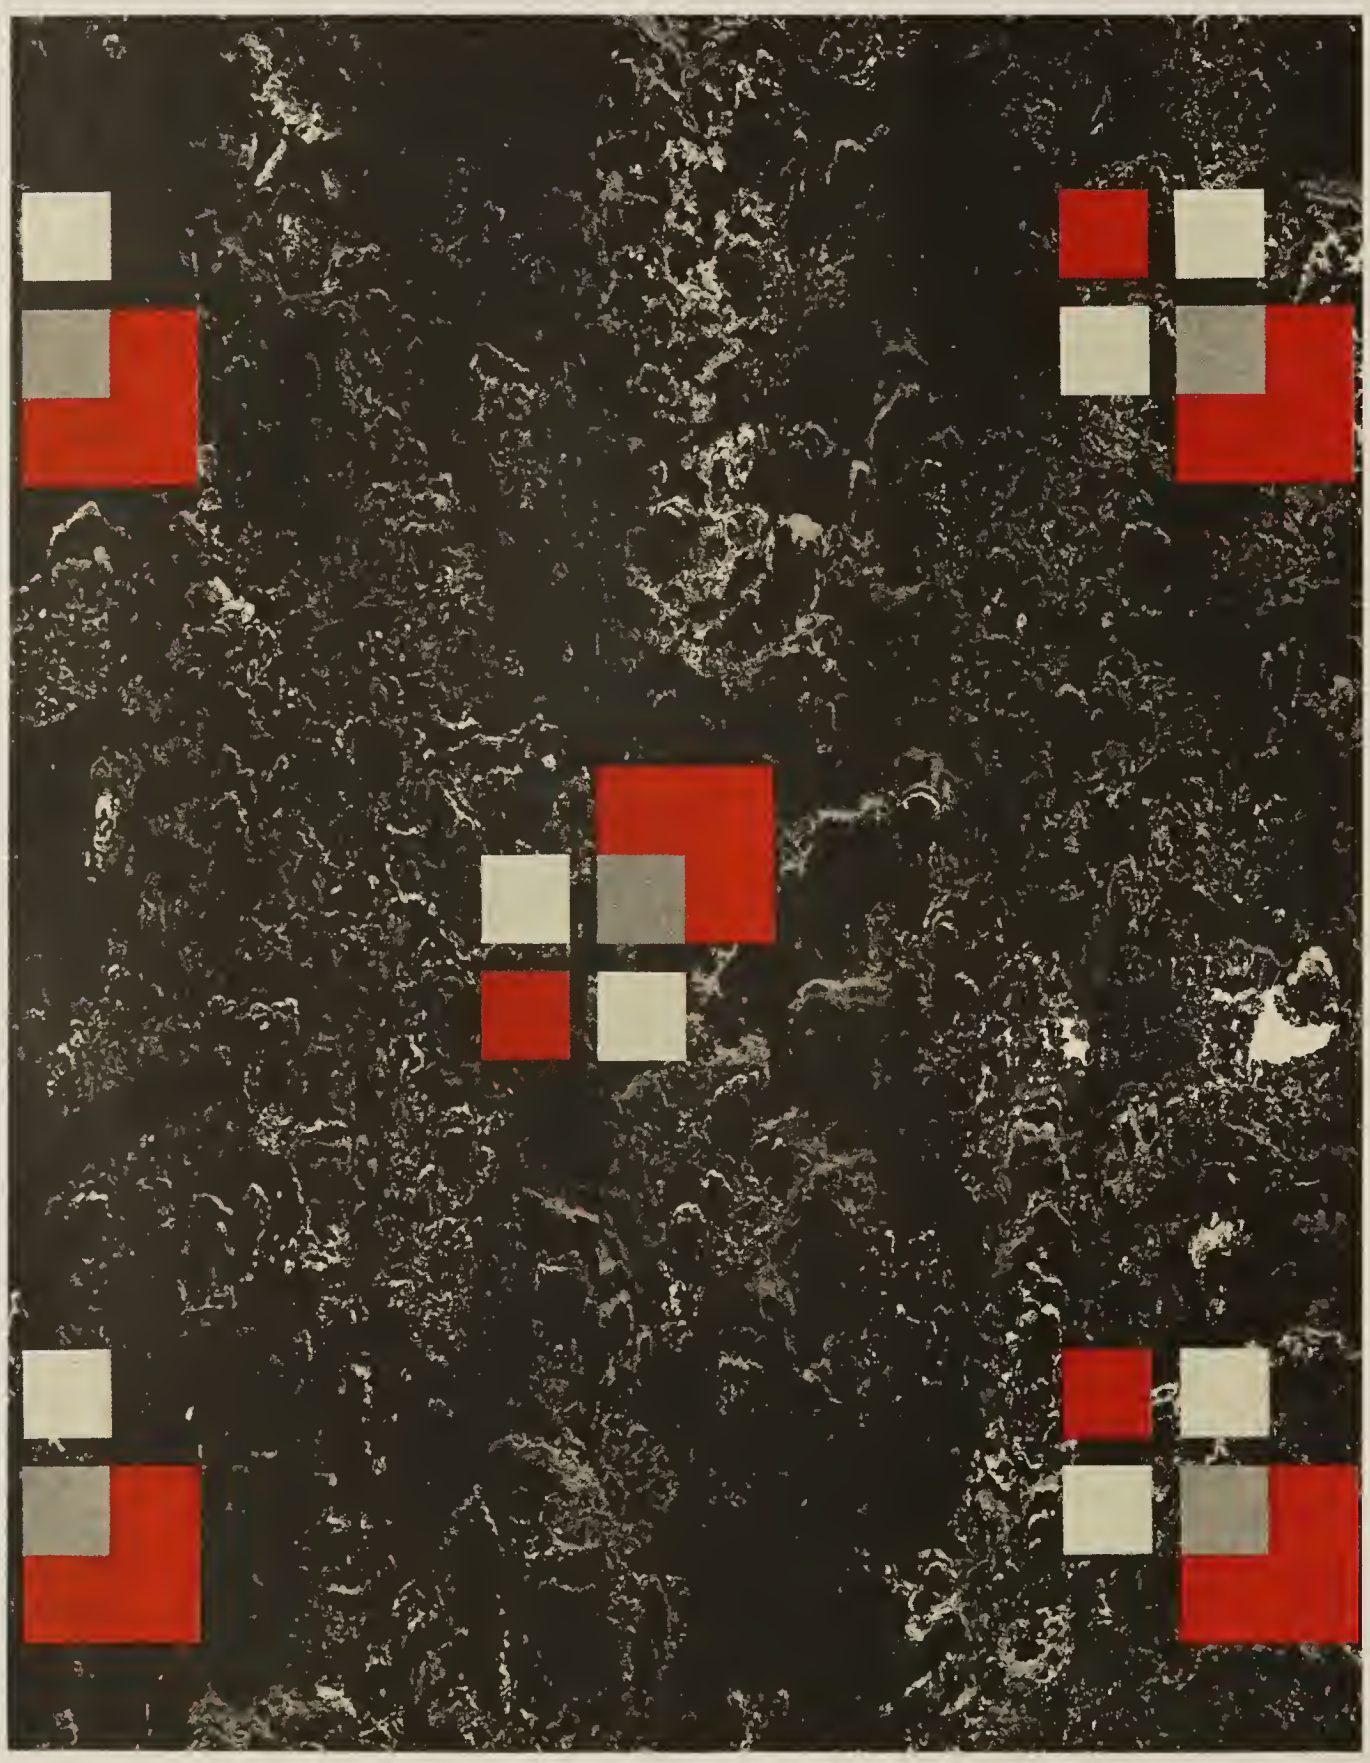

"Modena"

No. 3271—Heavy Gauge

Illustration ¼ scale.

Code: Modena

Nairn Linoleum – *Sealex Karnean*

"Lucerne"

No. 3272—Heavy Gauge

Illustration ¼ scale.

Code: Lucerne

Nairn Linoleum—*Sealex Karnean*

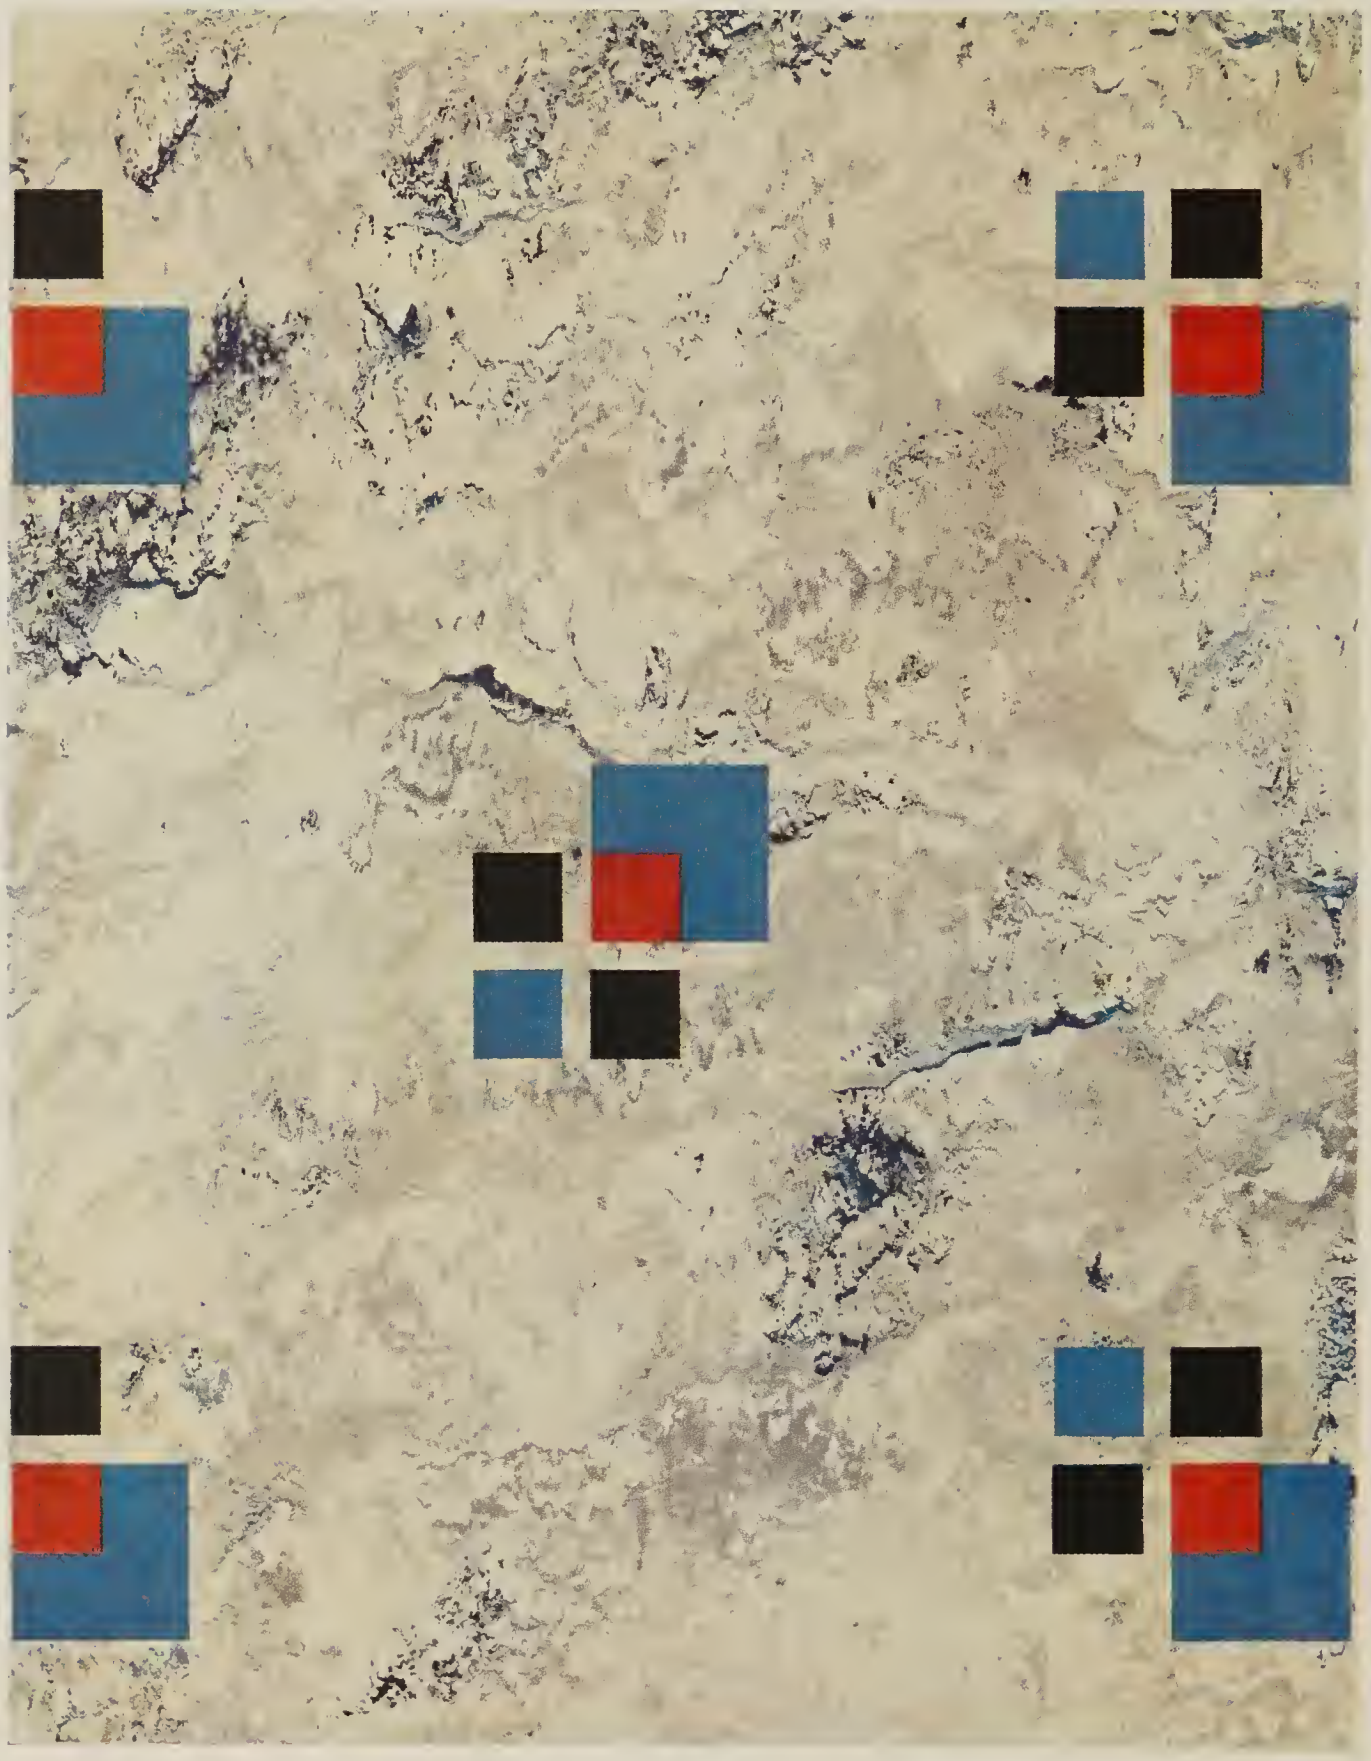

"Piedmont"

No. 3273—Heavy Gauge

Code: Piedmont

Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Ravenna"

No. 3275—Heavy Gauge

Code: Ravenna

Actual size of tiles: 9″ x 9″ Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

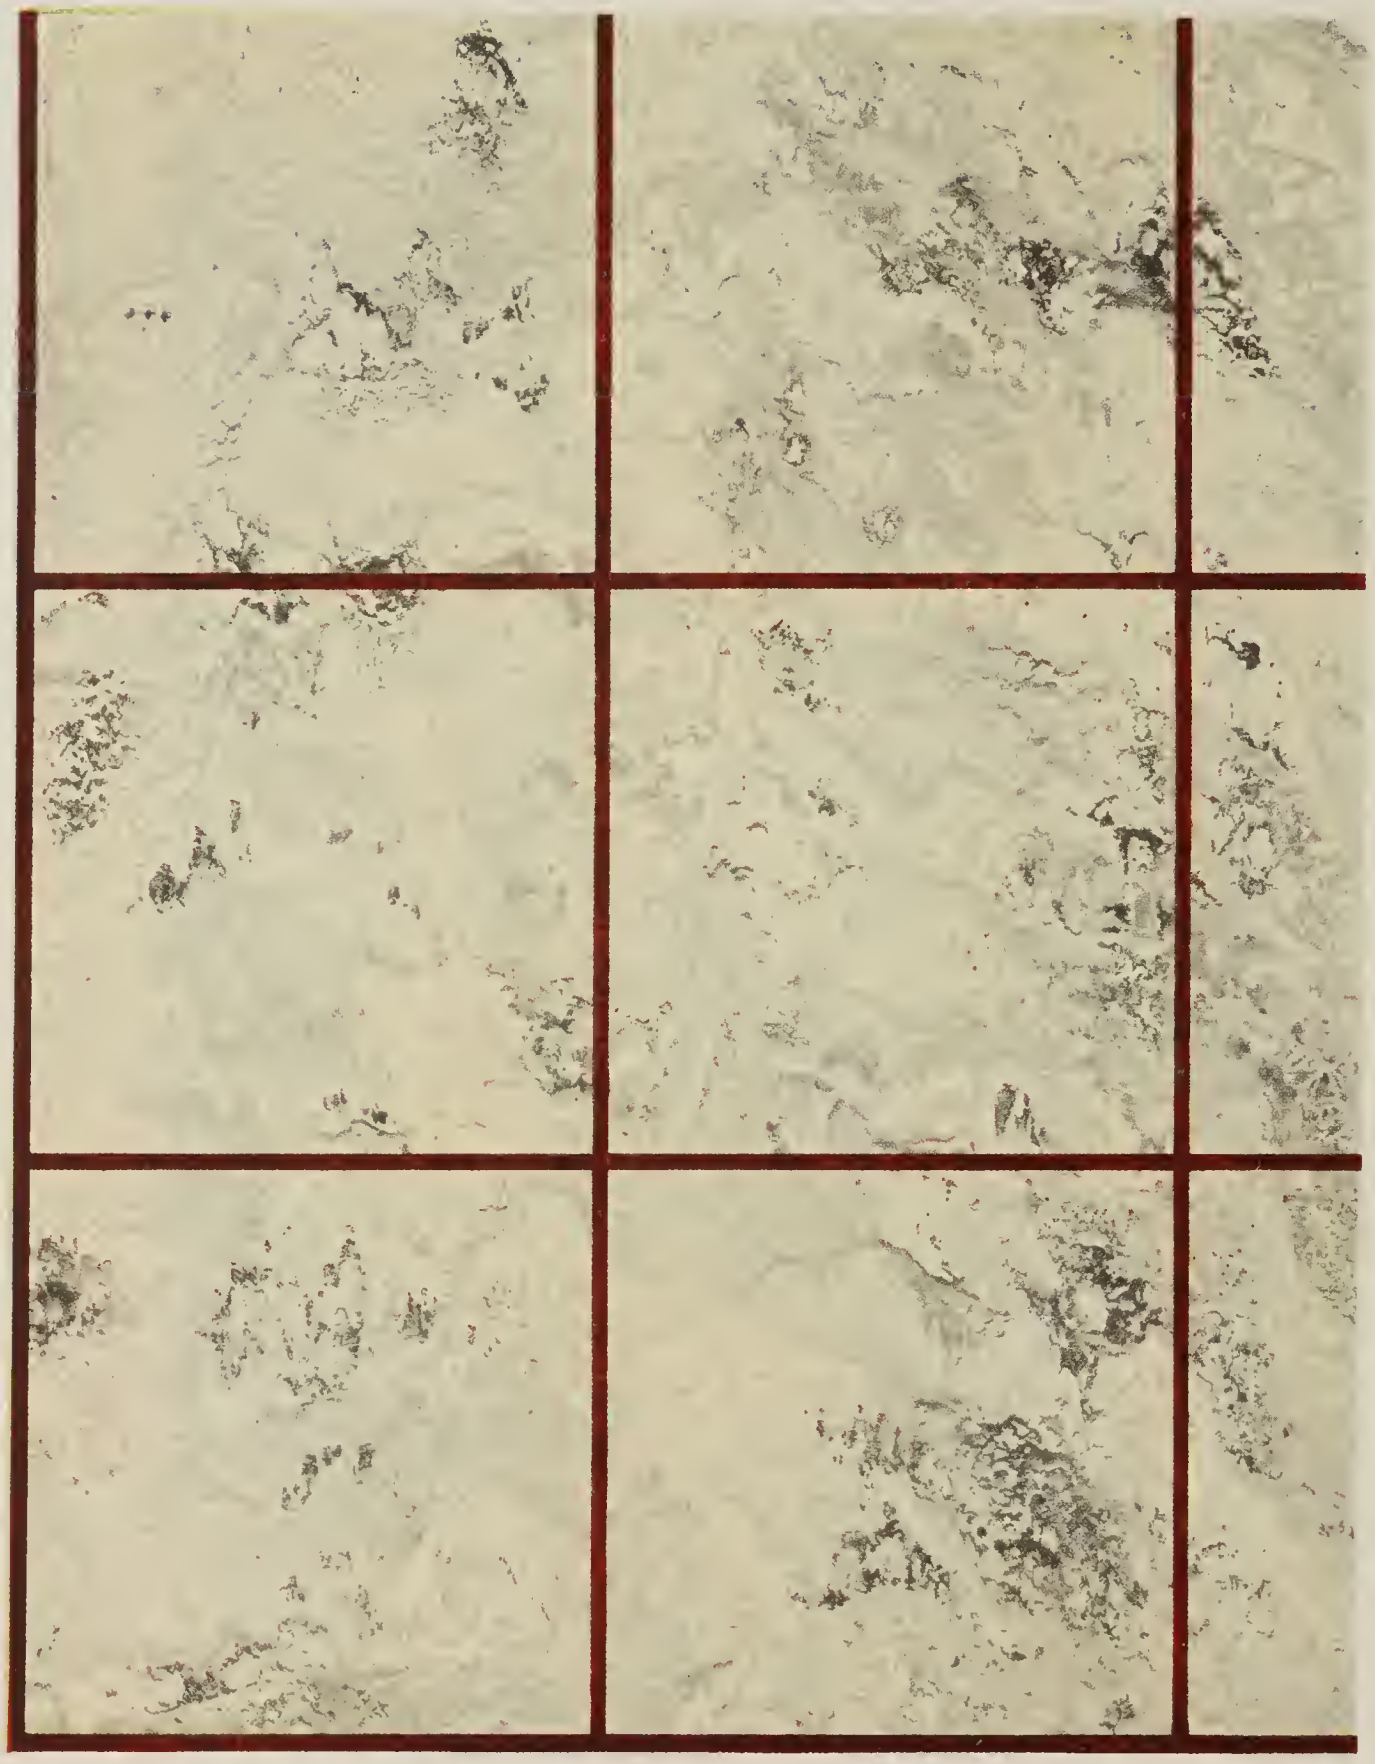

"Bayonne"

No. 3276—Heavy Gauge

Code: Bayonne

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

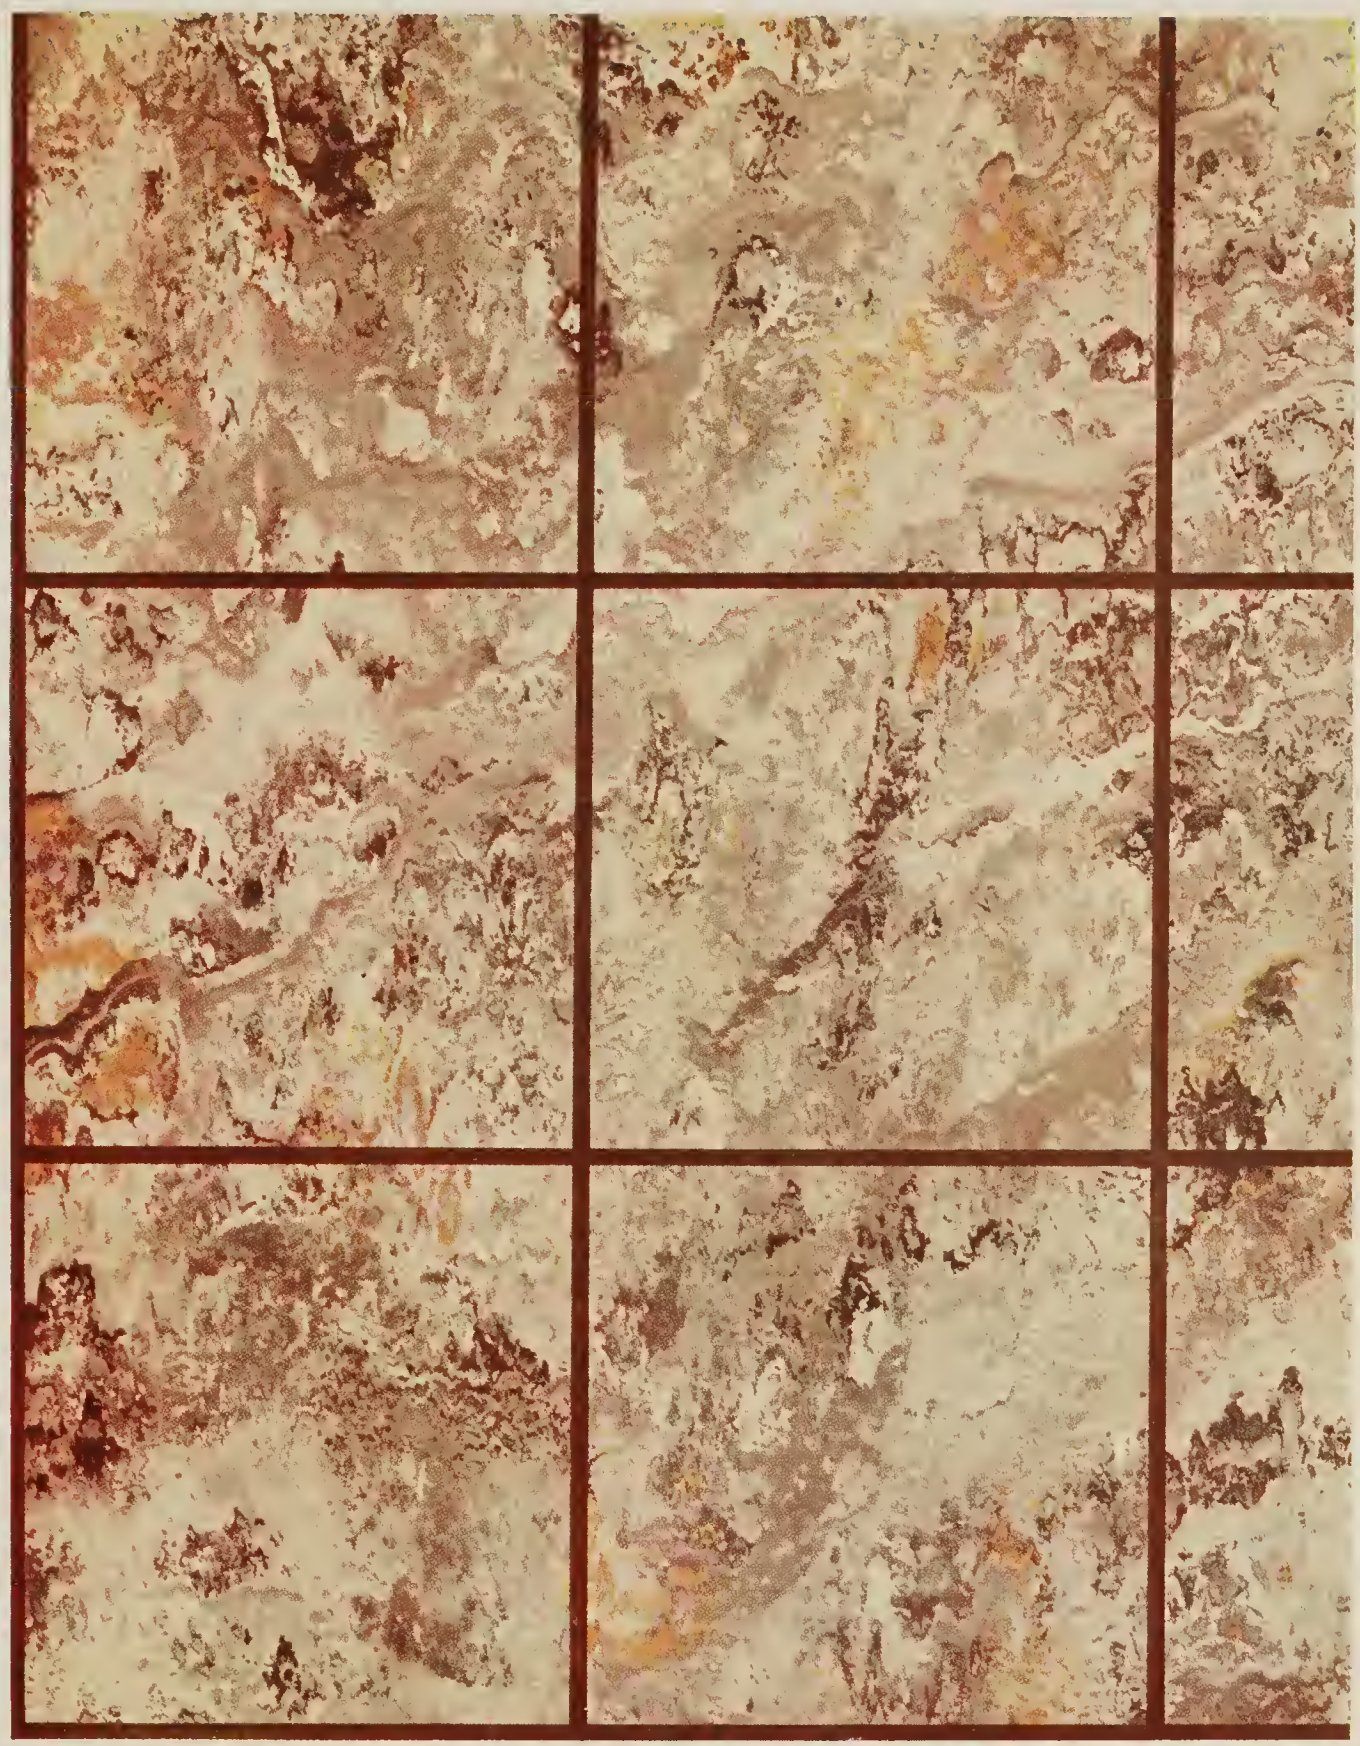

"Parma"

No. 3277—Heavy Gauge

Code: Parma

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Aragon"

No. 3280—Heavy Gauge

Code: Aragon

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Salinas"

No. 3281—Heavy Gauge

Code: Salinas

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

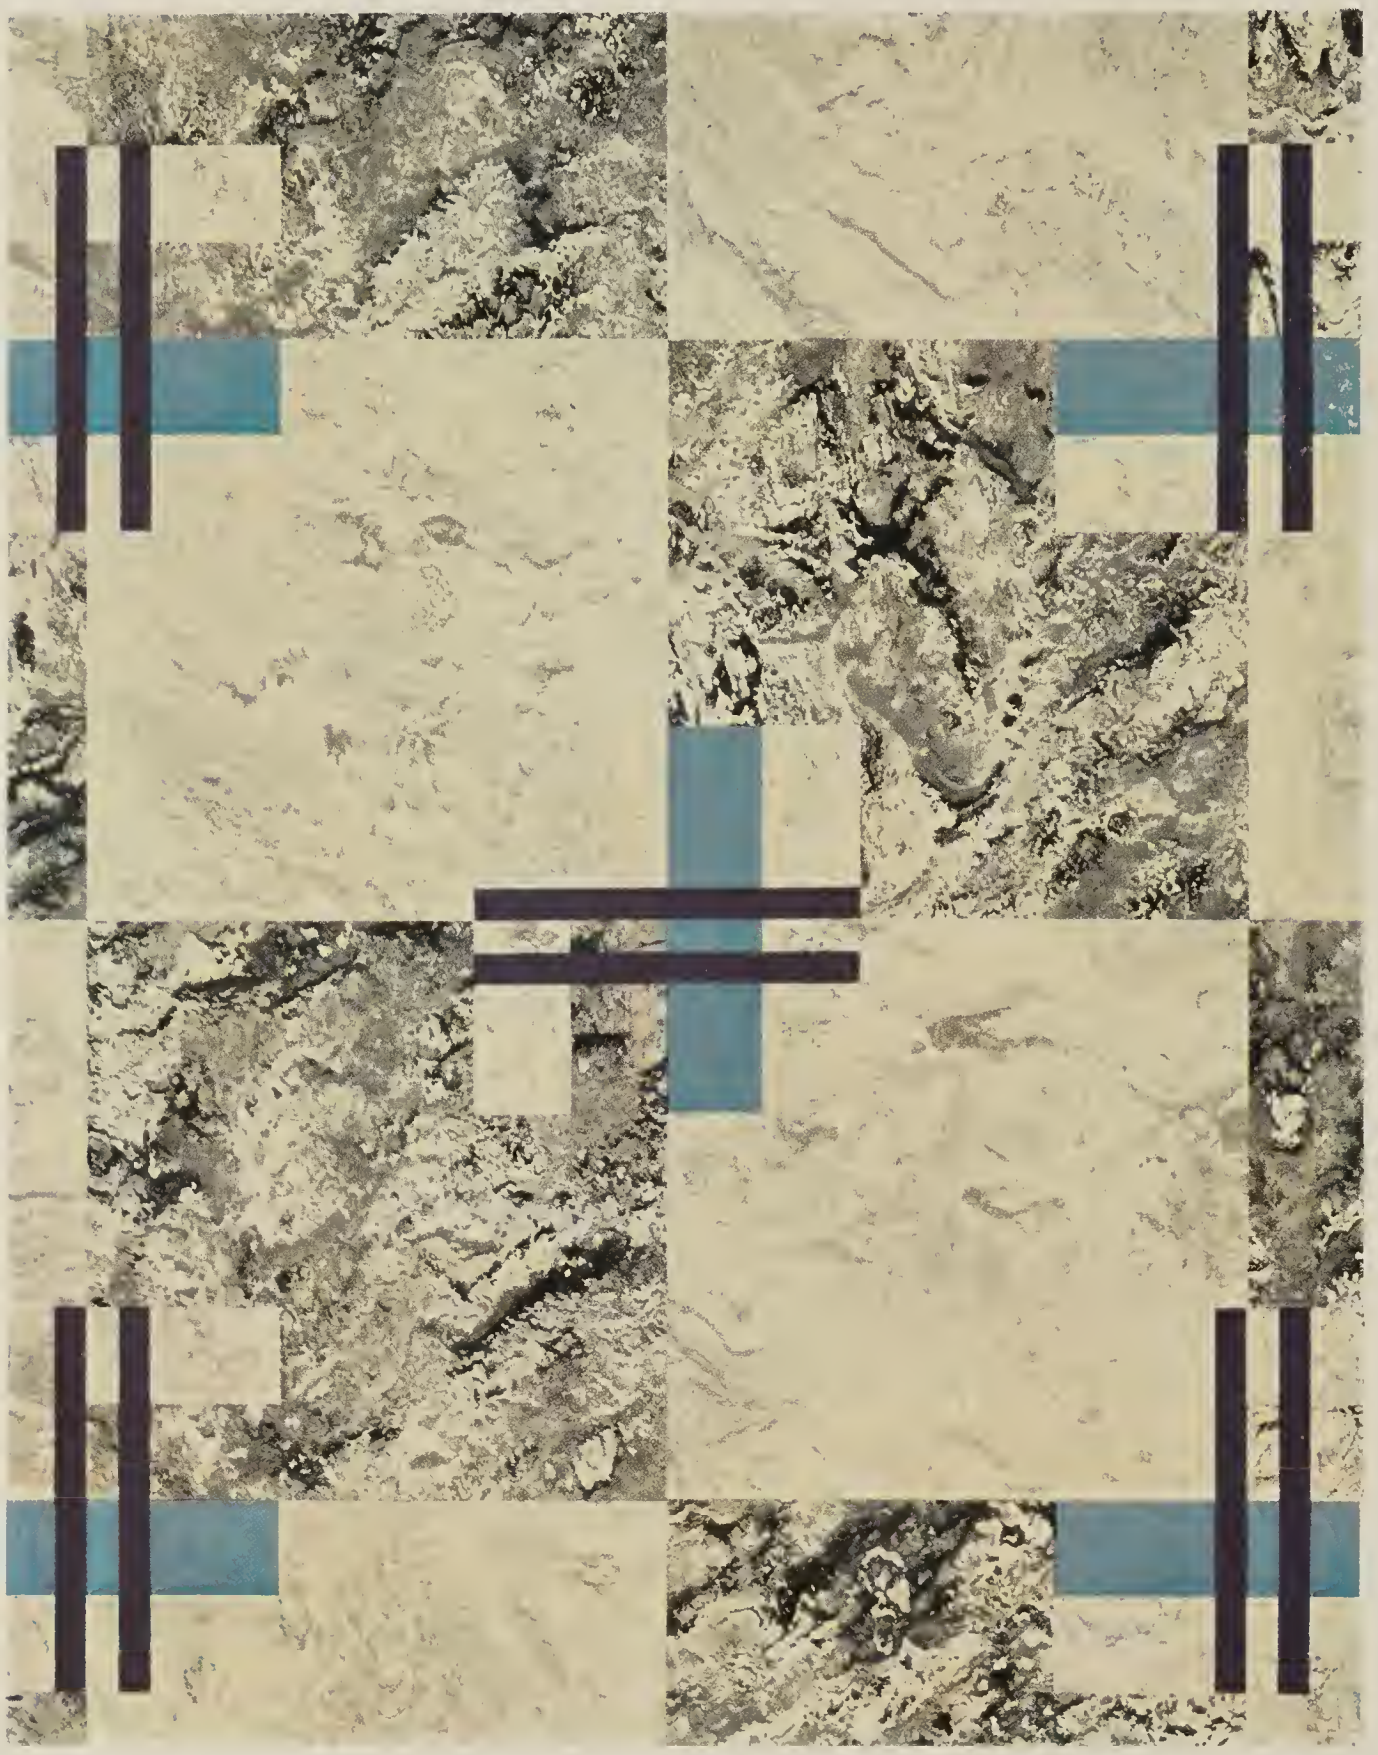

"Sedan"

No. 3282—Heavy Gauge

Code: Sedan

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

"Cremona"

No. 3283—Heavy Gauge

Code: Cremona

Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

"*Revere*"—No. 6015 **Medium Gauge** — Code: Revere

Actual width of large plank, 7¾".
Illustration ¼ scale.

"*Potomac*"—No. 6016 **Medium Gauge** — Code: Potomac

Actual width of large plank, 7¾".
Illustration ¼ scale.

MEDIUM GAUGE

Nairn Sealex Karnean Medium Gauge offers great possibilities for economical installation. This beautiful, long-wearing merchandise provides the ideal floor for apartment house lobbies, smaller club-rooms, and smart homes.

The range of designs in Nairn Sealex Karnean Medium includes an appropriate pattern for every type of decorative scheme. There are dignified tile designs—colorful, gay effects with bright accents of color. And all have the richly marbleized backgrounds which are reigning favorites today.

Actual thickness of Nairn Sealex Karnean Medium Gauge is .095 inch or 2.40 mm.

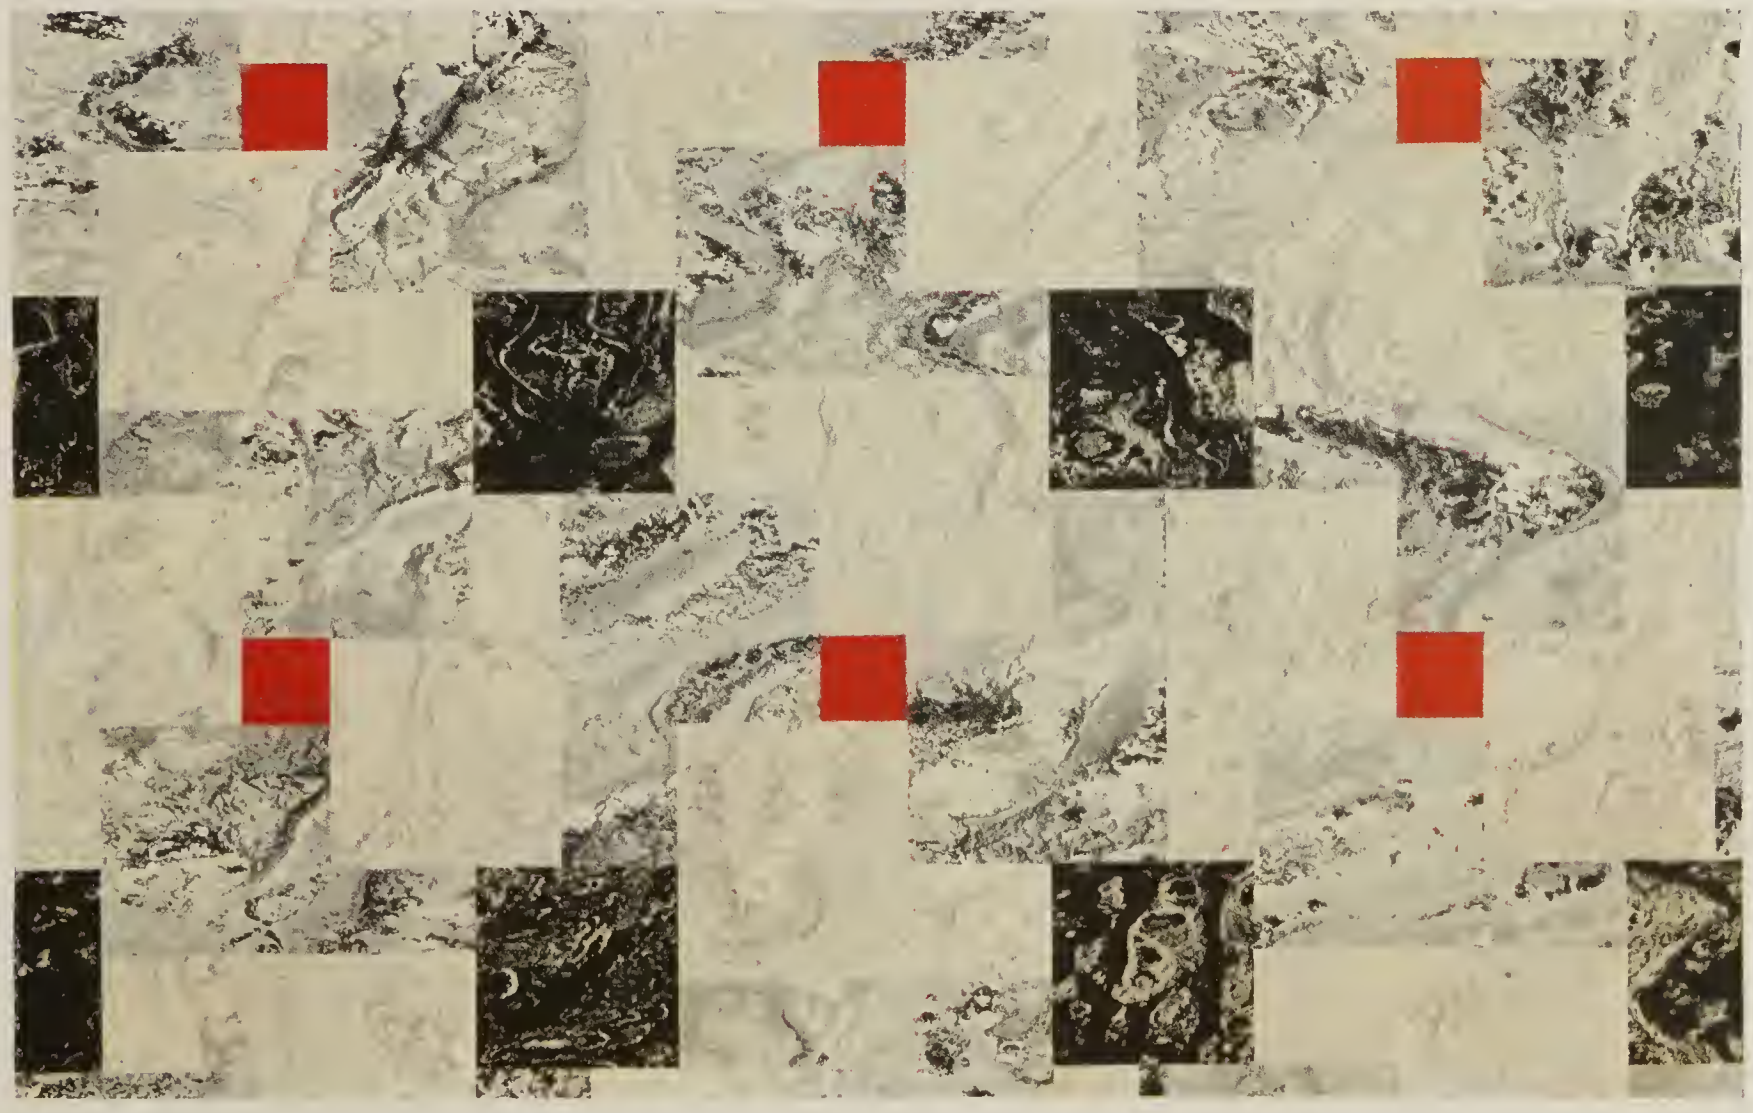

Illustration ¼ scale.

Medium Gauge — Code: Haarlem

"Haarlem"—No. 6051

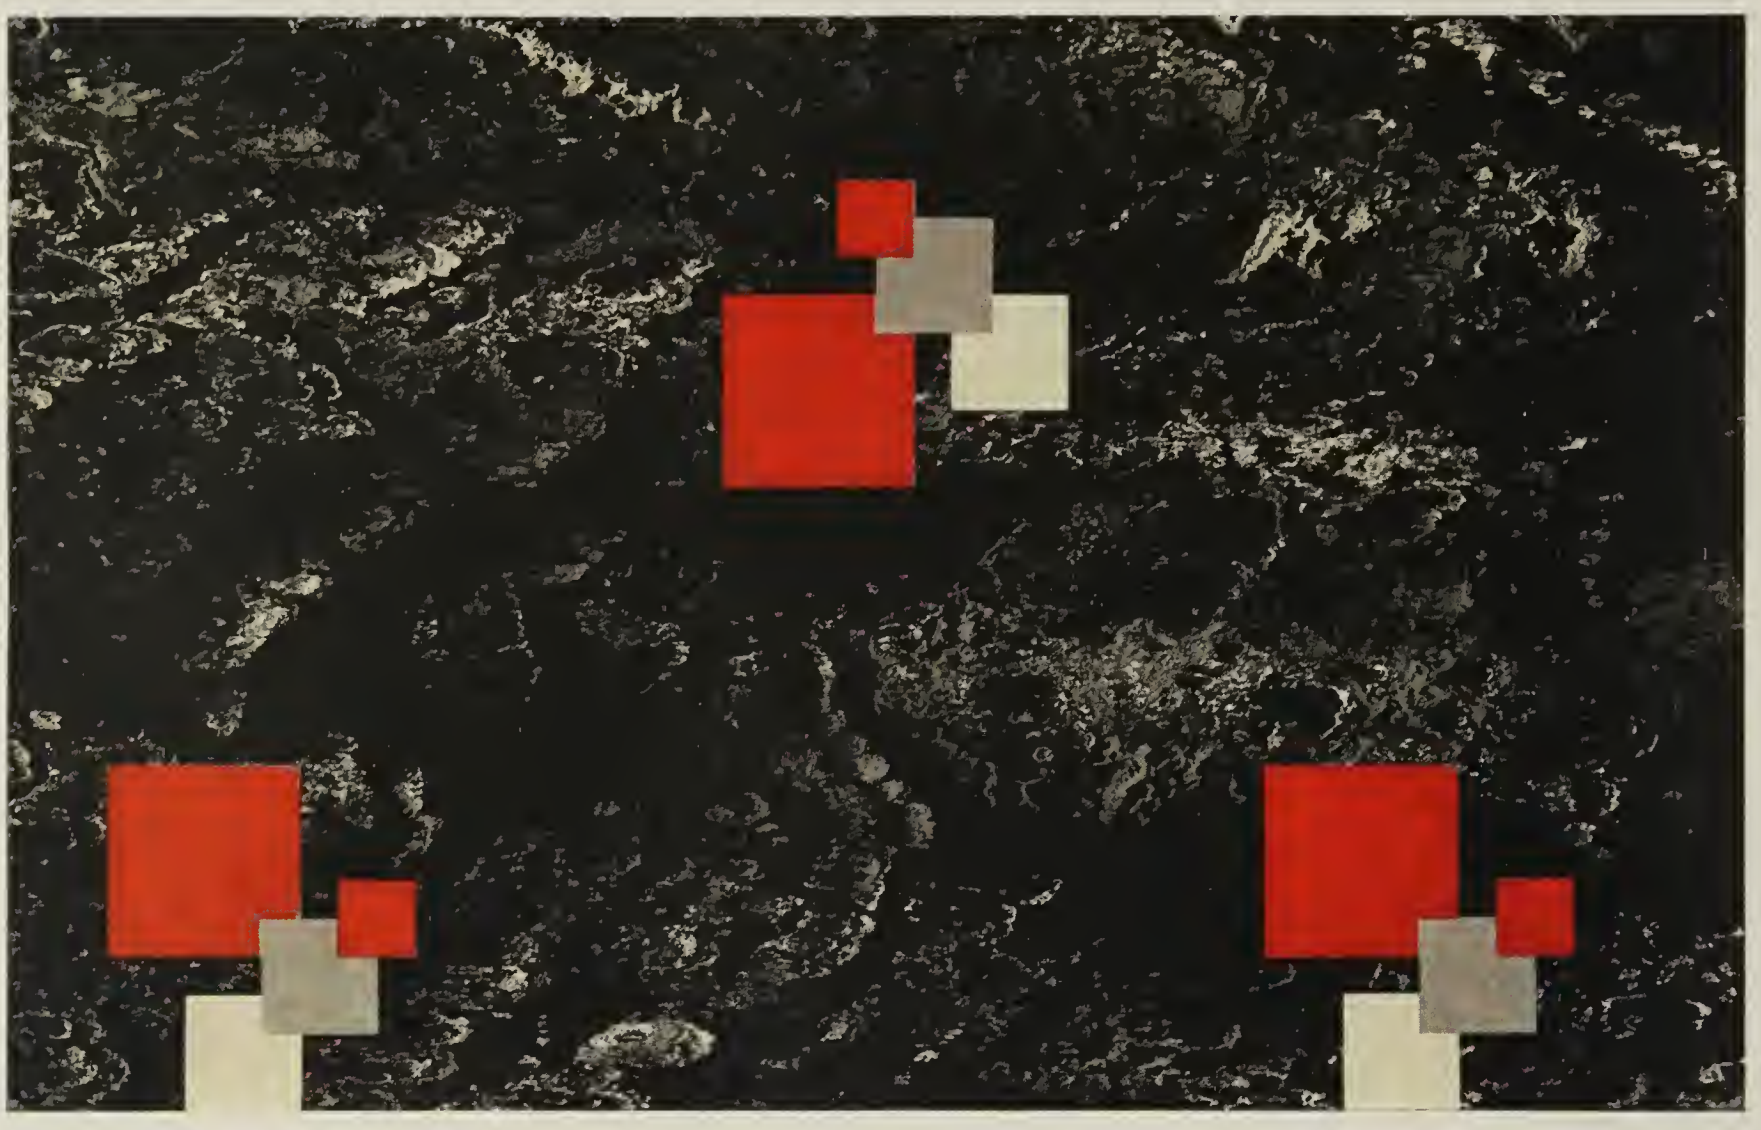

"*Ansonia*"—No. 6070 **Medium Gauge** — Code: Ansonia Illustration ¼ scale.

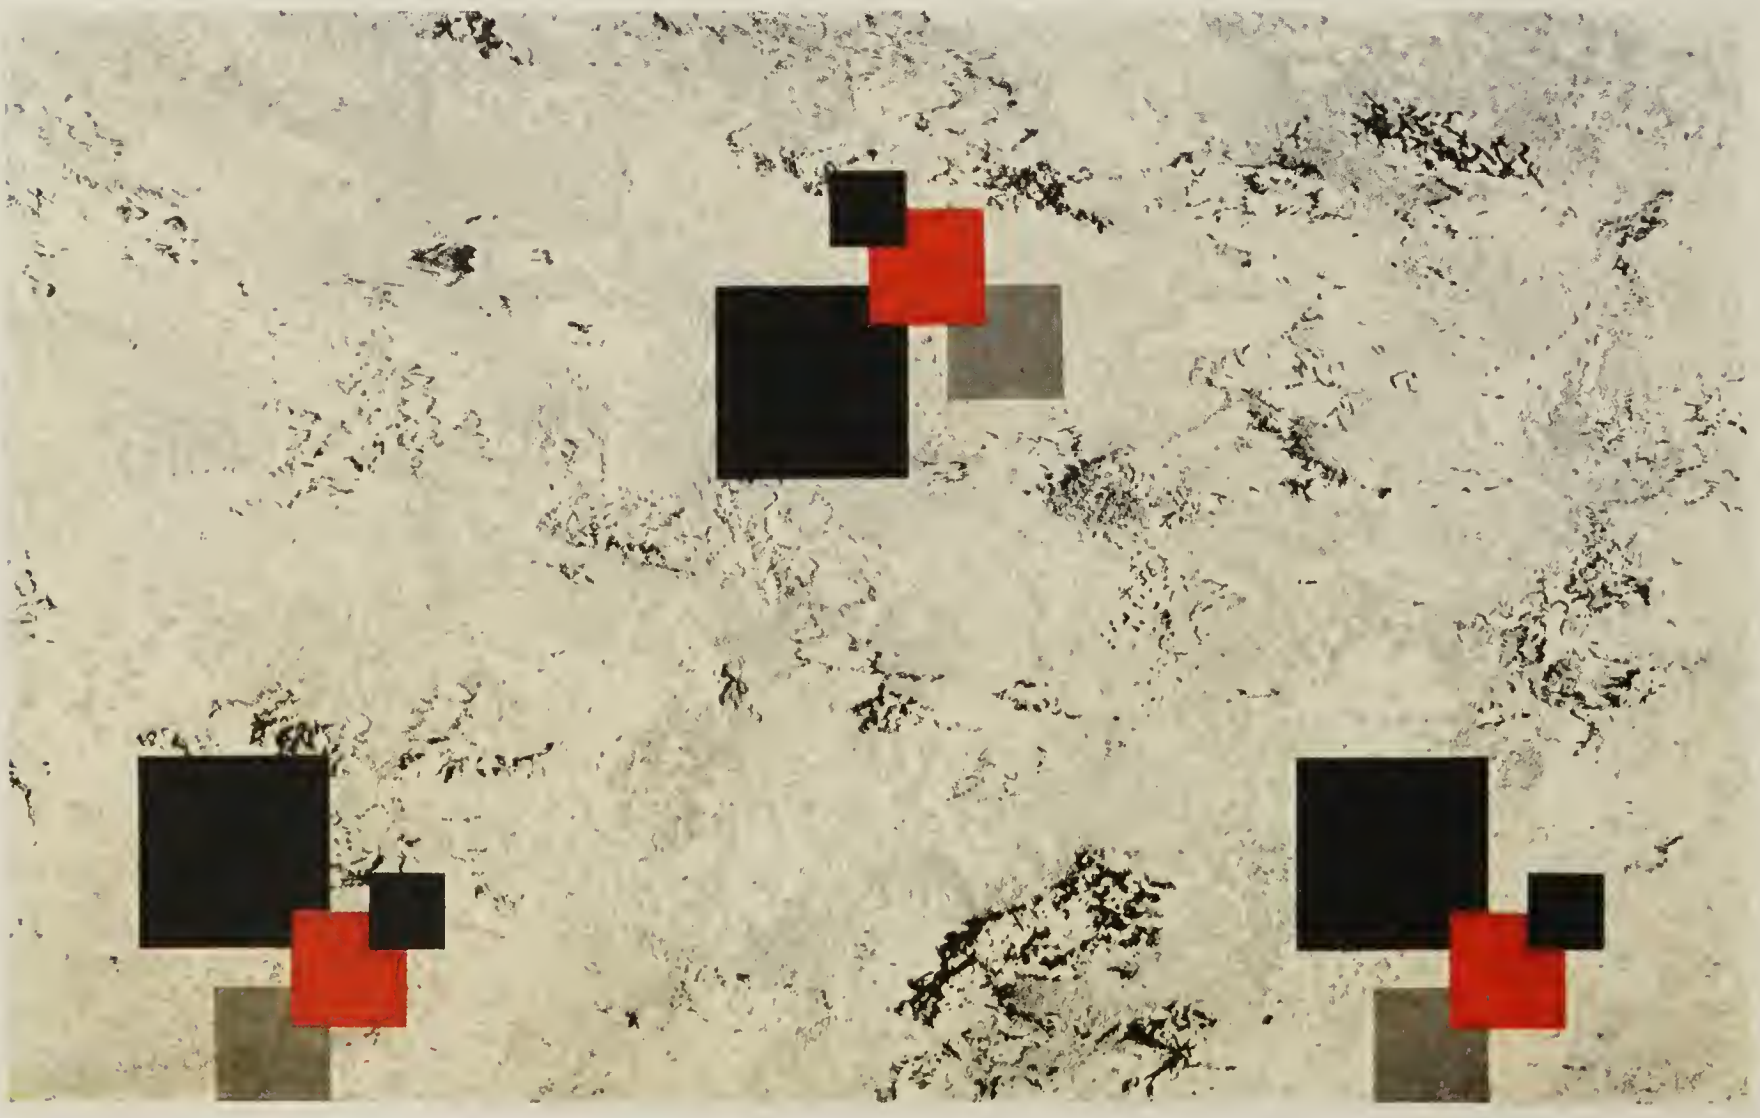

"*Astor*"—No. 6071 **Medium Gauge** — Code: Astor Illustration ¼ scale.

Nairn Linoleum – *Sealex Karnean*

Illustration ¼ scale.

Medium Gauge — Code: Barclay

"Barclay"—No. 6072

Illustration ¼ scale.

Medium Gauge — Code: Newport

"Newport"—No. 6073

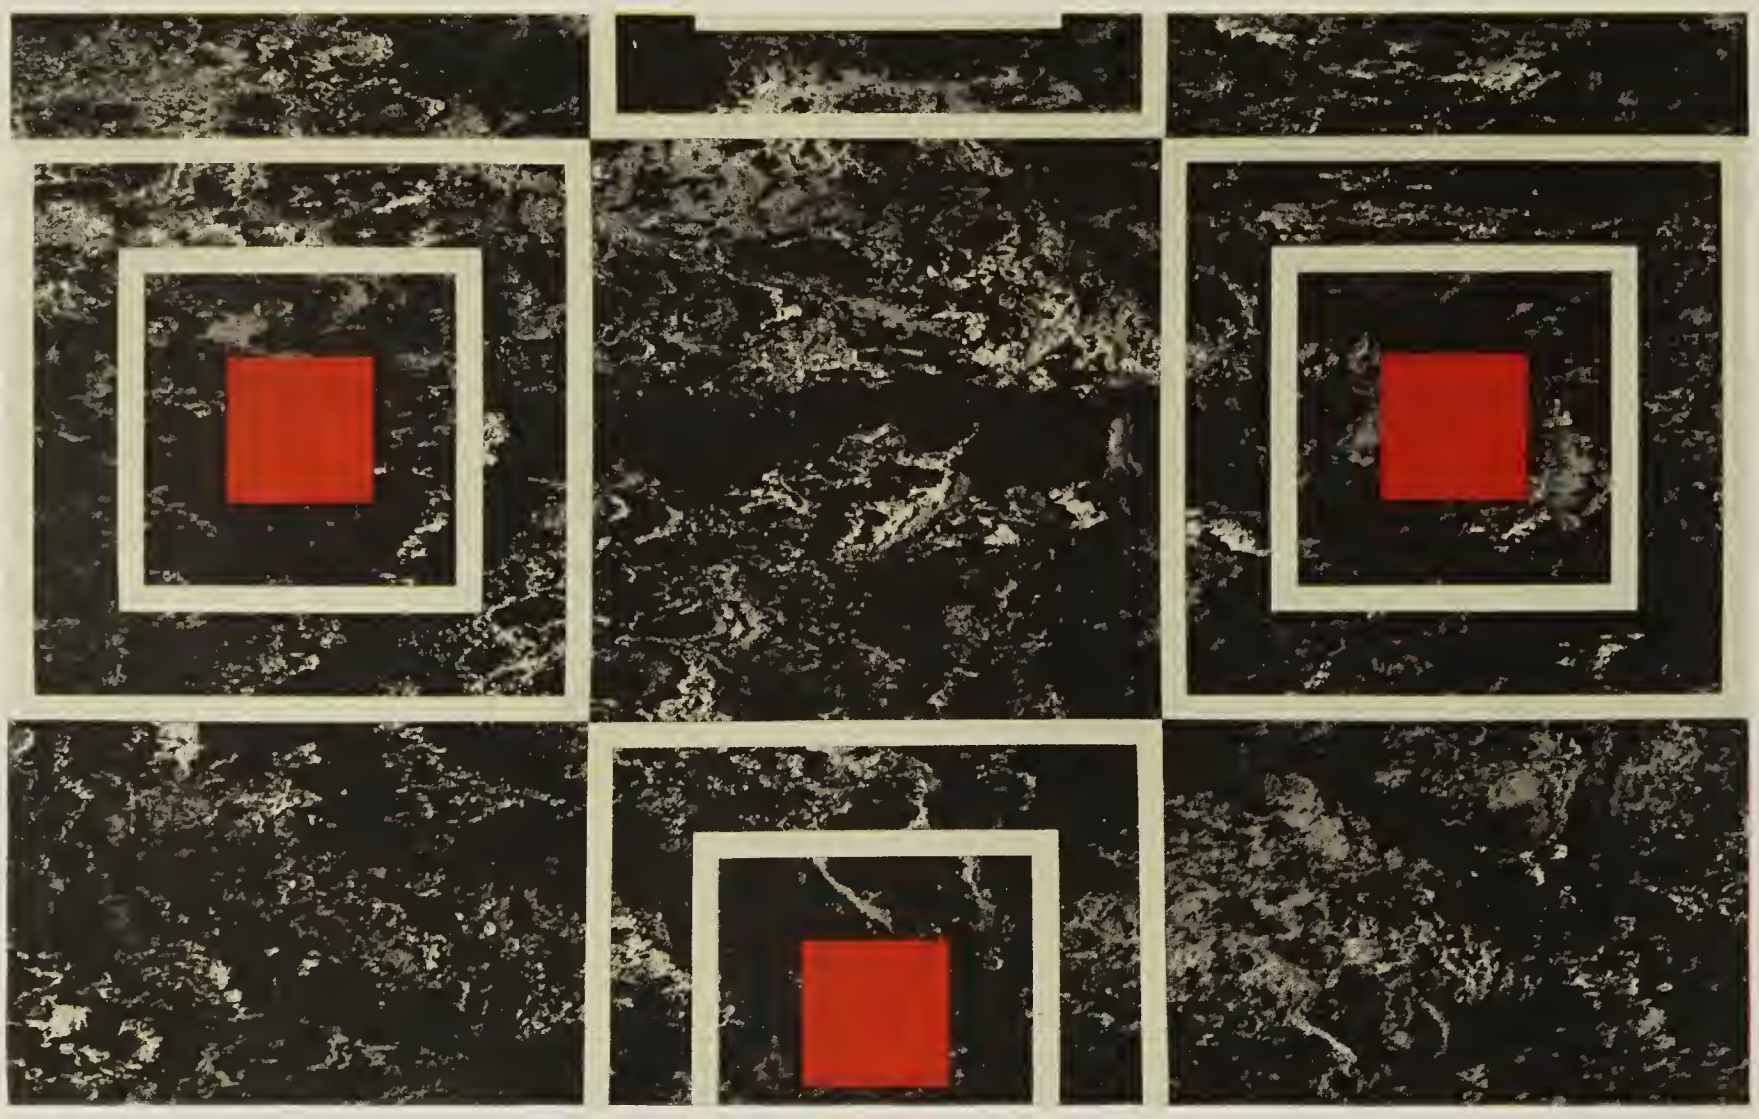

"Beacon"—No. 6075 **Medium Gauge** — Code: Beacon Illustration ¼ scale.

"Bellmore"—No. 6077 **Medium Gauge** — Code: Bellmore Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex*

ONLY FOUR YEARS OLD—AND STEALING AMERICA'S FLOOR SHOW!

Another patented, exclusive Congoleum-Nairn development leads the way. Nairn Adhesive Sealex Linoleum has proved itself a dramatic double-feature success!

First: Style-right designs and rich colors are rapidly gaining for it wider recognition as America's Beauty Queen of linoleums. Architects, decorators, designers, everyone who sees Nairn Adhesive Sealex Linoleum, immediately acclaims its patterns the most refreshing design and color achievements in years.

Second: The exclusive new adhesive back, a sensational new invention, gives permanent *protection* to that beauty—because Nairn Adhesive Sealex Linoleum can be laid direct to any smooth, dry floor above grade. This direct installation gives the strongest, longest-wearing floor of any linoleum on the market. It provides a *positive*, *permanent* bond that defeats all efforts of expanding and contracting floor boards to start ugly buckles and bulges where wear begins.

And here's another feature: The entire line is color correlated with Sealex Insets, Feature Strips, and Borders, assuring perfect color harmony or contrast when used in "Personal-ized Floors."

Adhesive Linoleum is available in Standard Gauge Nairn Linoleums and Nairn Treadlite Linoleum. Protected by Patent No. 1,970,503.

INSTRUCTIONS FOR LAYING NAIRN ADHESIVE SEALEX AND NAIRN TREADLITE LINOLEUMS

These modern floor-coverings have a new and specially prepared adhesive on the back. Applied at the factory under tremendous pressure, this new adhesive is distributed with perfect uniformity. And it's the strongest adhesive ever made for linoleum. That's important—for no linoleum floor can be any stronger than the adhesive which is used.

We recommend the application of Nairn Adhesive Sealex Linoleum and Nairn Treadlite Linoleum directly to smooth, dry wood or concrete floors (above grade) without the use of lining felt.

Installed according to the following specifications, every square inch of Nairn Adhesive Sealex Linoleum and Nairn Treadlite Linoleum grips the floor like a vise—insuring a *permanent* job!

DIRECTIONS FOR LAYING

1. UNROLLING—No linoleum should be unrolled when cold. Before unrolling, it should be kept at a minimum room temperature of 65° F. for at least twelve hours.

2. OVER WOOD FLOORS—Since no linoleum floor can be smoother than the underfloor, all loose floor boards should be nailed tightly and all uneven joints planed or sanded smooth. Carefully remove baseboard moulding if any. Replace moulding after laying the linoleum. Wherever possible, lay Nairn Adhesive Sealex Linoleum and Nairn Treadlite Linoleum crosswise to the floor boards.

CAUTION: NO LINOLEUM ADHESIVE WILL STICK TO WAXED OR OILY FLOORS. REMOVE ALL WAX WITH TURPENTINE AND WASH FLOOR CLEAN USING STRONG CAUSTIC. THEN RINSE THOROUGHLY WITH CLEAR WATER AND ALLOW TO DRY. OILY FLOORS MUST BE SANDED.

3. OVER CONCRETE FLOORS — (above grade only)—It is important that these floors be dry, smooth and free from foreign matter. Fill all cracks and breaks with plaster of Paris.

4. CUTTING AND FITTING—Cut the first width to fit from wall to wall and trim closely to fit baseboards at end and side walls. Be sure that all dust and trimmings are swept up before laying the linoleum in its final position.

5. ACTIVATING AND INSTALLING—Turn half of fitted width back on itself and activate adhesive on the back. To do this, dip a soft bristle brush (such as that illustrated) into a pail of water (preferably warm) and apply water freely over the exposed back. In 2 to 3 minutes the adhesive will turn lighter in color. Keep brush thoroughly wet and with light sweeping strokes, distribute water uniformly and transform the adhesive to a creamy consistency over entire area. See Fig. 1.

Now turn the activated half of the sheet back into place on the floor and press it down all over with foot pressure, then turn back the other half of the sheet, activate and apply to the floor in the same manner.

6. MATCHING AND CUTTING SEAMS — Tight and properly matched seams add greatly to the attractive appearance of the finished floor. After cementing the first width into place, fit adjoining width so that it slightly overlaps and the pattern matches. Using the edge of the top sheet as a guide, cut through the bottom sheet and remove the trimming. Activate the back as with first sheet and press firmly into place. See Fig. 2.

7. CLEANING AND WAXING—Immediately after completion of the laying, clean the surface of the linoleum with a damp cloth and apply a coat of NAIRN SELF-POLISHING WAX. In a short time this wax dries to a fine lustrous finish. The floor is then immediately ready for use.

Figure 1: (Left)
Activating the adhesive. (See Paragraph 5 above.)

Figure 2: (Right)
Trimming the seam to assure a tight and pattern-matched joint. (See Paragraph 6 above.)

Nairn Linoleum – *Adhesive Sealex Karnean*

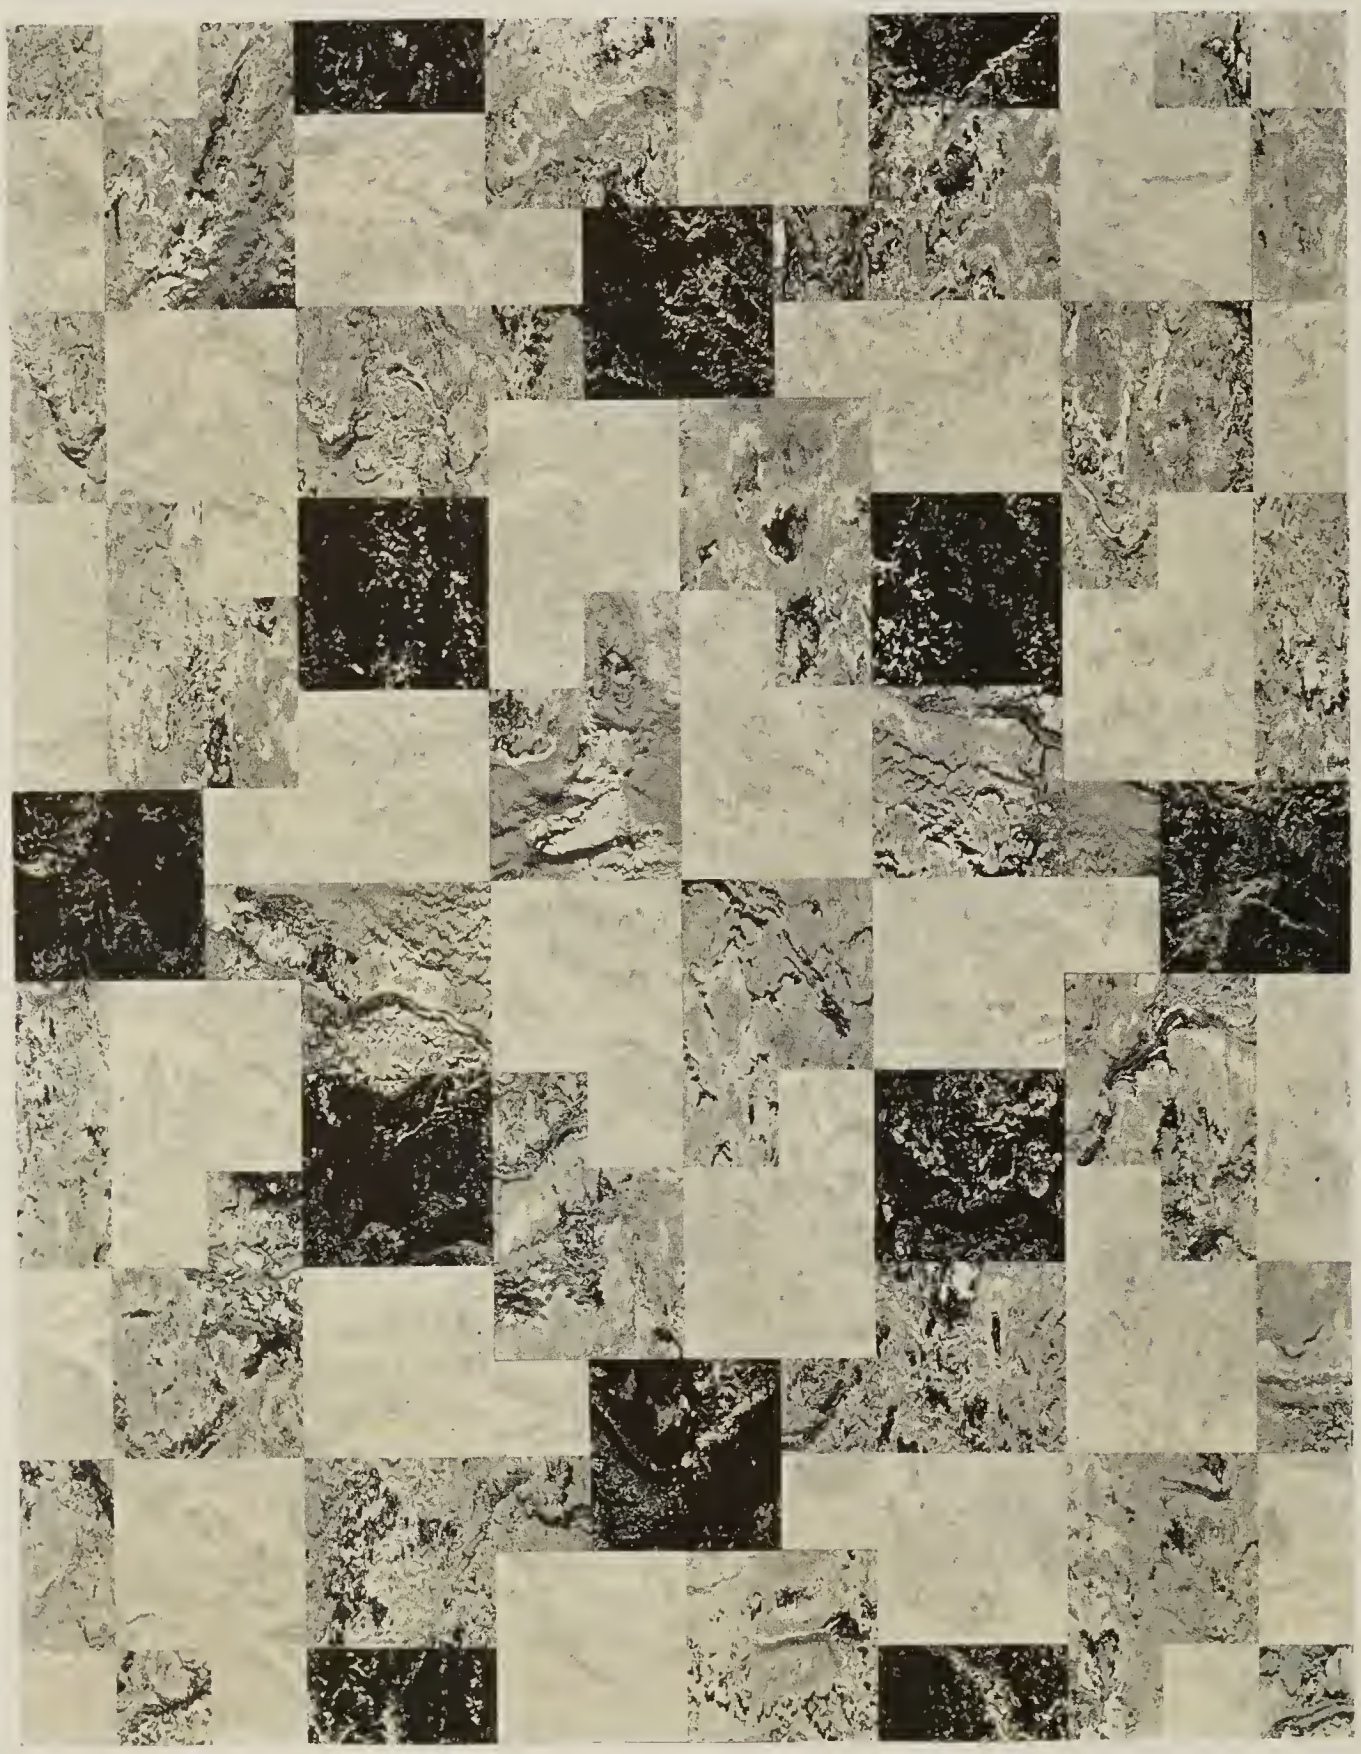

"Palermo"

No. A7432—Standard Gauge, Adhesive Code: Adpalermo
No. 7432—Standard Gauge, Without Adhesive Code: Paler

Actual size of square tiles: 3″ x 3″. Illustration $^1/_4$ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

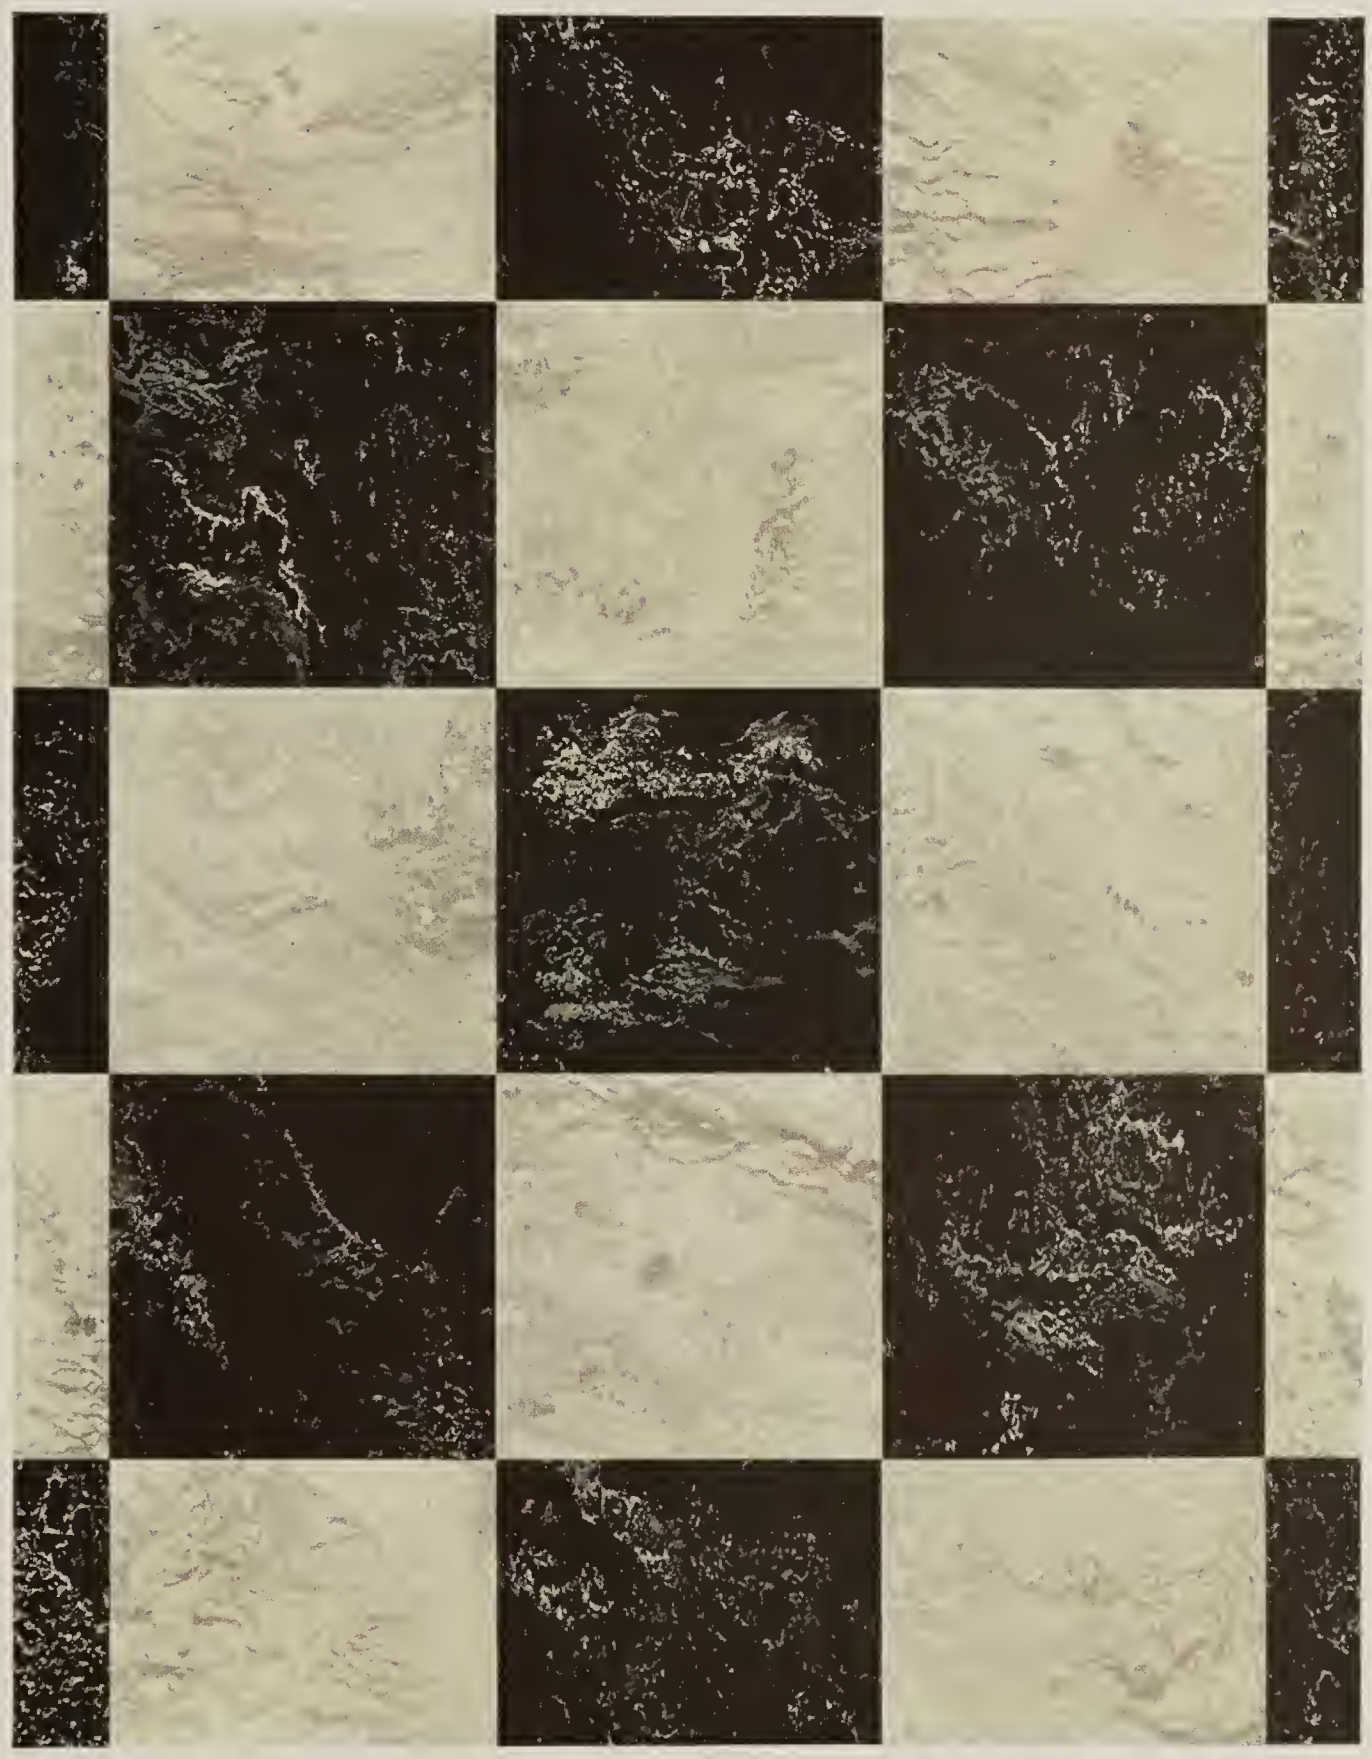

"Roman"

No. A7460—Standard Gauge, Adhesive — Code: Adroman
No. 7460—Standard Gauge, Without Adhesive — Code: Roman

Actual size of tiles: 6″ x 6″. Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

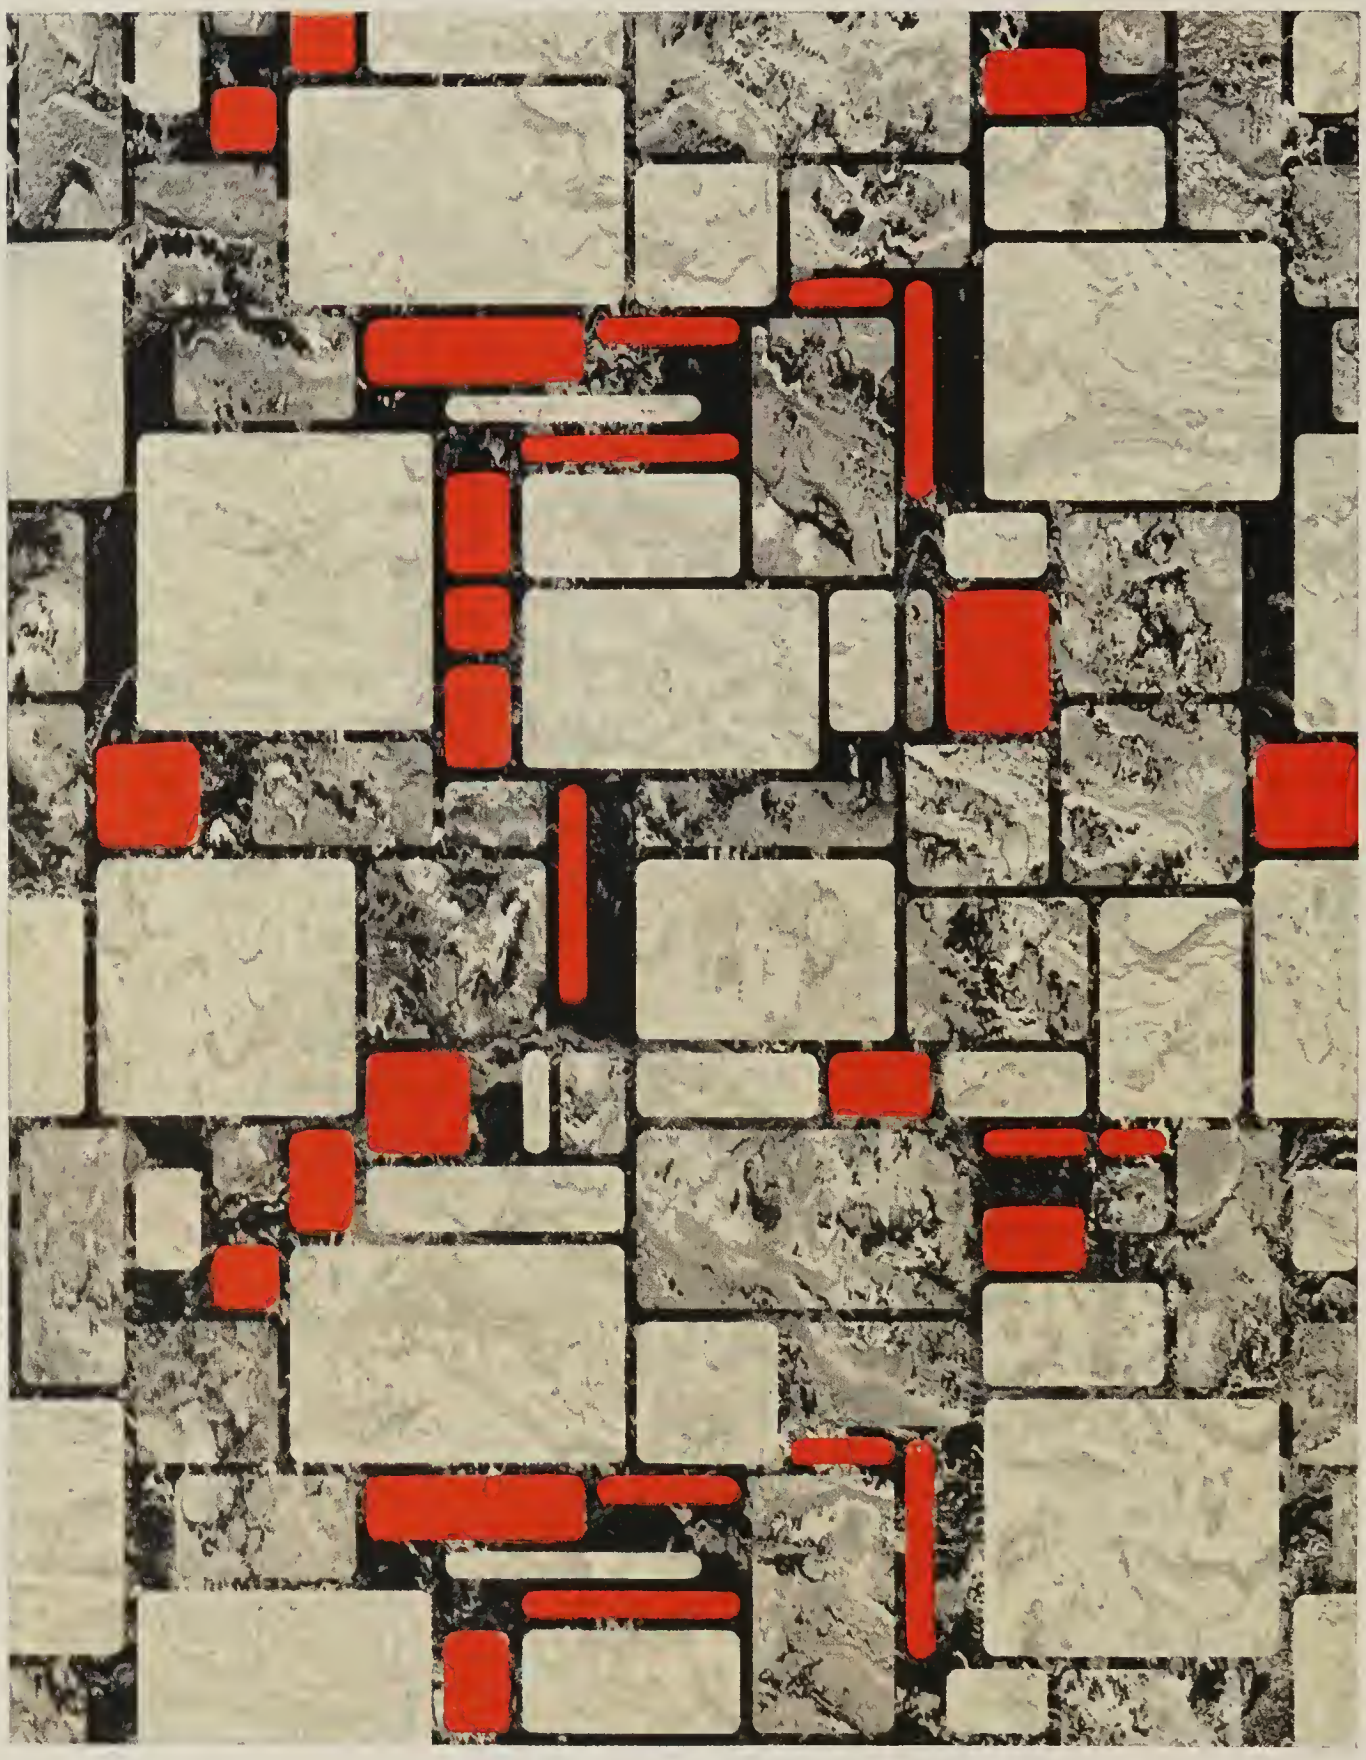

"Toreador"

No. A7470—Standard Gauge, Adhesive — Code: Adtoreador
No. 7470—Standard Gauge, Without Adhesive — Code: Toreador

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

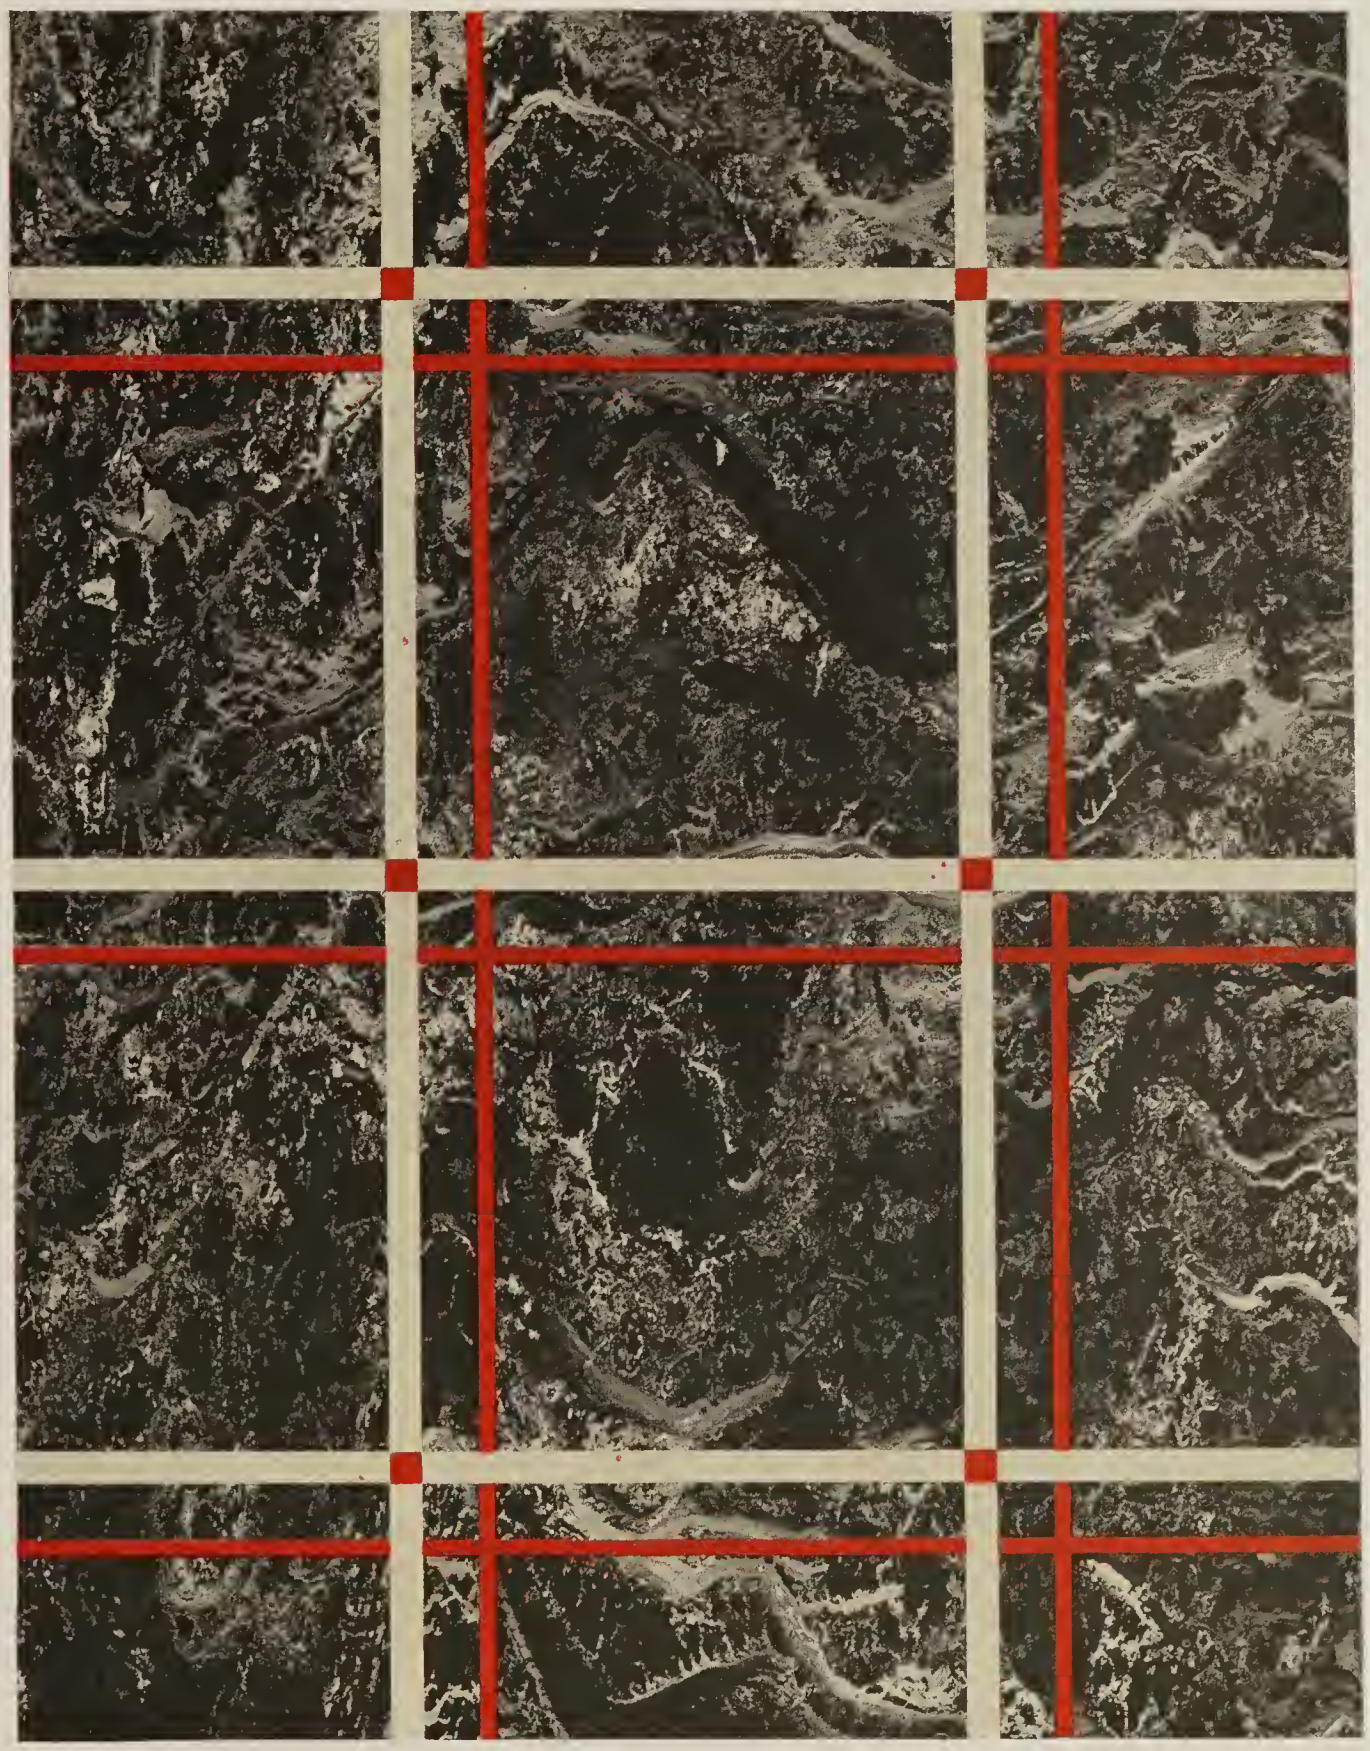

"Blackburn"

No. A7488—Standard Gauge, Adhesive Code: Adblackburn
No. 7488—Standard Gauge, Without Adhesive Code: Blackburn

Actual size of plaids: 9″ x 9″. Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

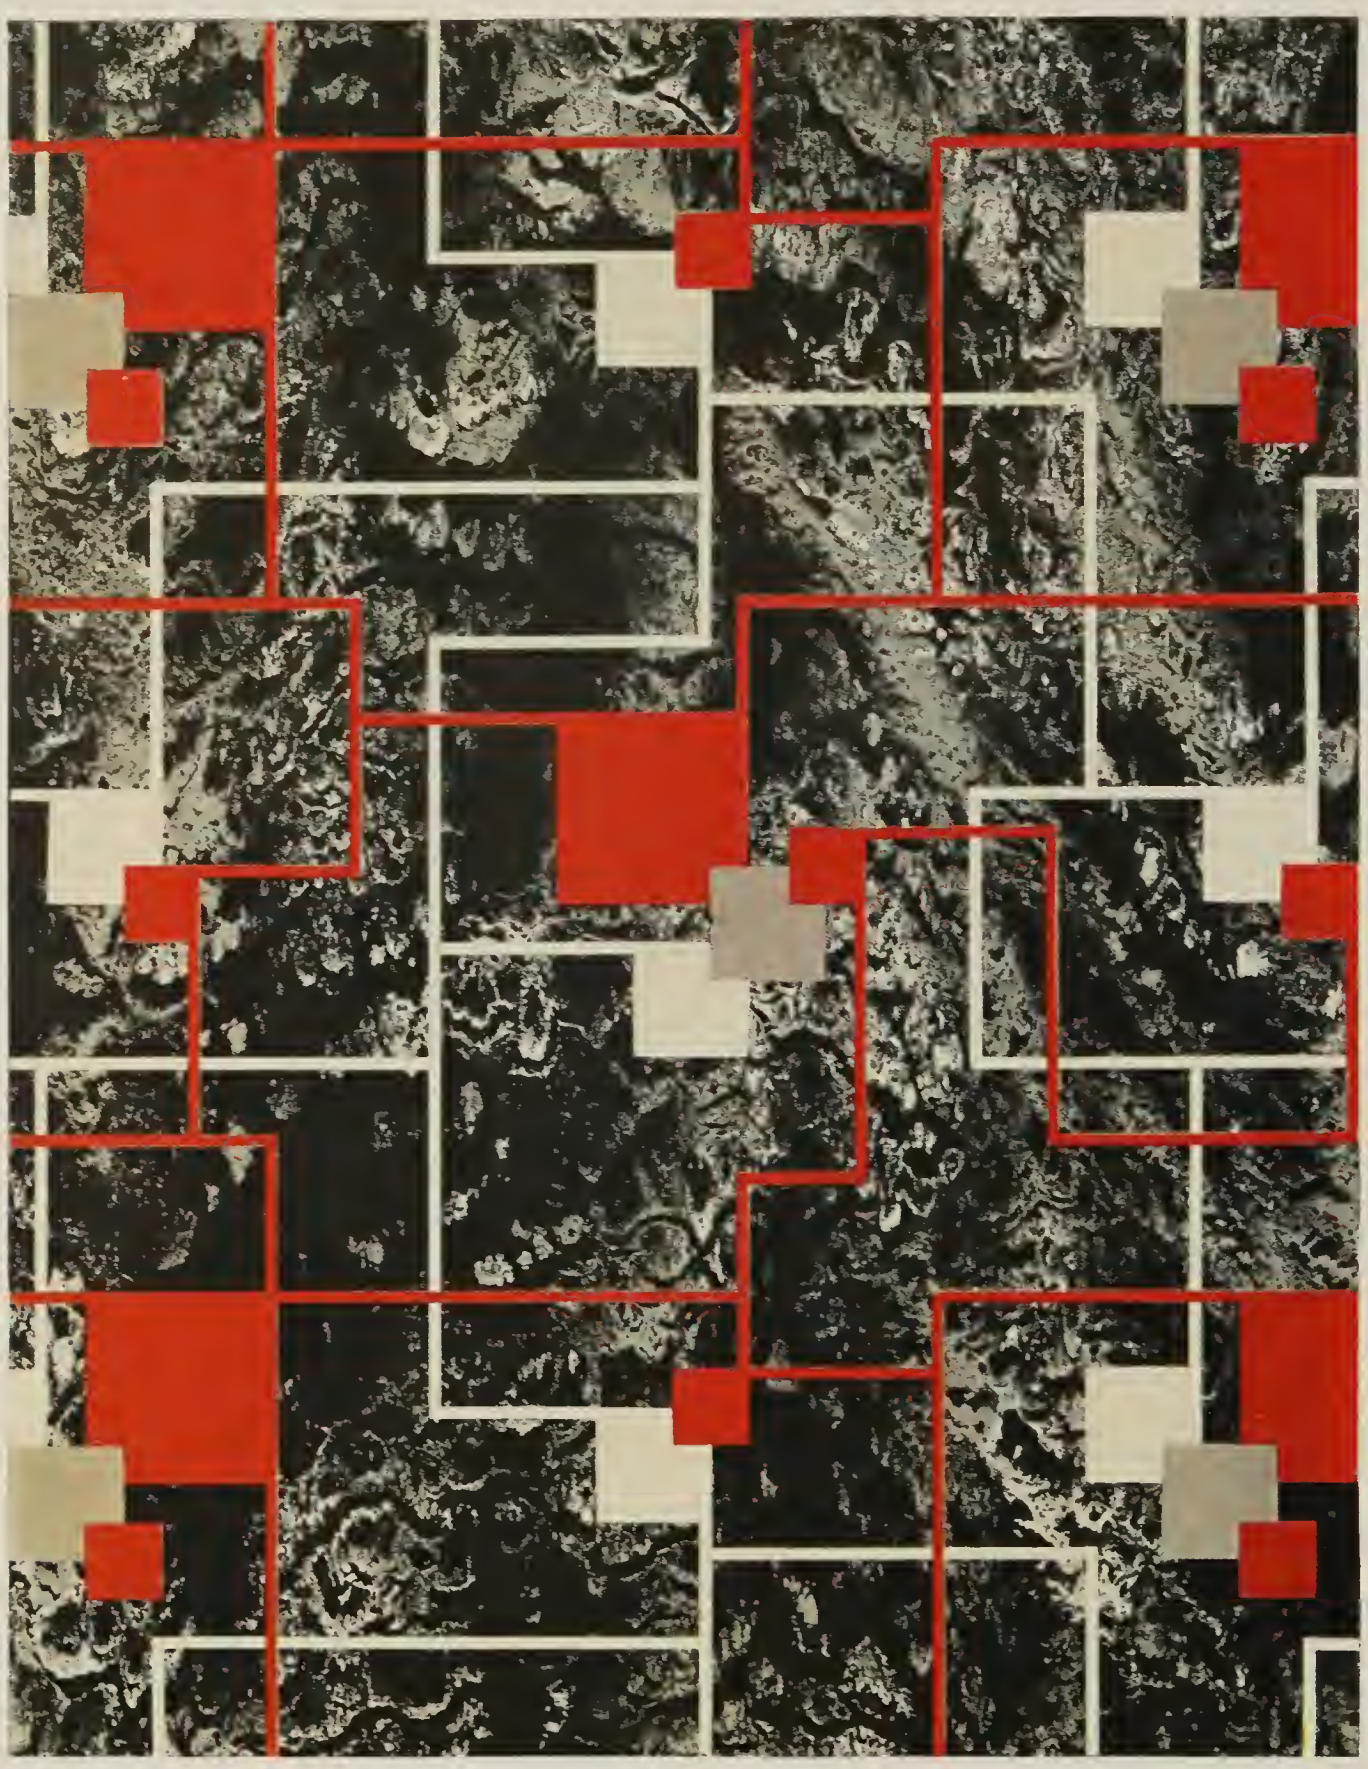

"Belvedere"

No. A7506—Standard Gauge, Adhesive Code: Adbelvedere
No. 7506—Standard Gauge, Without Adhesive Code: Belvedere

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

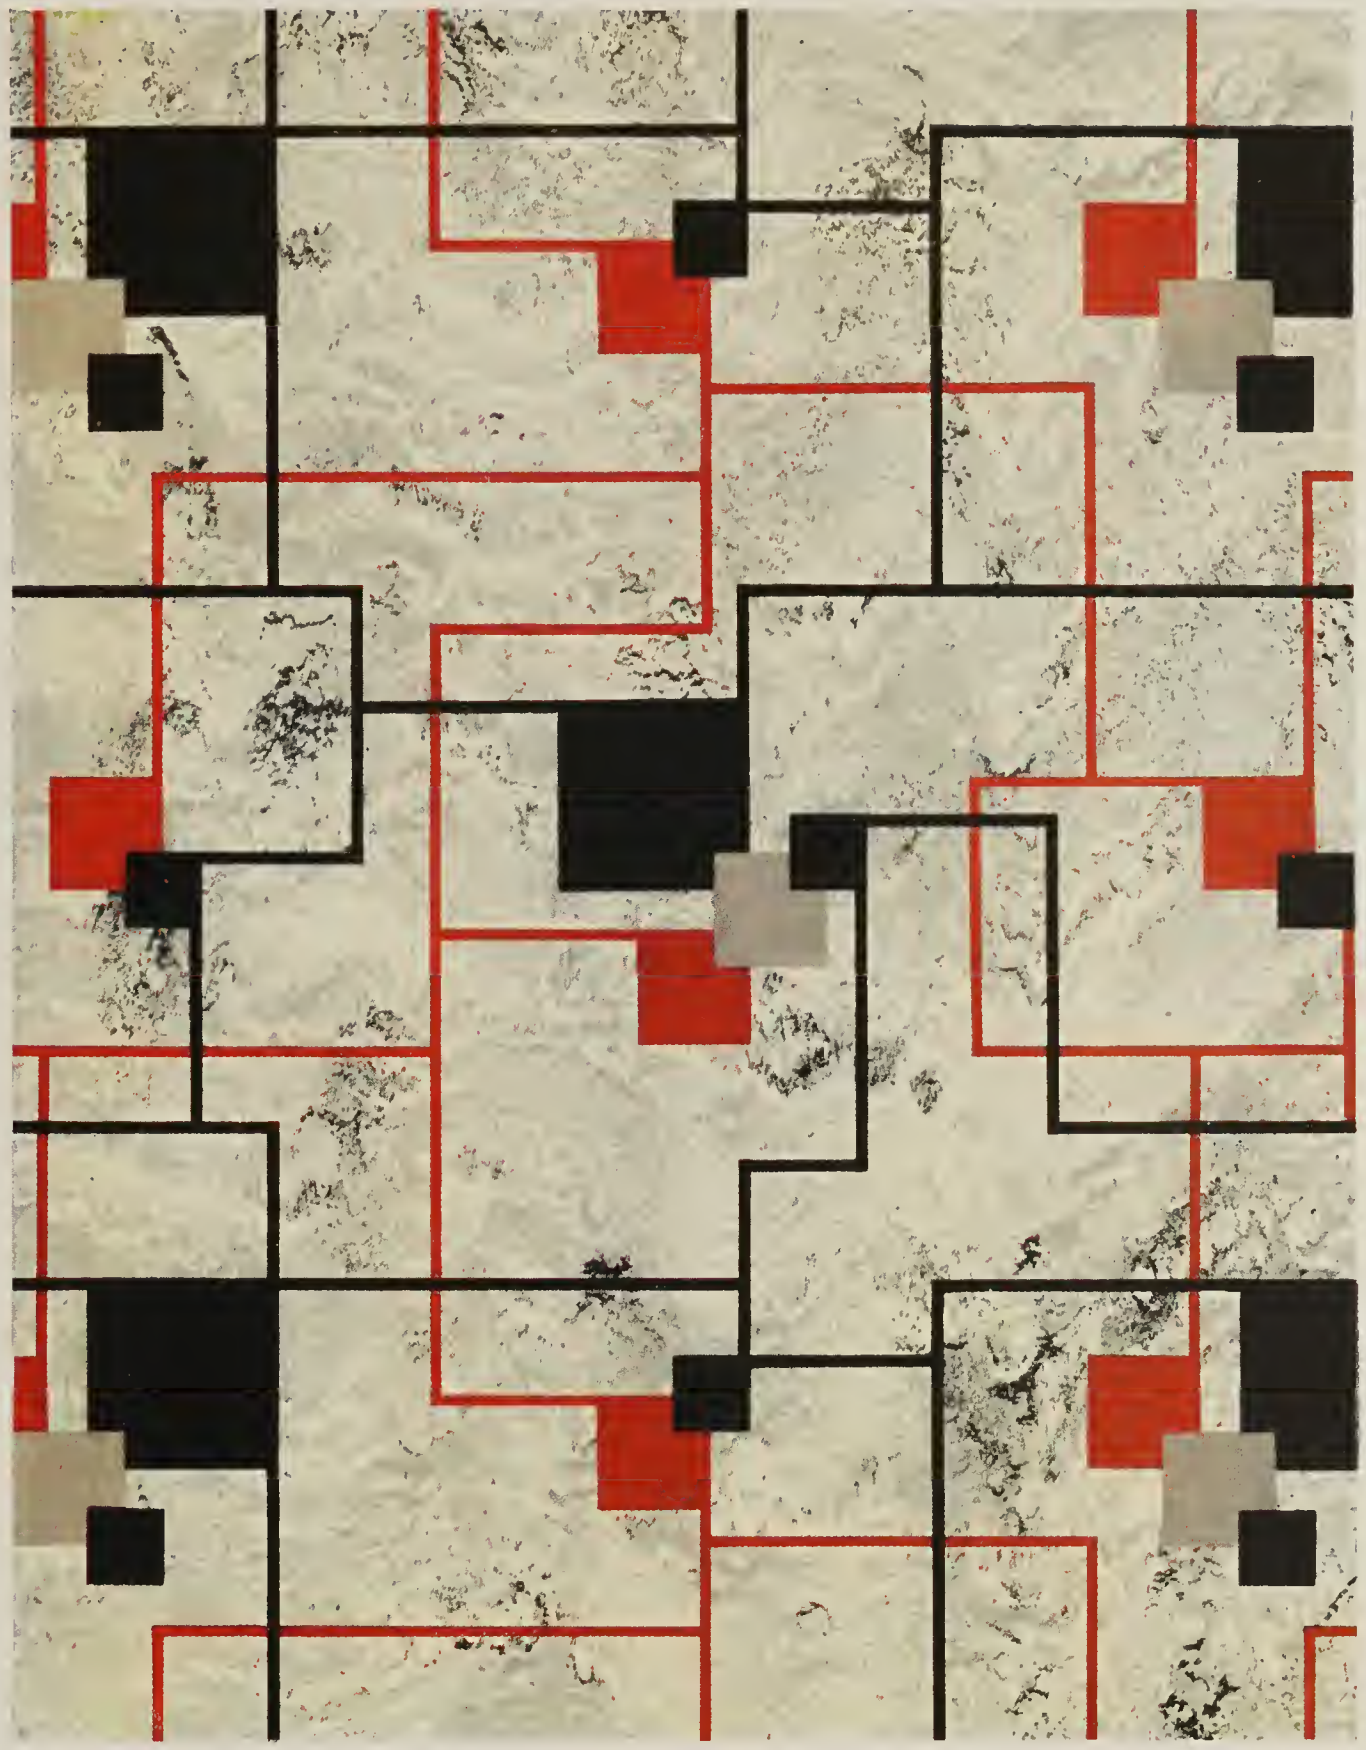

"Breslin"

No. A7507—Standard Gauge, Adhesive — Code: Adbreslin
No. 7507—Standard Gauge, Without Adhesive — Code: Breslin

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

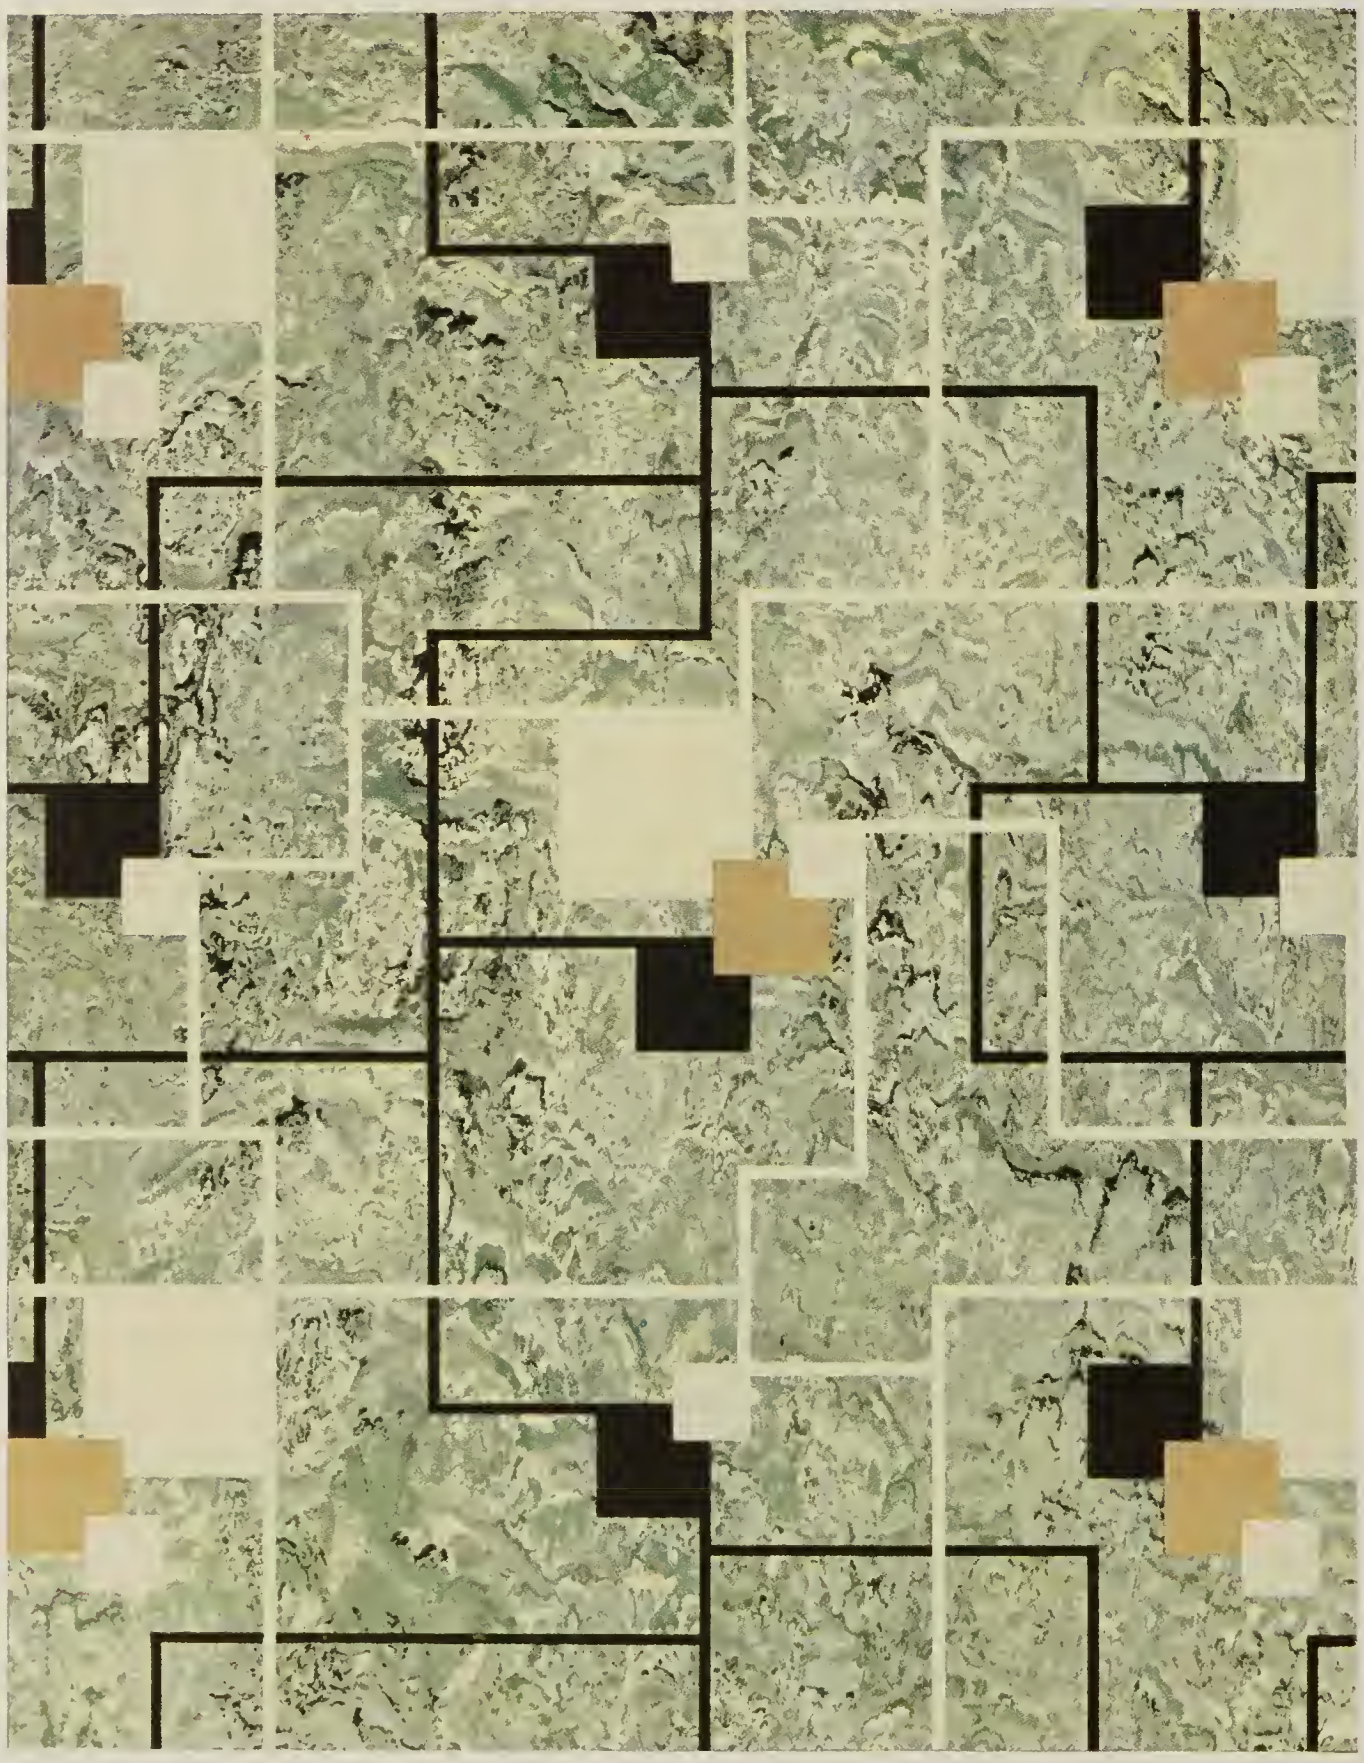

"Bristol"

No. A7508—Standard Gauge, Adhesive — Code: Adbristol
No. 7508—Standard Gauge, Without Adhesive — Code: Bristol

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

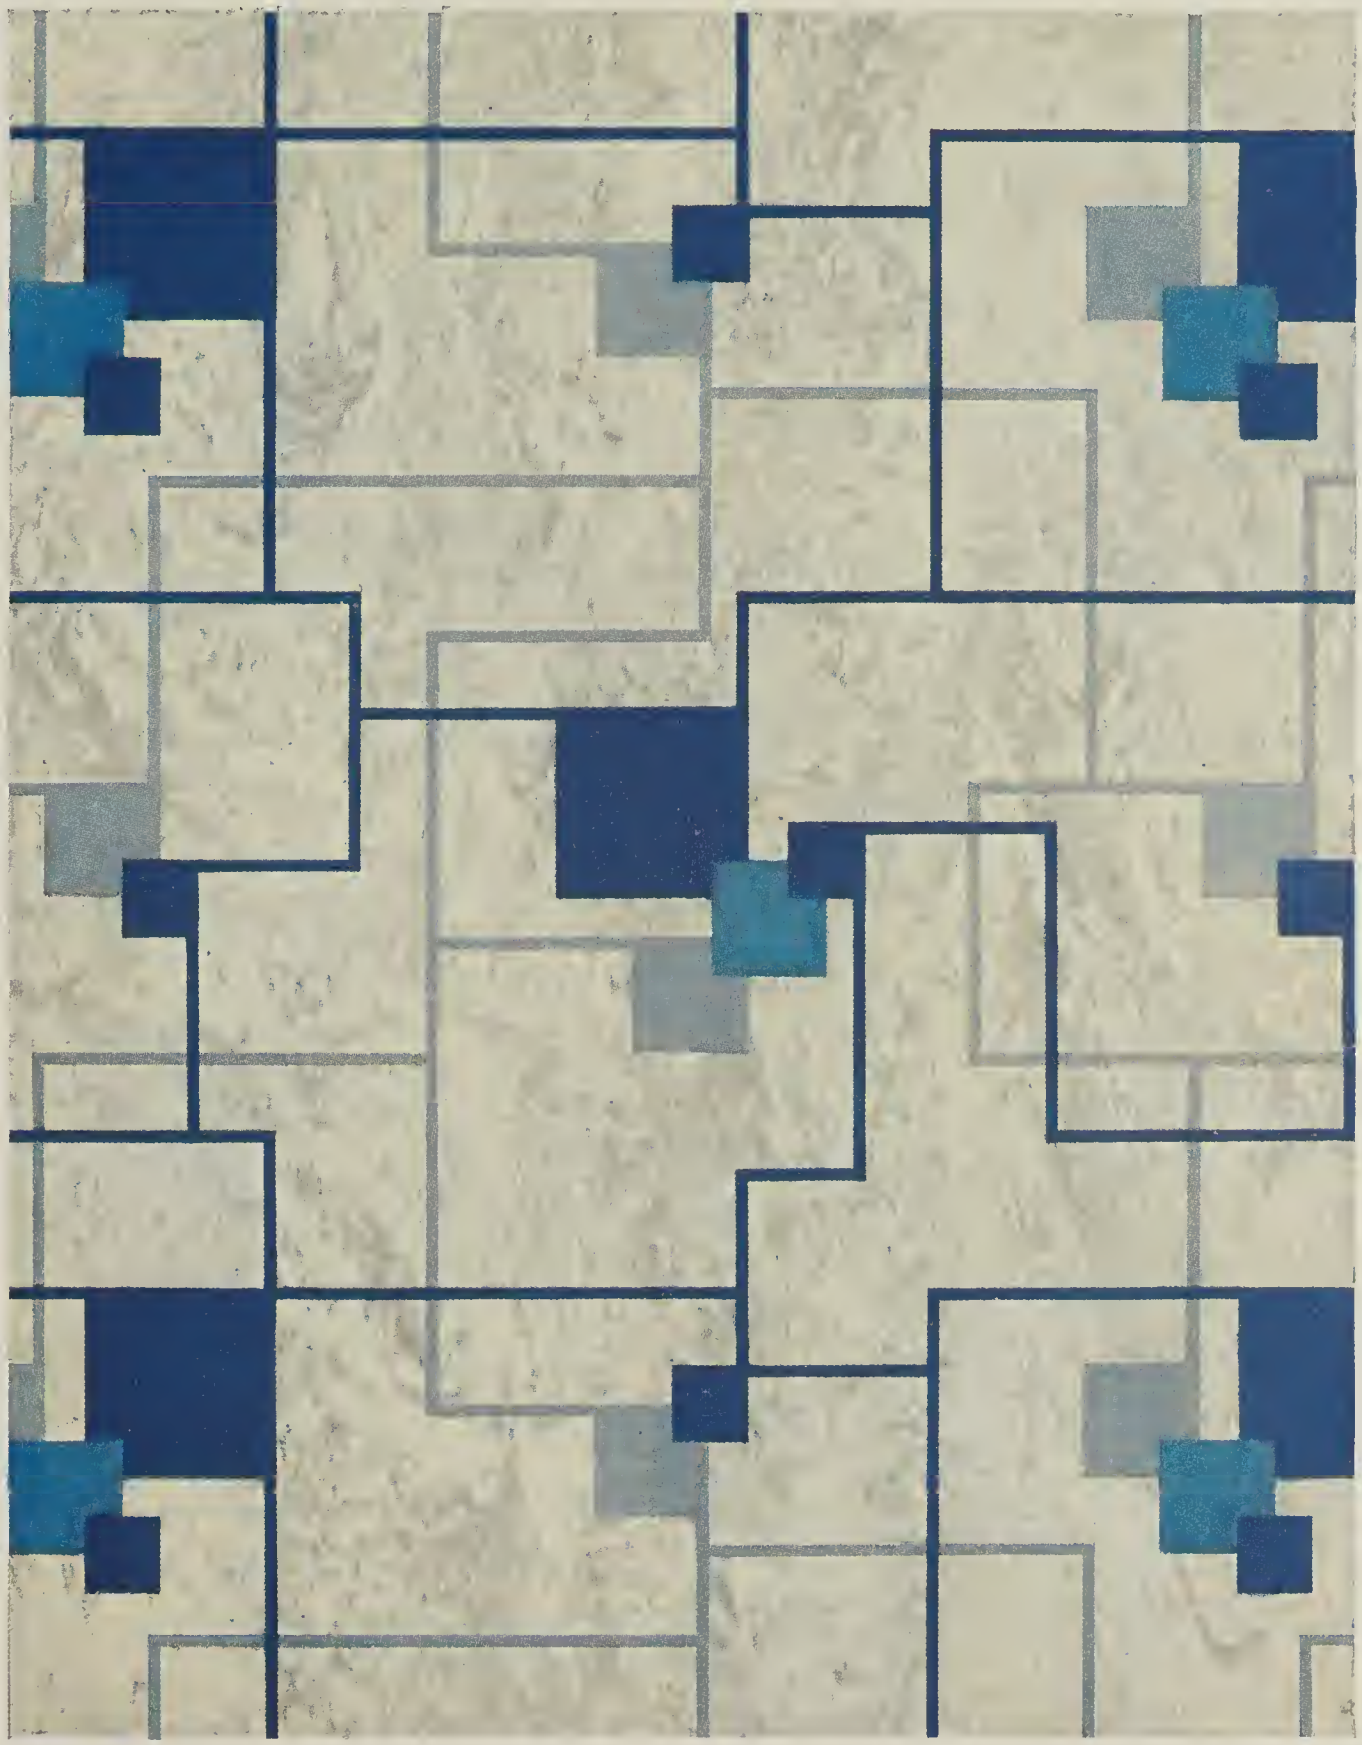

"Brewster"

No. A7509—Standard Gauge, Adhesive — Code: Adbrewster
No. 7509—Standard Gauge, Without Adhesive — Code: Brewster

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Brittany"

No. A7511—Standard Gauge, Adhesive — Code: Adbrittany
No. 7511—Standard Gauge, Without Adhesive — Code: Brittany

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Dumas"

No. A7512—Standard Gauge, Adhesive — Code: Addumas
No. 7512—Standard Gauge, Without Adhesive — Code: Dumas

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Fairfax"

No. A7513—Standard Gauge, Adhesive — Code: Adfairfax
No. 7513—Standard Gauge, Without Adhesive — Code: Fairfax

Illustration ¼ scale.

Nairn Linoleum—*Adhesive Sealex Karnean*

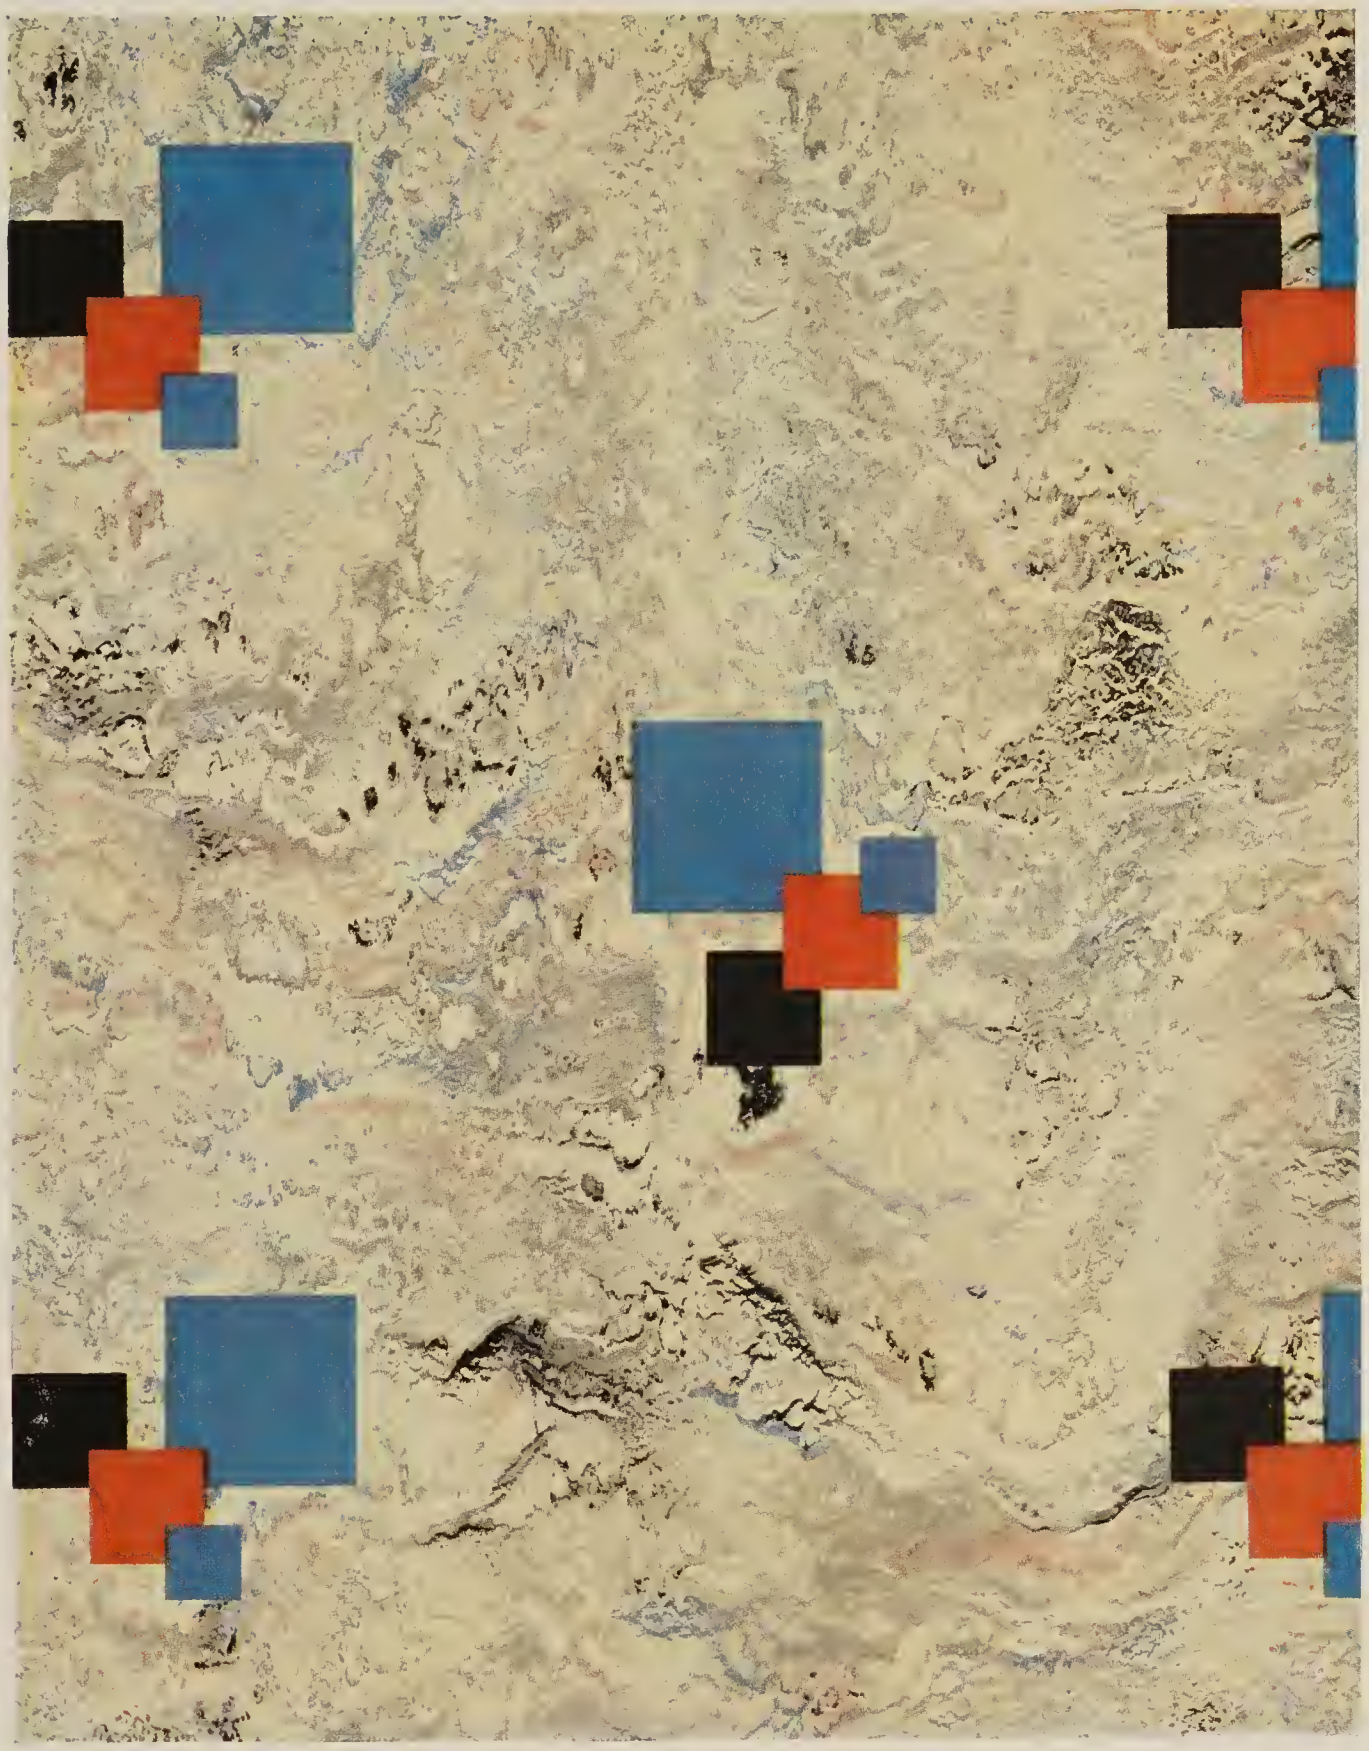

"Century"

No. A7514—Standard Gauge, Adhesive — Code: Adcentury
No. 7514—Standard Gauge, Without Adhesive — Code: Century

Illustration ¼ scale.

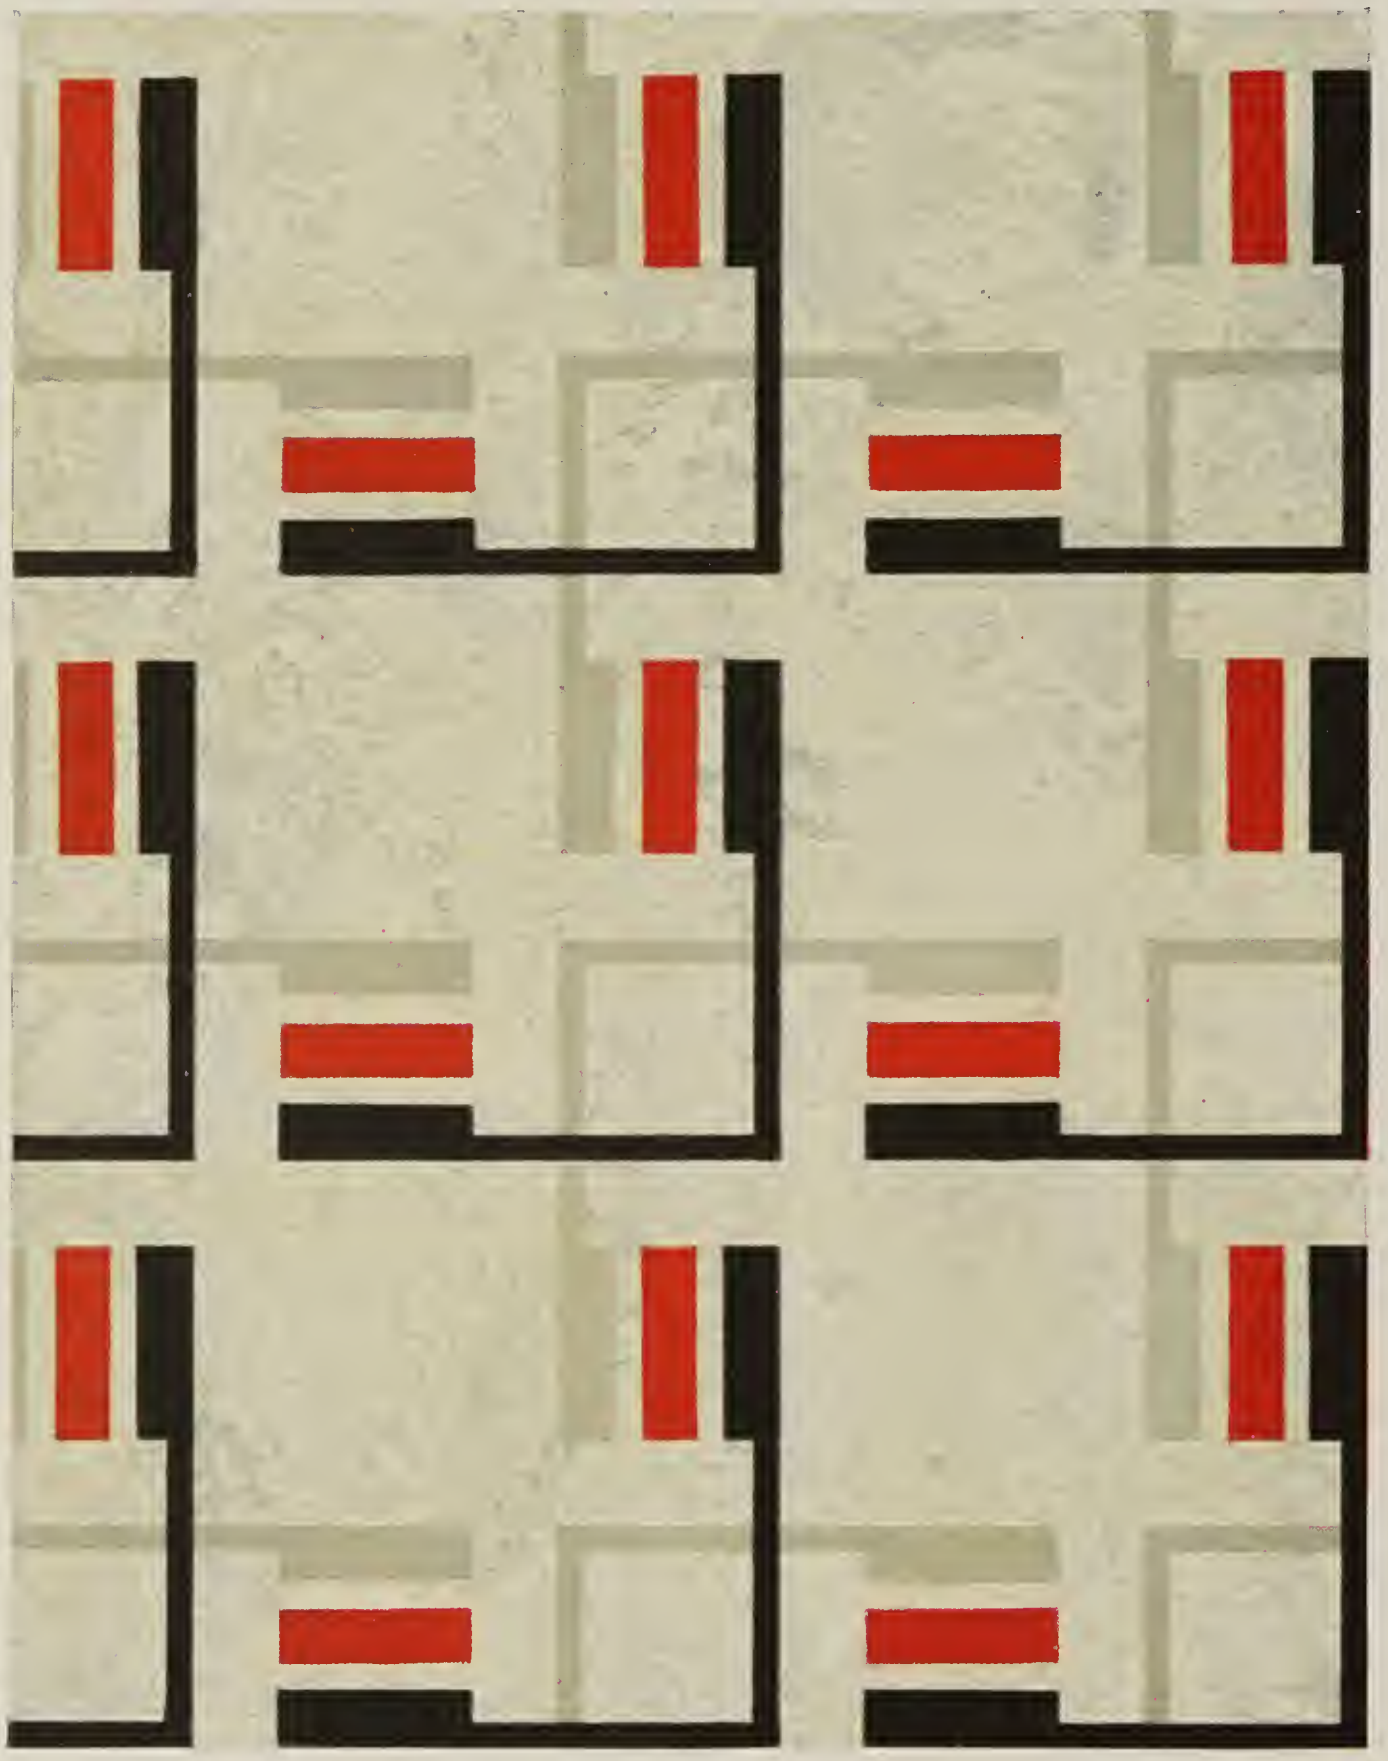

"Gregory"

No. A7523—Standard Gauge, Adhesive — Code: Adgregory
No. 7523—Standard Gauge, Without Adhesive — Code: Gregory

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

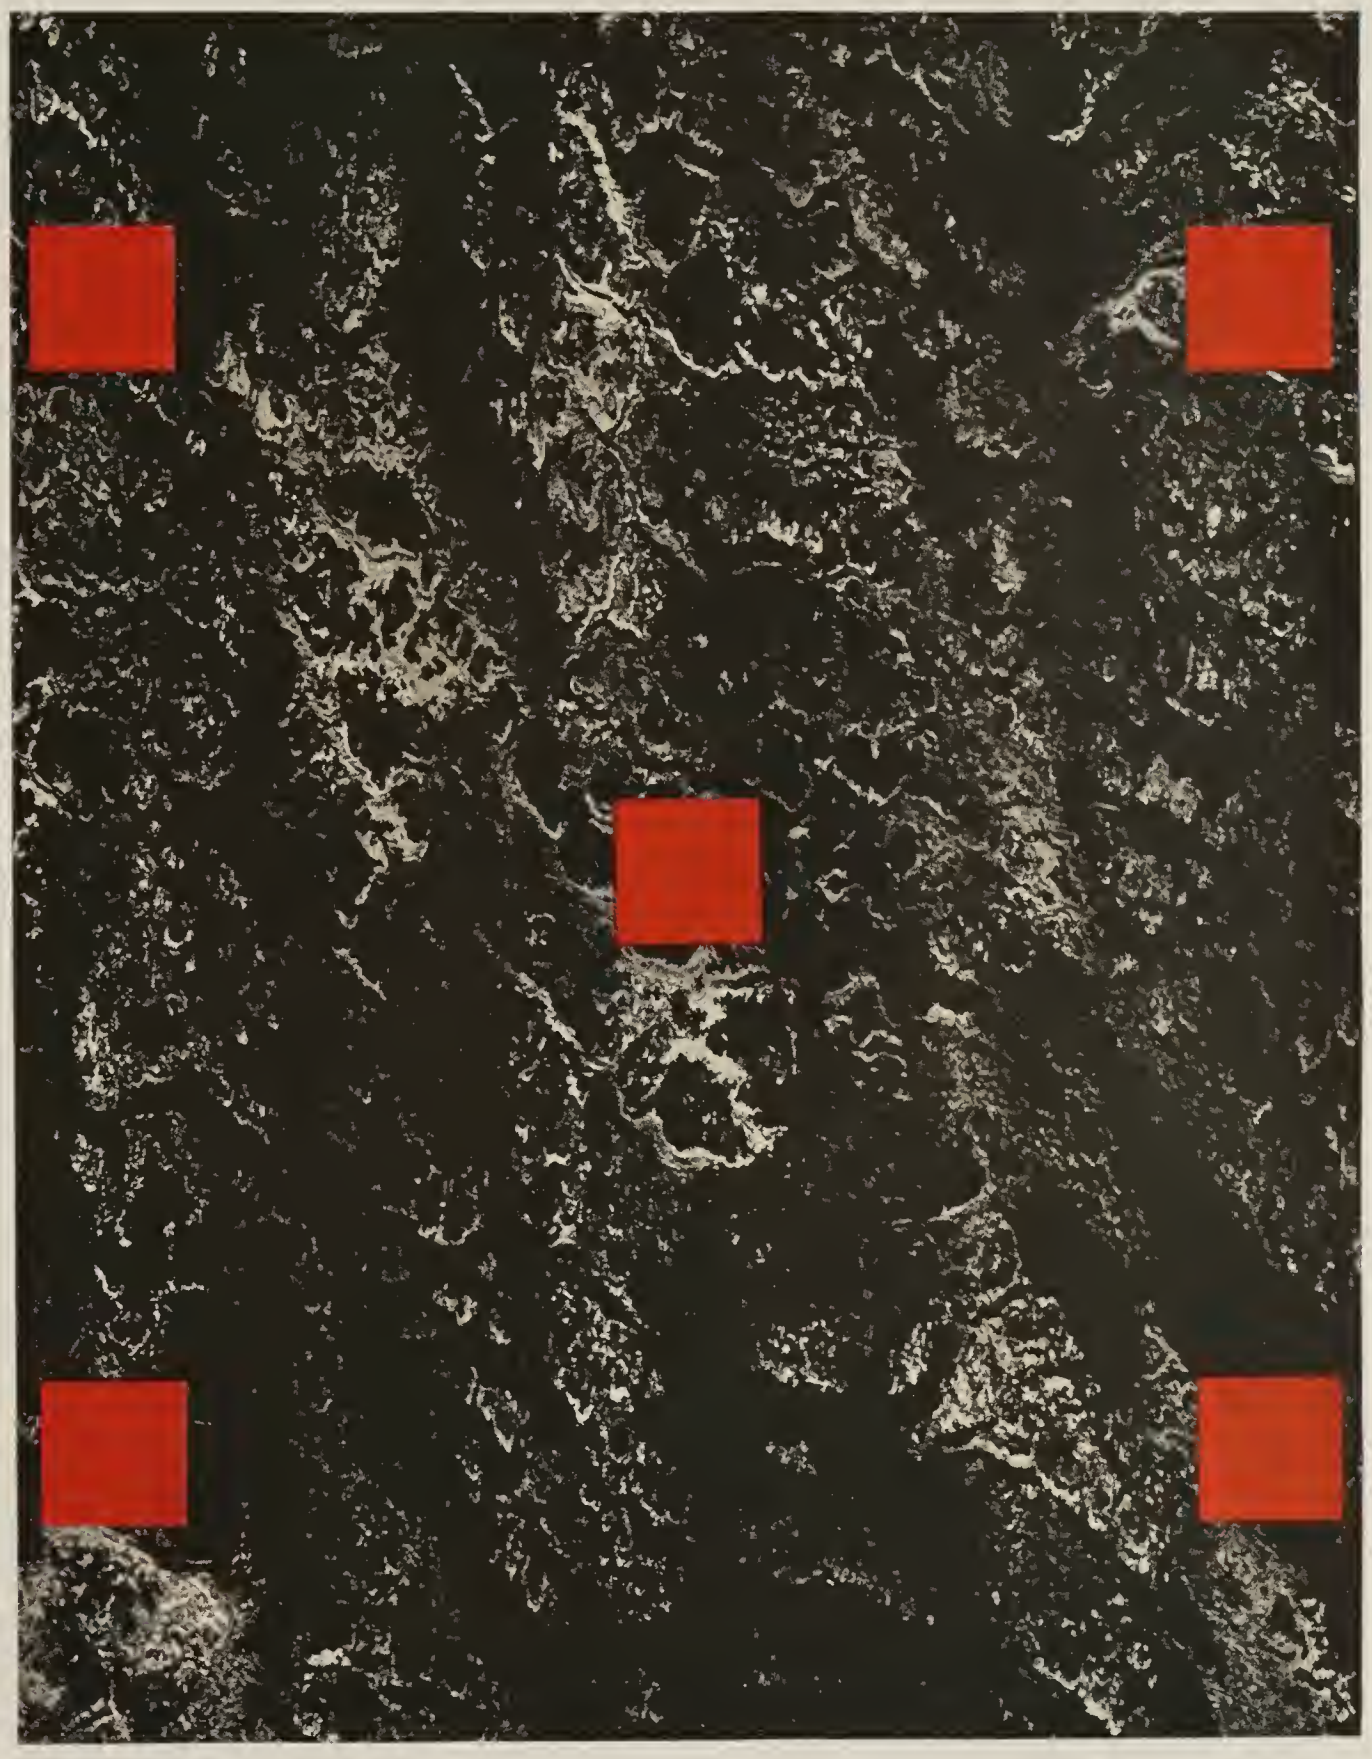

"Palmira"

No. A7525—Standard Gauge, Adhesive Code: Adpalmira
No. 7525—Standard Gauge, Without Adhesive Code: Palmira

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Puebla"

No. A7526—Standard Gauge, Adhesive — Code: Adpuebla
No. 7526—Standard Gauge, Without Adhesive — Code: Puebla

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Mantilla"

No. A7527—Standard Gauge, Adhesive Code: Admantilla
No. 7527—Standard Gauge, Without Adhesive Code: Mantilla

Illustration ¼ scale

Nairn Linoleum – *Adhesive Sealex Karnean*

"Paloma"

No. A7528—Standard Gauge, Adhesive — Code: Adpaloma
No. 7528—Standard Gauge, Without Adhesive — Code: Paloma

Illustration $^{1}/_{4}$ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Hunterdon"

No. A7530—Standard Gauge, Adhesive — Code: Adhunterdon
No. 7530—Standard Gauge, Without Adhesive — Code: Hunterdon

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Weymouth"

No. A7531—Standard Gauge, Adhesive Code: Adweymouth
No. 7531—Standard Gauge, Without Adhesive Code: Weymouth

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

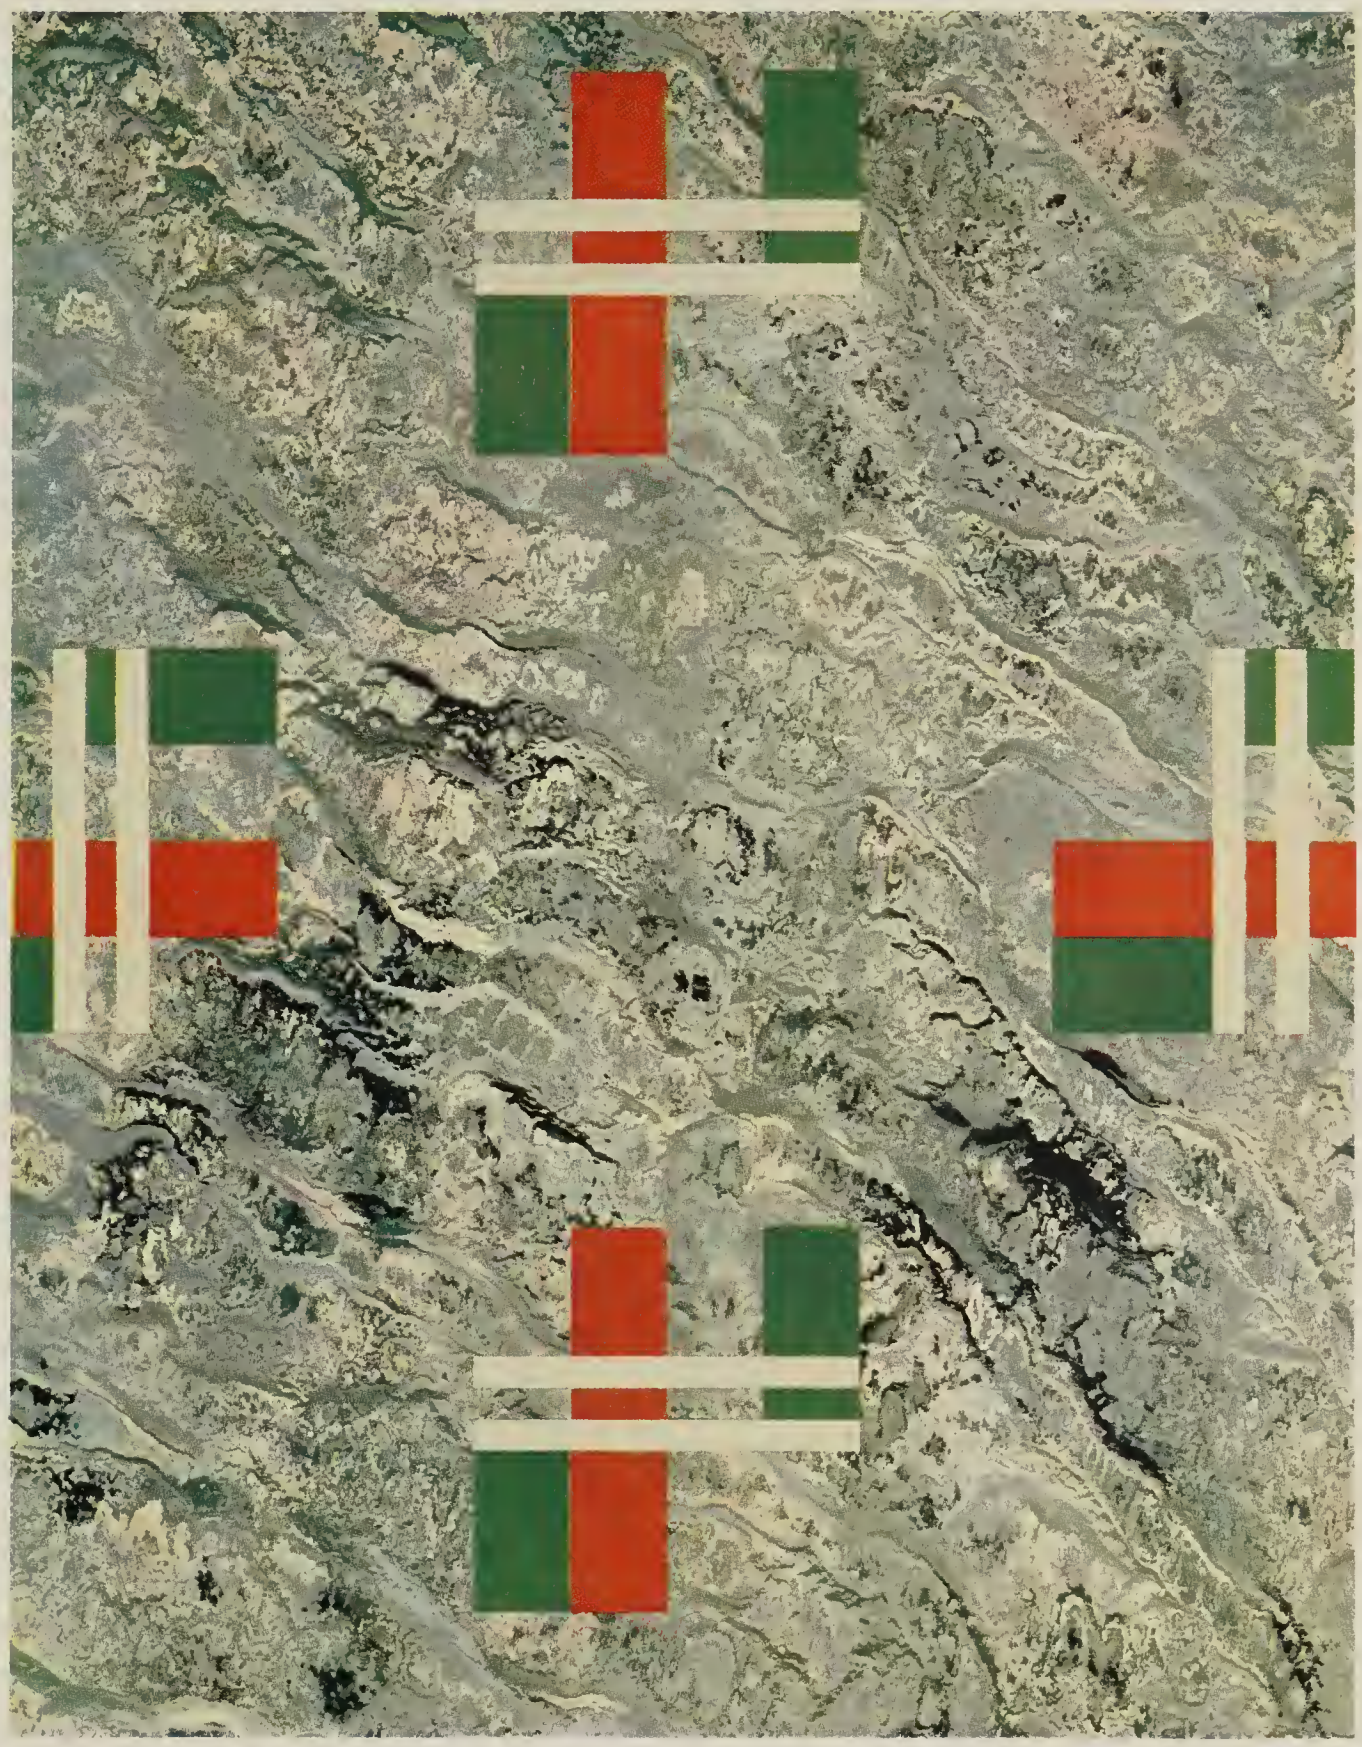

"Cascade"

No. A7532—Standard Gauge, Adhesive — Code: Adcascade
No. 7532—Standard Gauge, Without Adhesive — Code: Cascade

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Summit"

No. A7533—Standard Gauge, Adhesive — Code: Adsummit
No. 7533—Standard Gauge, Without Adhesive — Code: Summit

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

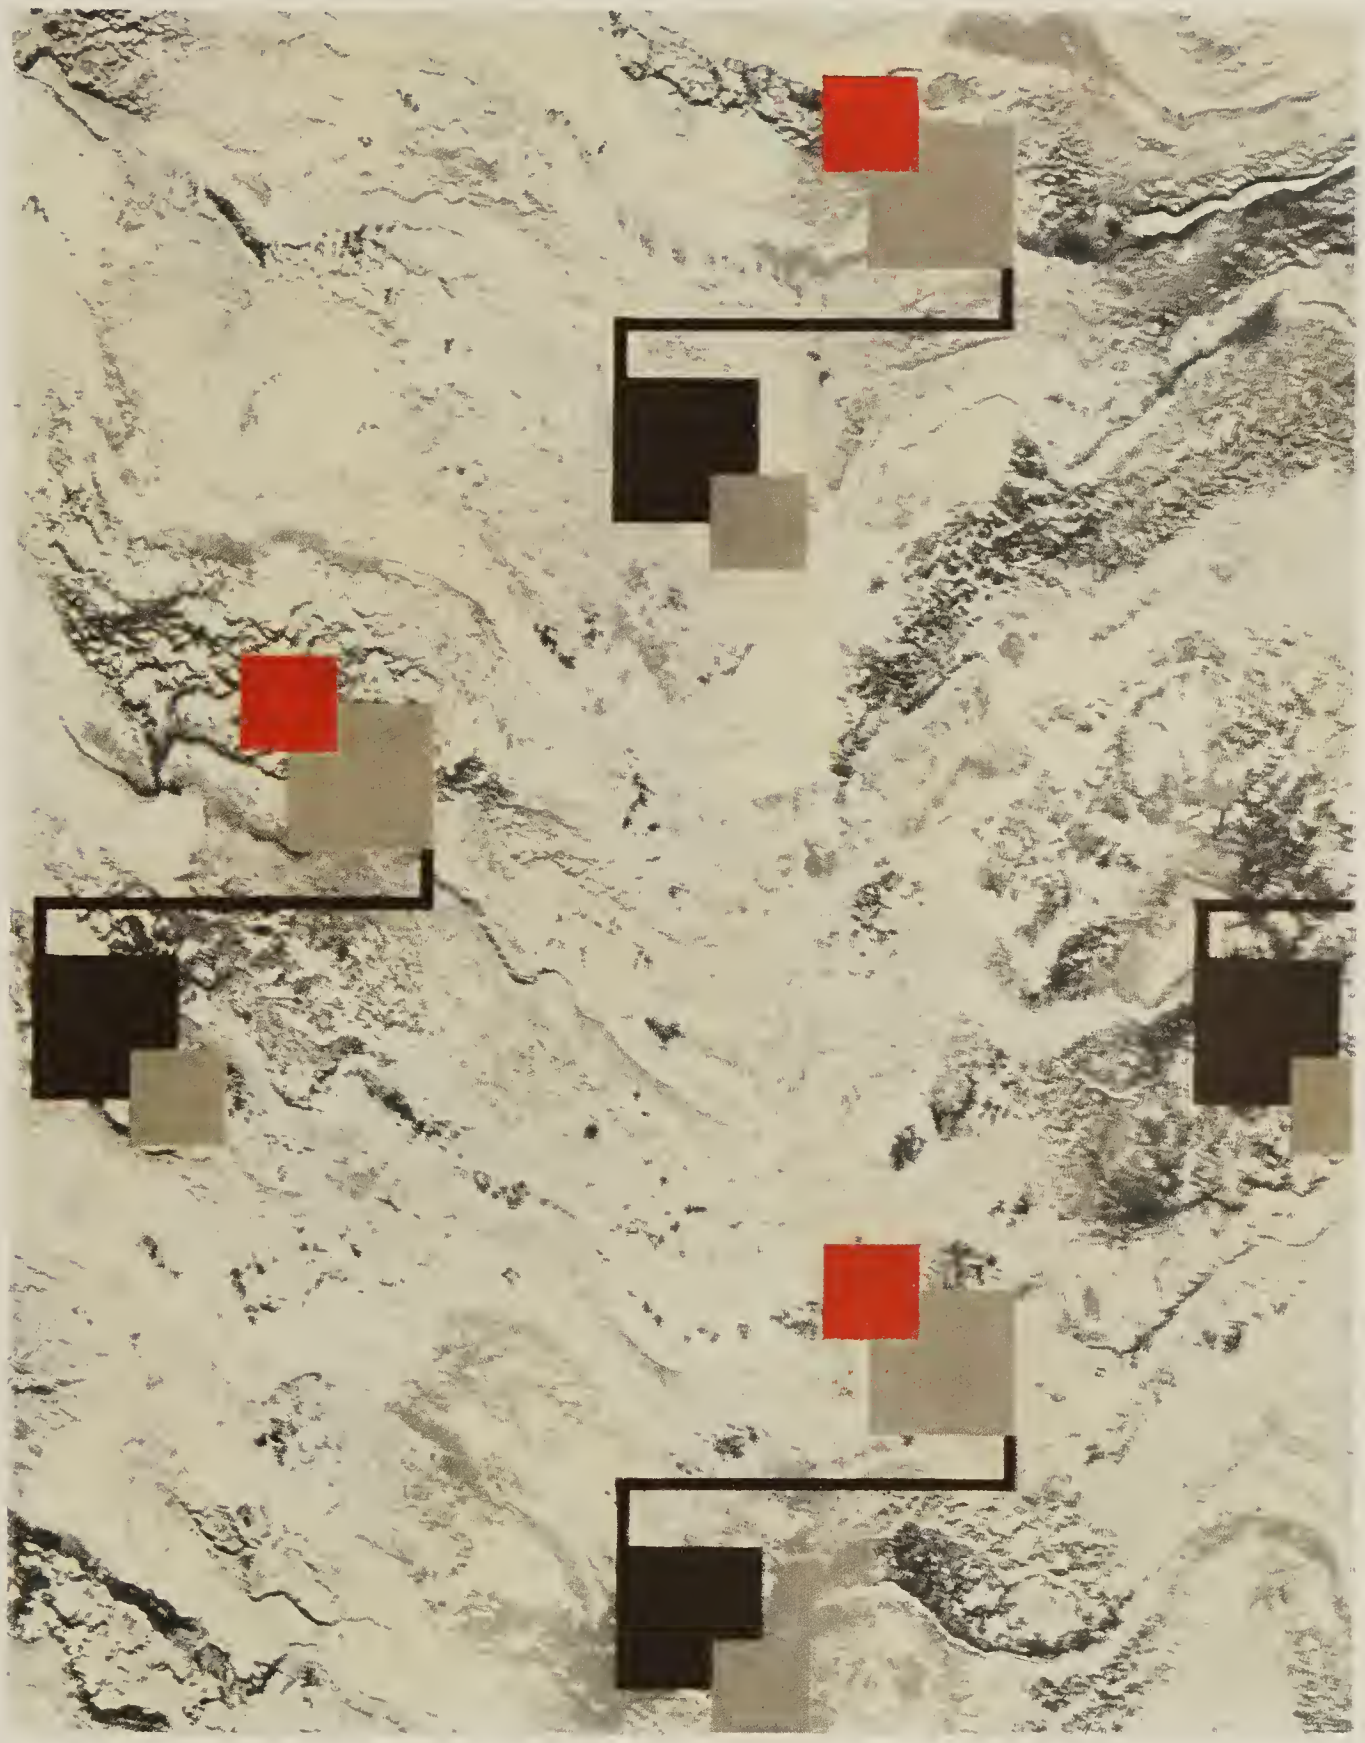

"Weldon"

No. A7535—Standard Gauge, Adhesive — Code: Adweldon
No. 7535—Standard Gauge, Without Adhesive — Code: Weldon

Illustration ¼ scale.

Nairn Linoleum—*Adhesive Sealex Karnean*

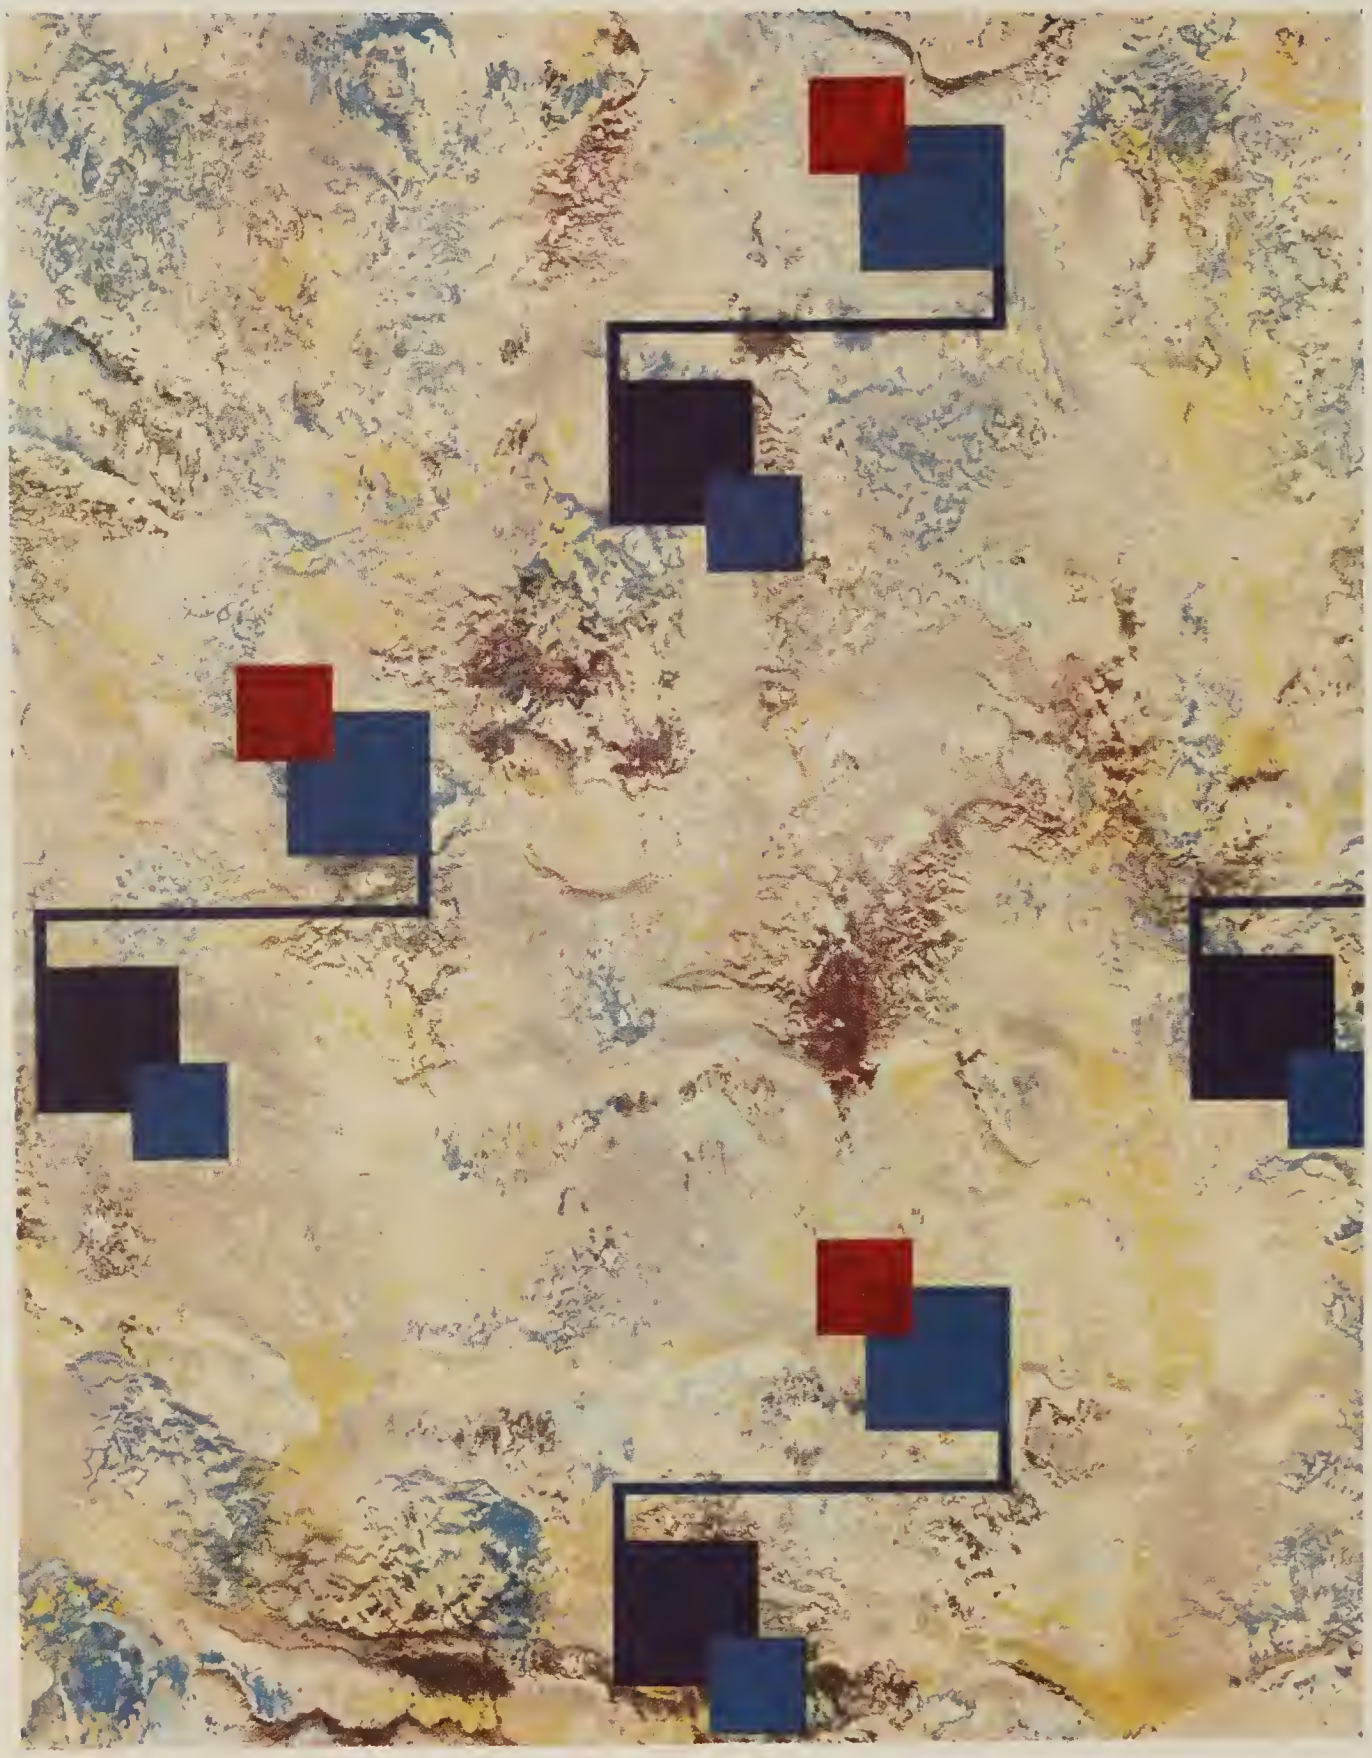

"Cameron"

No. A7536—Standard Gauge, Adhesive — Code: Adcameron
No. 7536—Standard Gauge, Without Adhesive — Code: Cameron

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

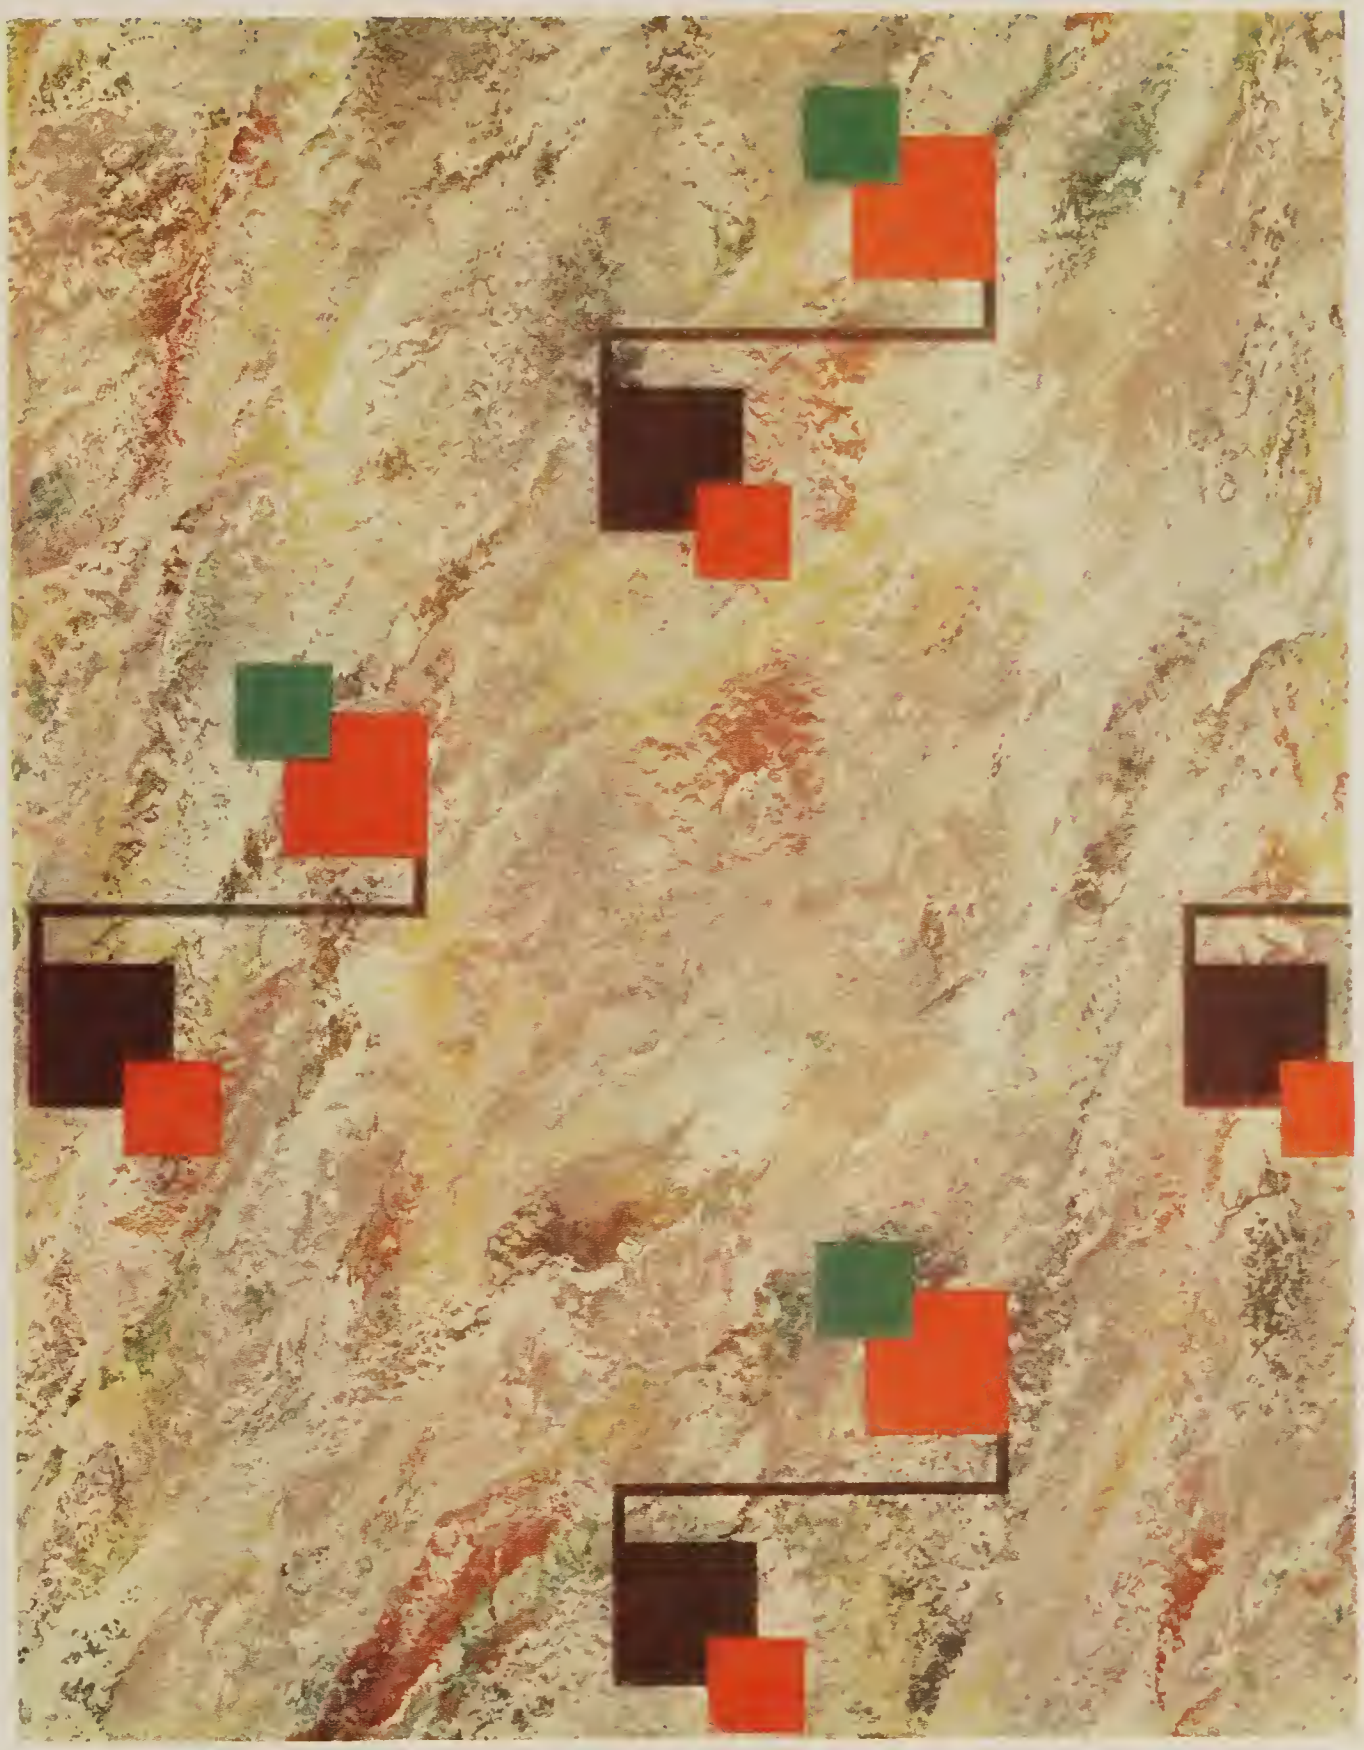

"Margate"

No. A7537—Standard Gauge, Adhesive — Code: Admargate
No. 7537—Standard Gauge, Without Adhesive — Code: Margate

Illustration ¼ scale.

Nairn Linoleum—*Adhesive Sealex Karnean*

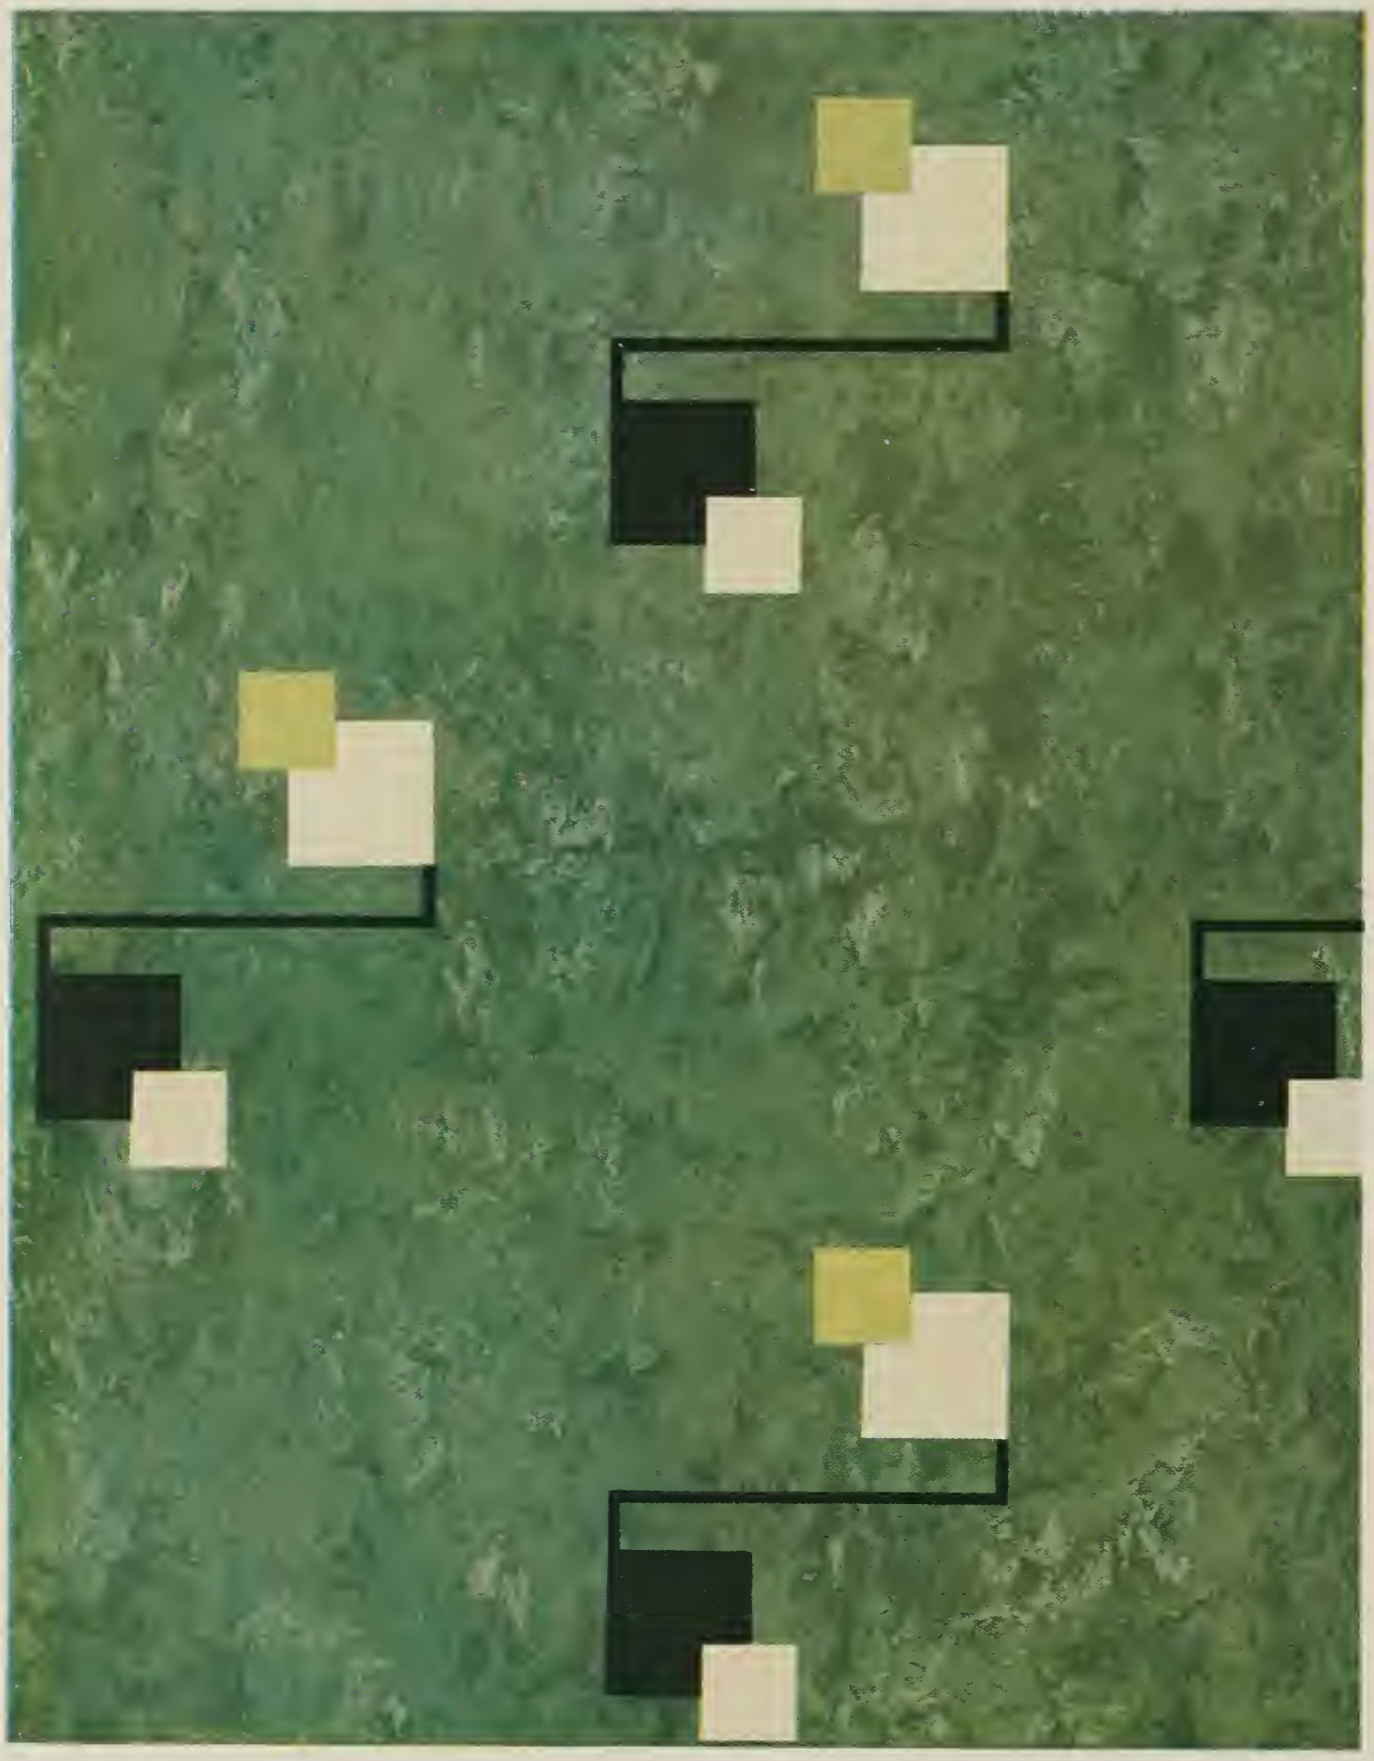

"Romney"

No. A7538—Standard Gauge, Adhesive — Code: Adromney
No. 7538—Standard Gauge, Without Adhesive — Code: Romney

Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

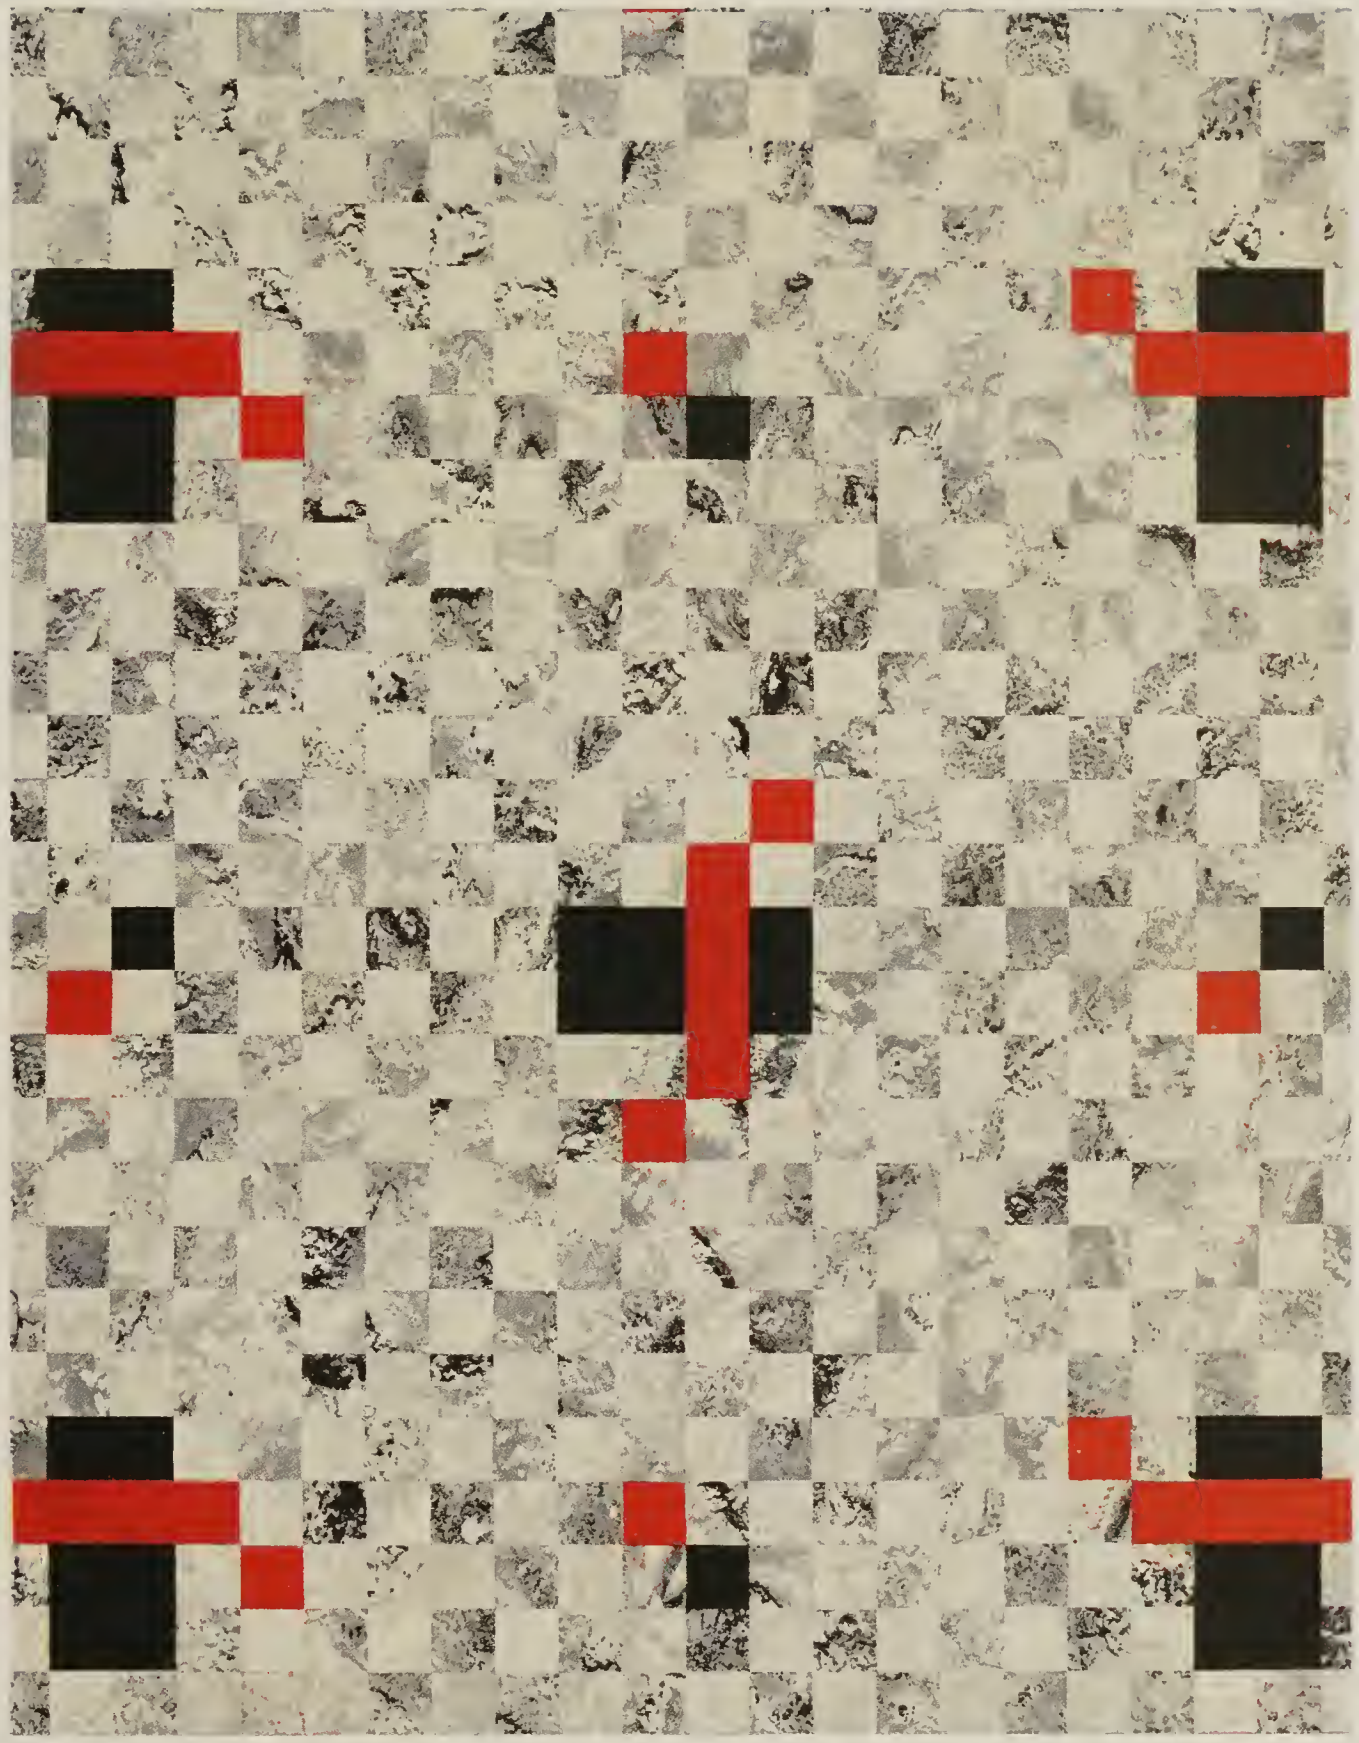

"Grafton"

No. A7540—Standard Gauge, Adhesive — Code: Adgrafton
No. 7540—Standard Gauge, Without Adhesive — Code: Grafton

Actual size of square units: 1". Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

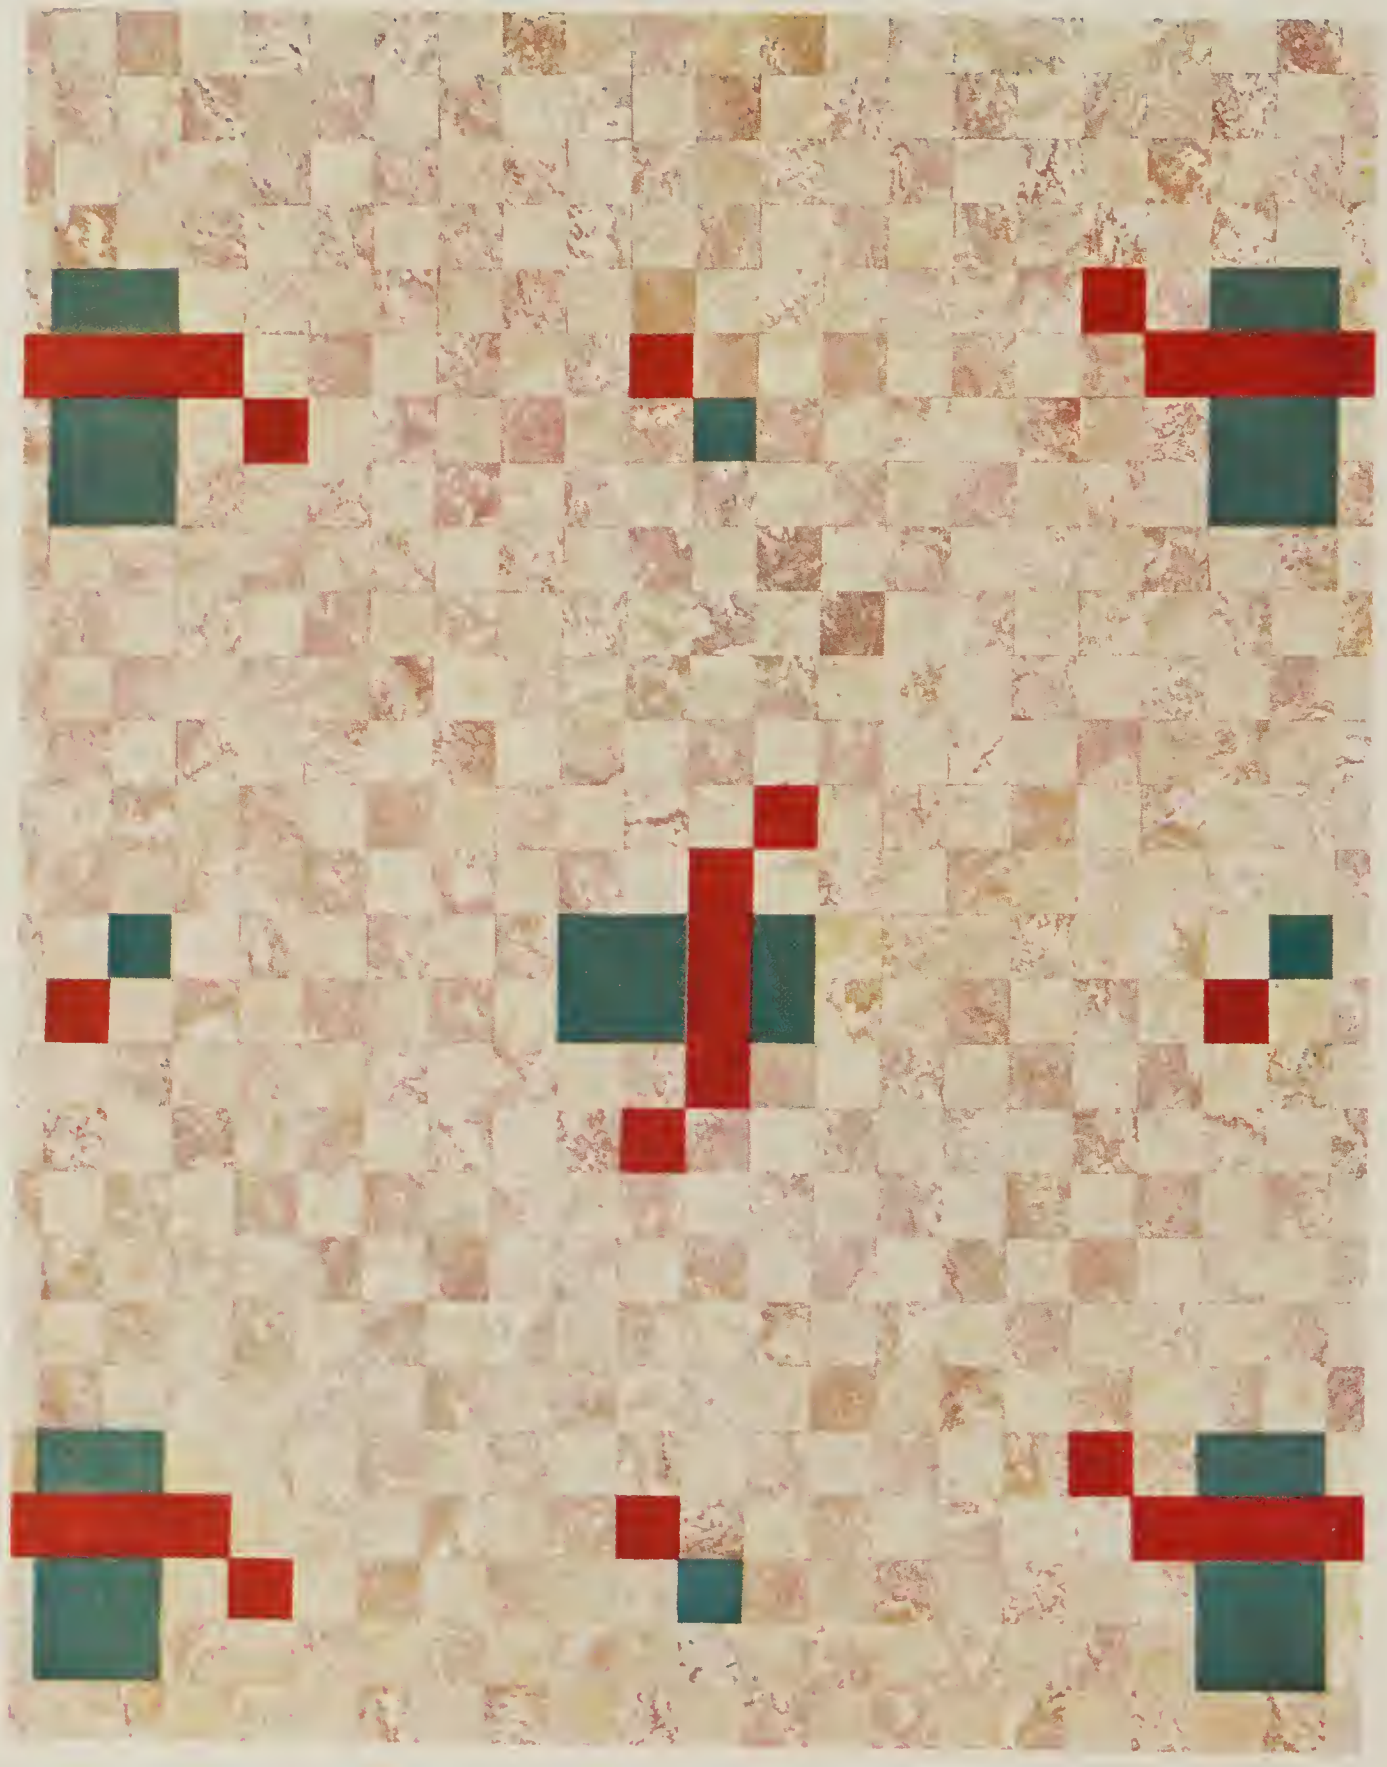

"Darwin"

No. A7541—Standard Gauge, Adhesive — Code: Addarwin
No. 7541—Standard Gauge, Without Adhesive — Code: Darwin

Actual size of square units: 1″. Illustration ¼ scale.

Nairn Linoleum – *Adhesive Sealex Karnean*

"Ventnor"

No. A7542—Standard Gauge, Adhesive — Code: Adventnor
No. 7542—Standard Gauge, Without Adhesive — Code: Ventnor

Actual size of square units: 1". Illustration ¼ scale.

Nairn Linoleum—*Treadlite*

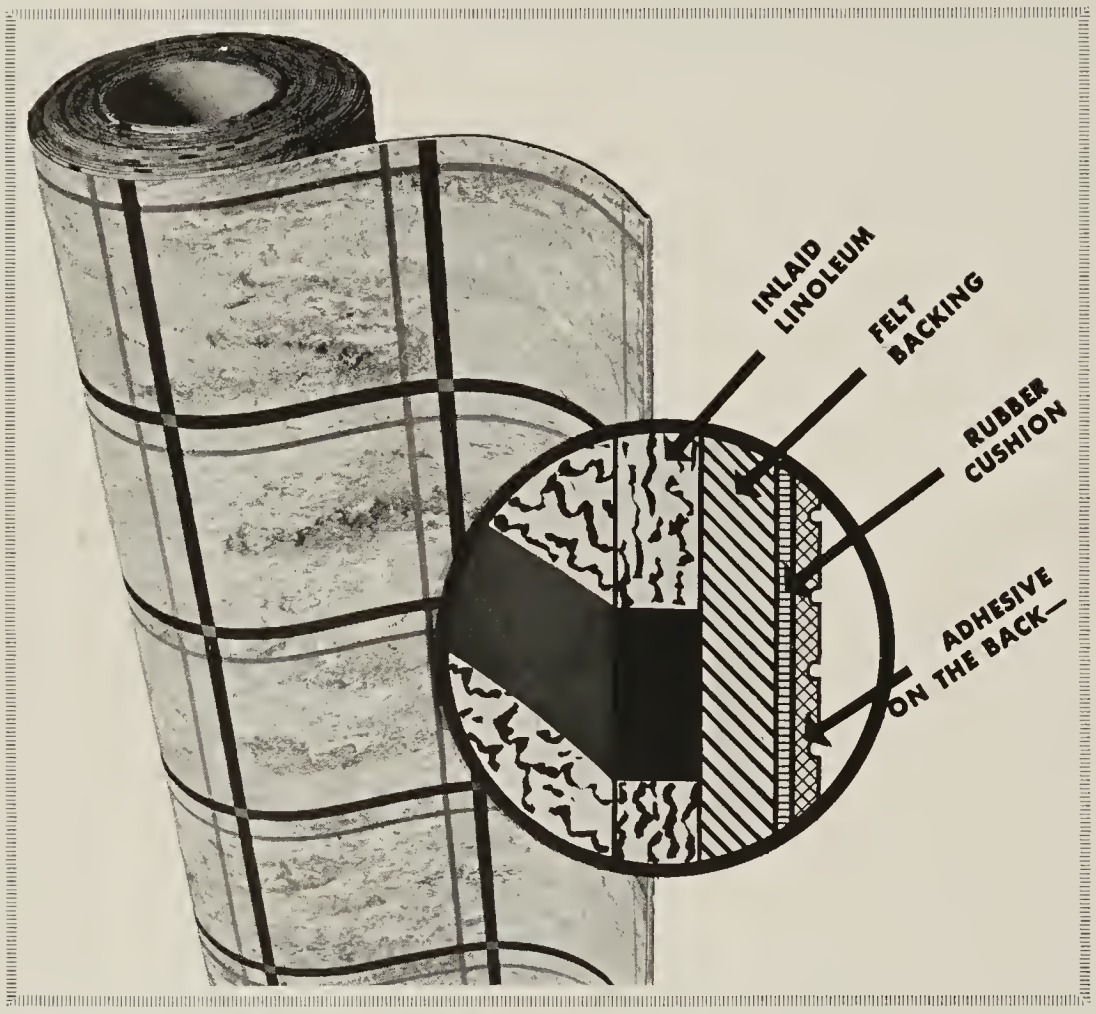

Patent No. 1,970,503

CONGOLEUM-NAIRN leads the way with another spectacular new linoleum development! The sensationally successful, new Nairn Treadlite Linoleum, with the built-in rubber cushion, gives you a genuine inlaid linoleum unmatched in its price field.

It features a unique and exclusive new rubber cushion which solves in spectacular fashion one of the biggest problems in the linoleum industry—the problem of expanding and contracting floor boards.

LOOK AT THESE REVOLUTIONARY VALUE-FEATURES IN NAIRN TREADLITE LINOLEUM!

1. **GENUINE INLAID LINOLEUM** of the finest quality. Advanced beauty of design and color that makes Treadlite a consumer favorite.

2. **THE FELT BACKING** used in Nairn Treadlite Linoleum is a tested and proved Congoleum-Nairn product—tough, long-lasting and completely waterproof.

3. **THE RUBBER CUSHION** is the star of the show in this product. You can confidently assure your clients that the new Treadlite floor will have no ugly blisters, buckles or splits. The exclusive rubber cushion positively eliminates all troubles arising from expanding and contracting floor boards. And your clients will be glad to know of the added resilience and quieting effect of the rubber cushion. Still another point—should replacement ever be necessary, Nairn Treadlite Linoleum may be readily removed from the floor.

4. **ADHESIVE ON THE BACK!** The factory-applied adhesive—exclusive Congoleum-Nairn development—permits laying Treadlite direct to the underfloor. It provides a vise-like grip over every square inch of the floor. Makes a stronger, longer-lasting installation.

Nairn Treadlite Linoleum has been installed in thousands of homes. It is dramatically demonstrating its ability to provide smoother, more comfortable floors—more beautiful, longer-lasting floors at a lower cost.

Nairn Linoleum – *Treadlite*

Actual size of plaids: 9″ x 9″. Illustration ¼ scale.

Code: Shetland

"Shetland"—No. 9036

Illustration ¼ scale.

Code: Tuscany

"Tuscany"—No. 9037

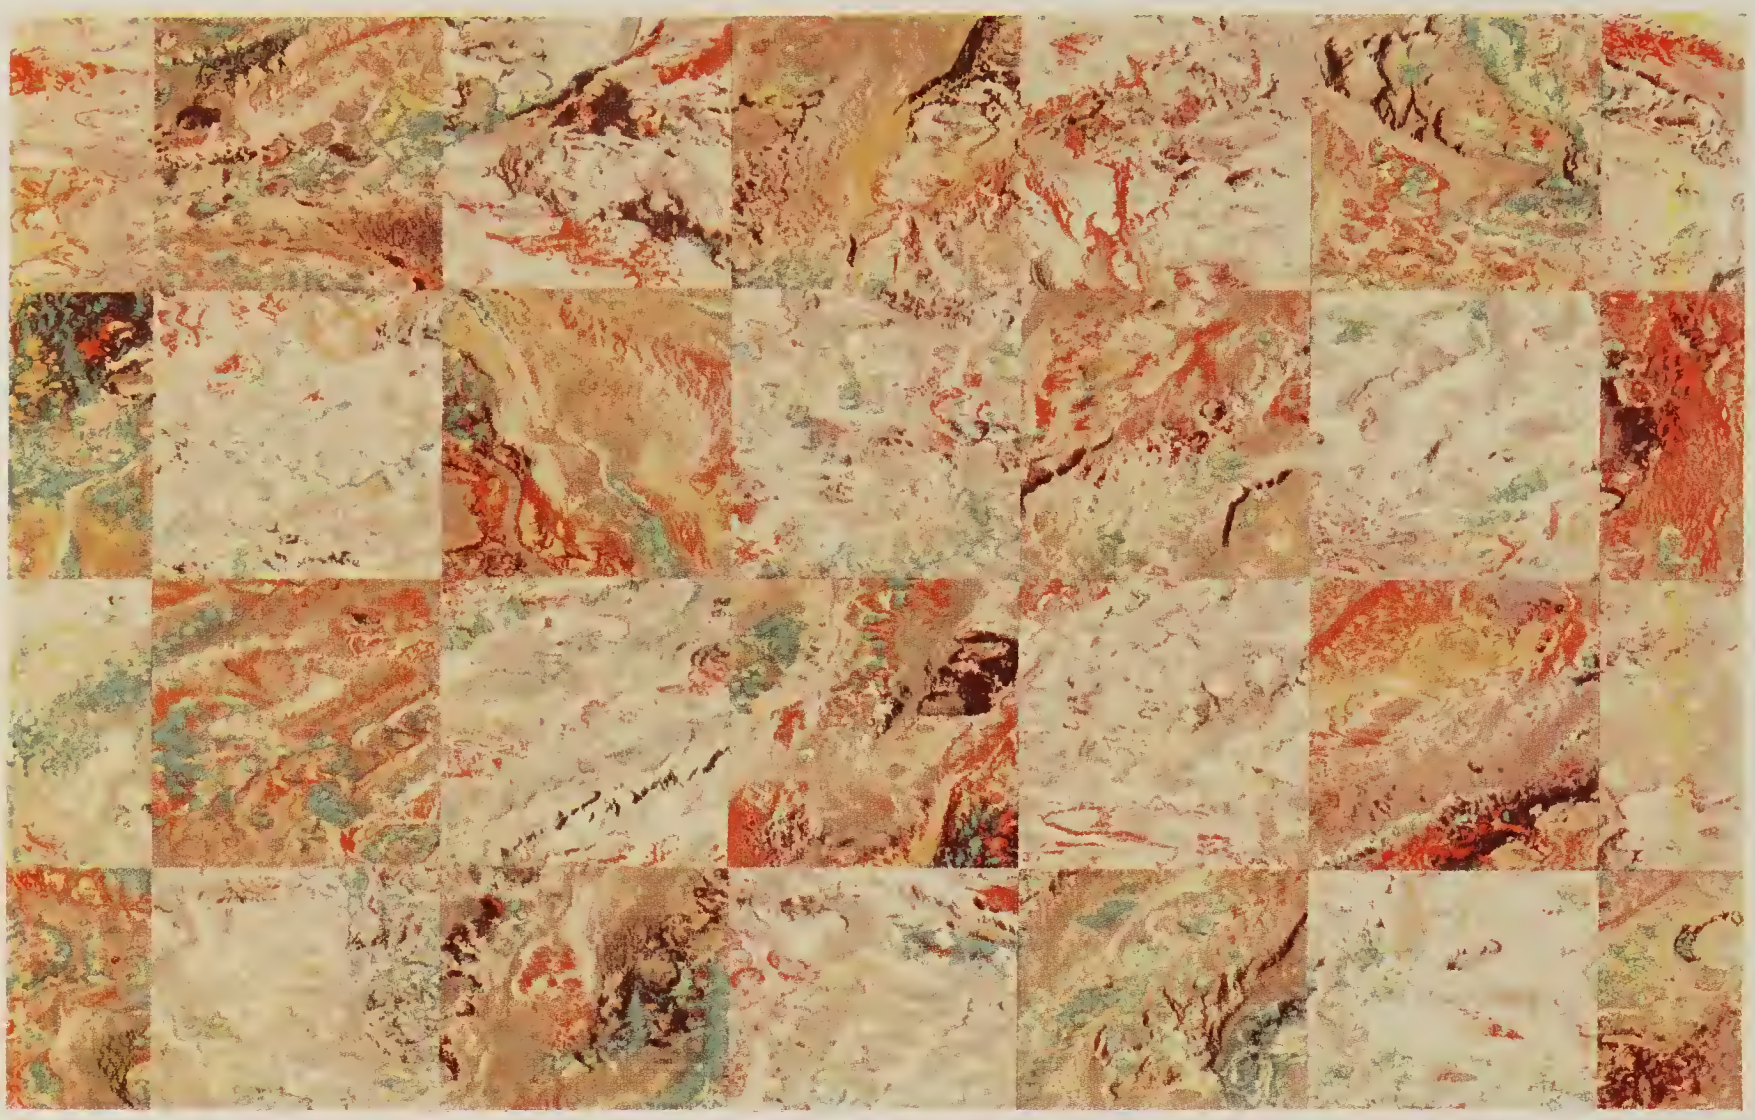

"Aladdin"—No. 9049 Code: Aladdin Actual size of tiles: 4½" x 4½". Illustration ¼ scale

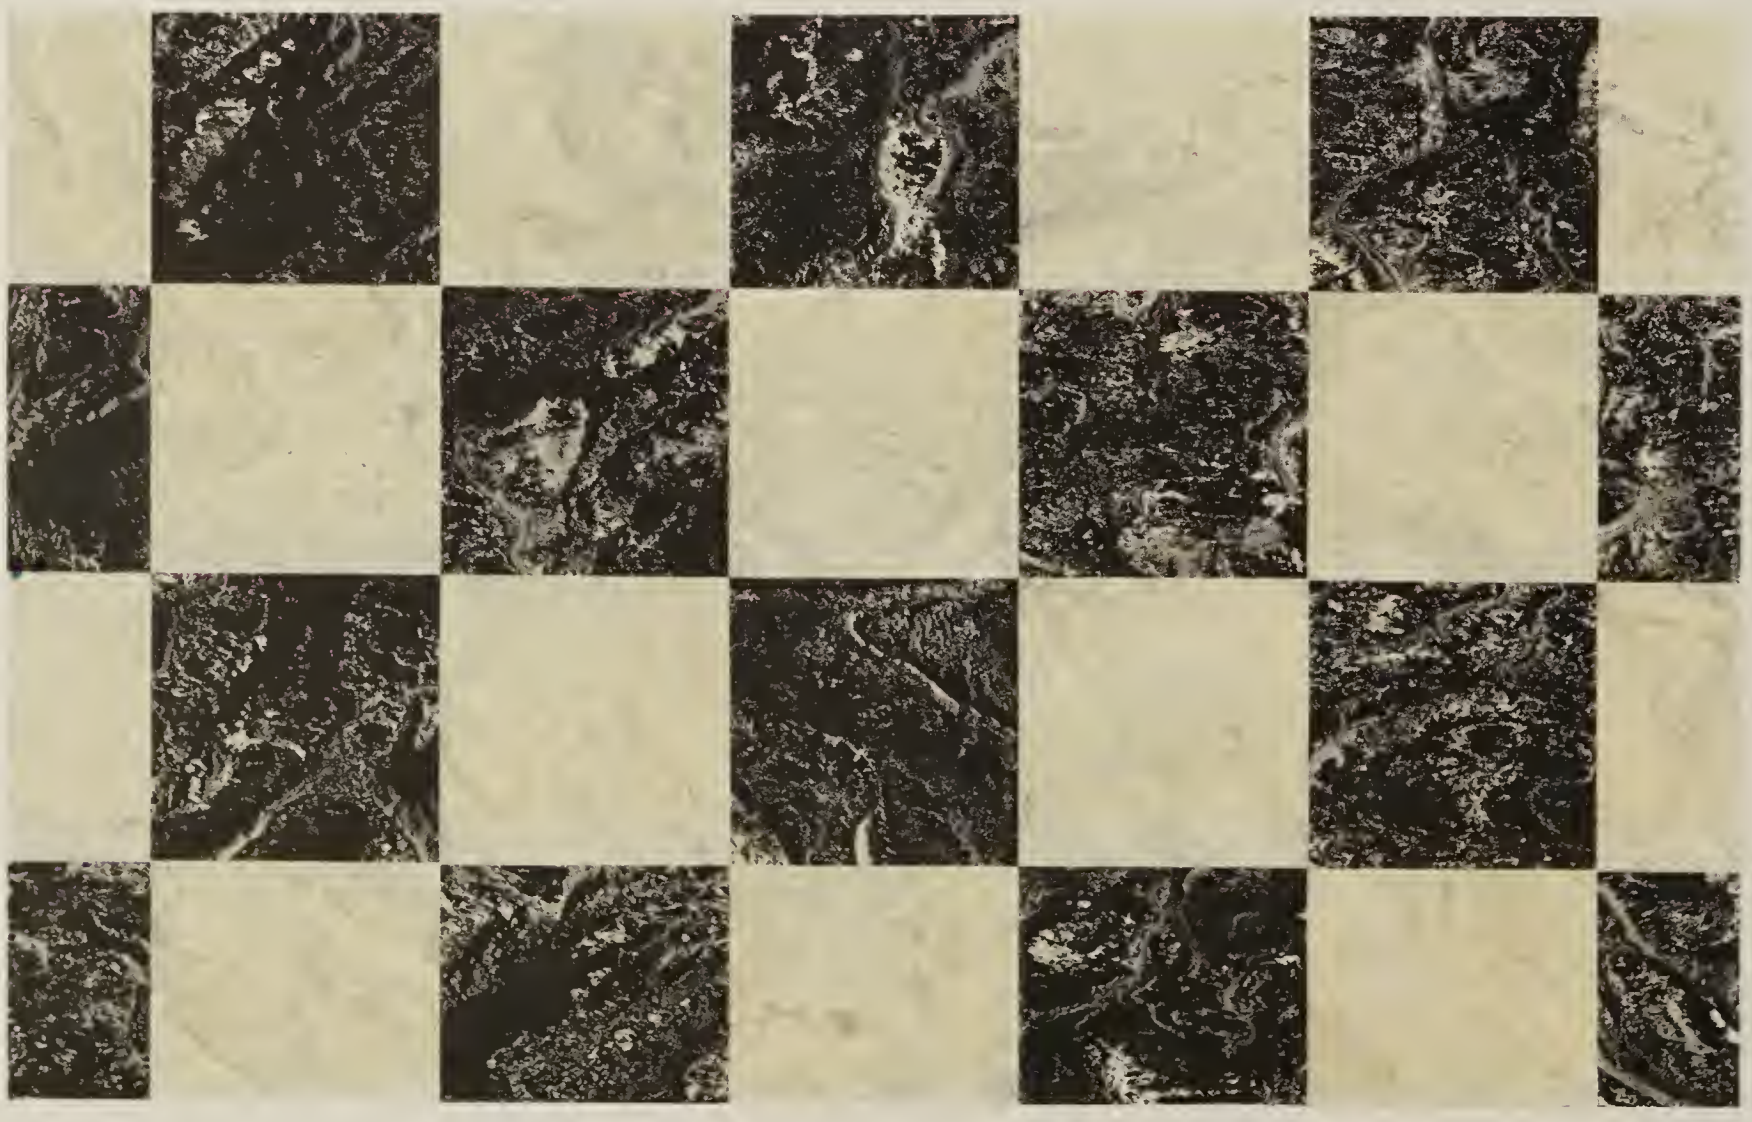

"Araby"—No. 9051 Code: Araby Actual size of tiles: 4½" x 4½". Illustration ¼ scale.

Nairn Linoleum – *Treadlite*

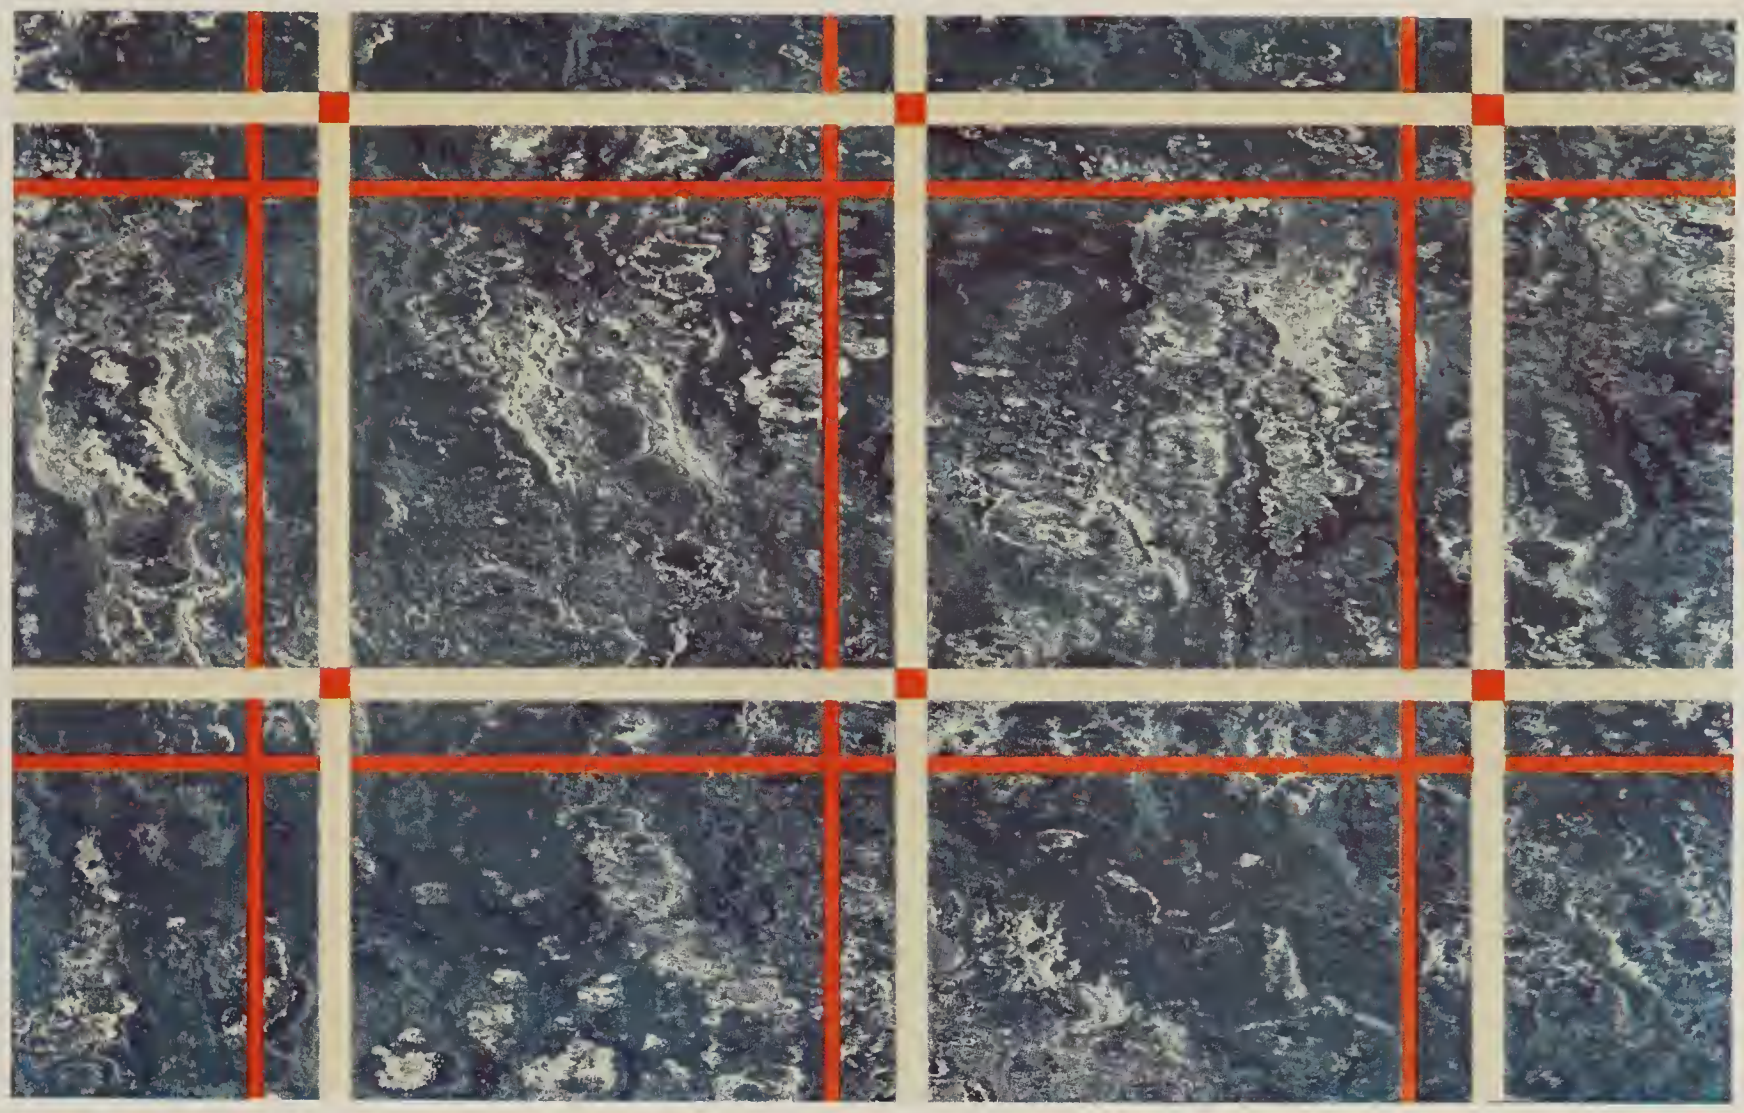

Illustration ¼ scale. Code: Glendening *"Glendening"*—No. 9052

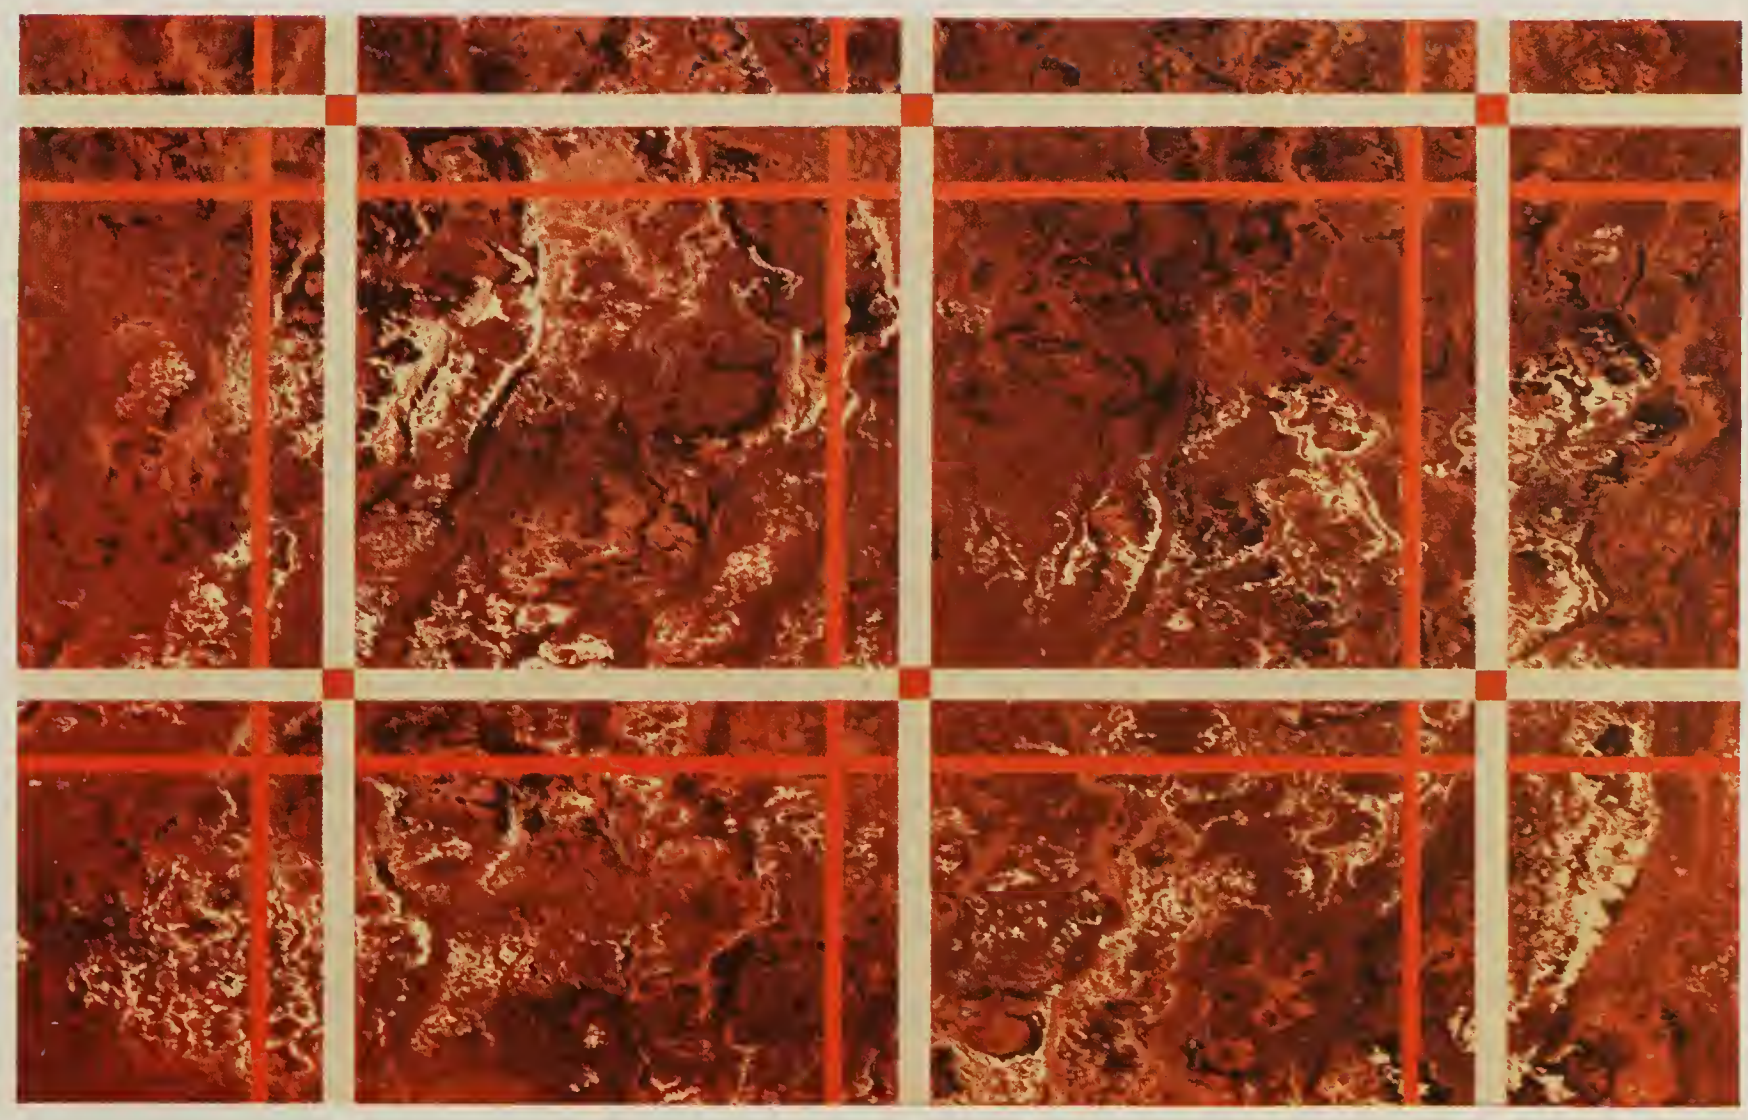

Illustration ¼ scale. Code: Waverly *"Waverly"*—No. 9053

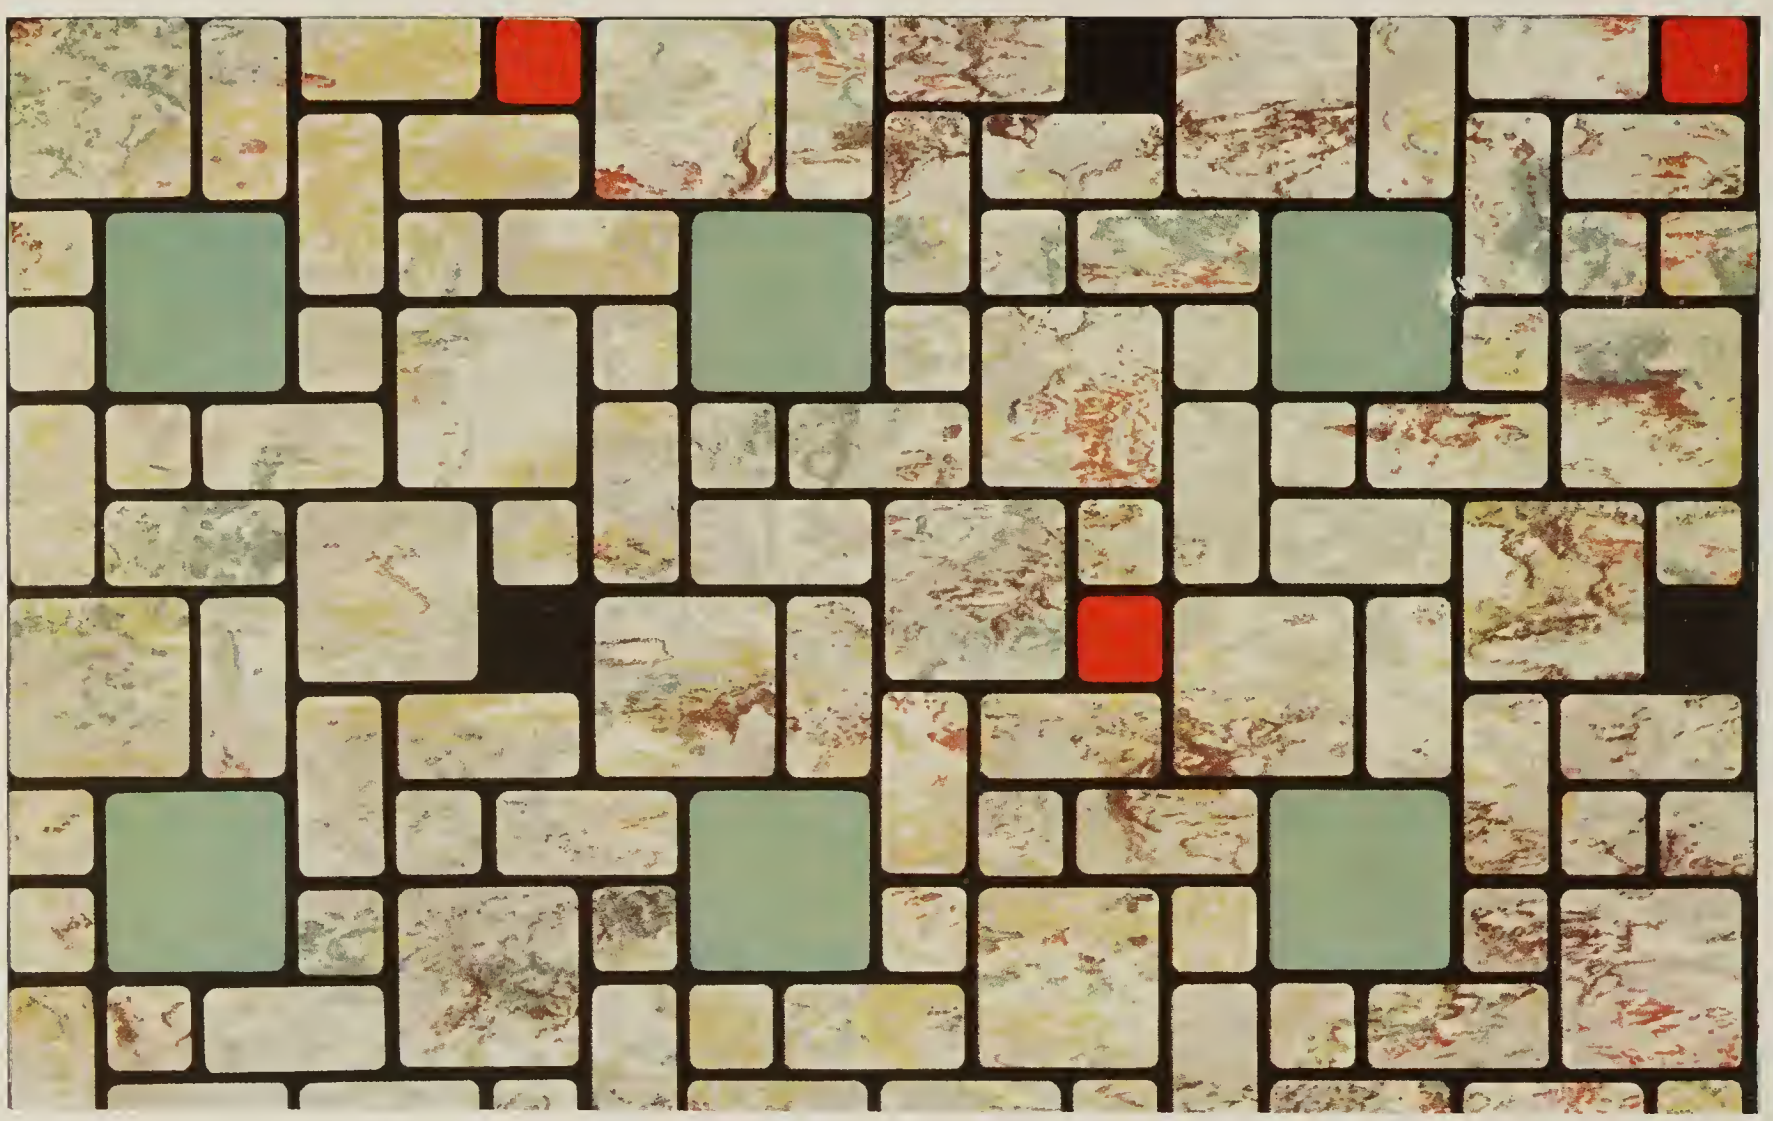

"Windsor"—No. 9060 Code: Windsor Illustration ¼ scale.

"Clinton"—No. 9080 Code: Clinton Illustration ¼ scale.

Illustration ¼ scale. Code: Mojave *"Mojave"*—No. 9081

Illustration ¼ scale. Code: Dresden *"Dresden"*—No. 9082

"Sussex"—No. 9085 Code: Sussex Illustration ¼ scale.

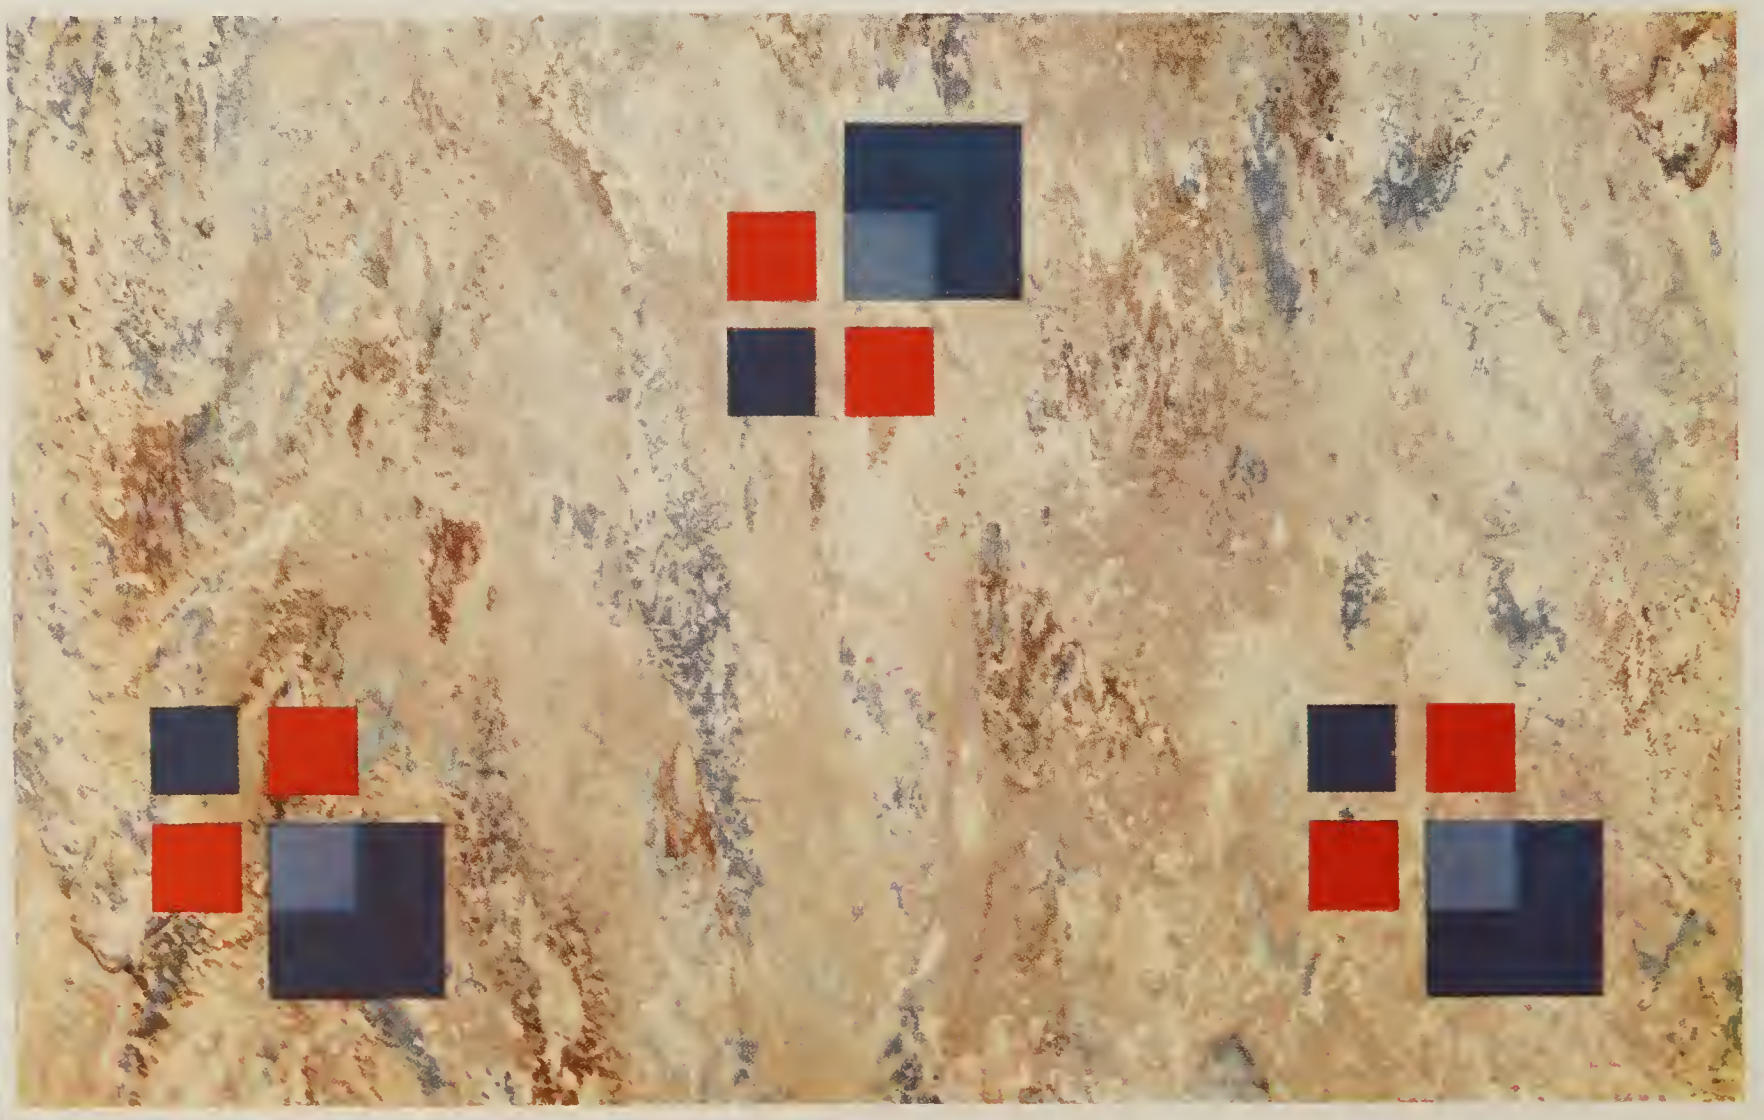

"Cheshire"—No. 9086 Code: Cheshire Illustration ¼ scale.

Nairn Linoleum – *Treadlite*

Illustration ¼ scale. Code: Taunton *"Taunton"* —No. 9087

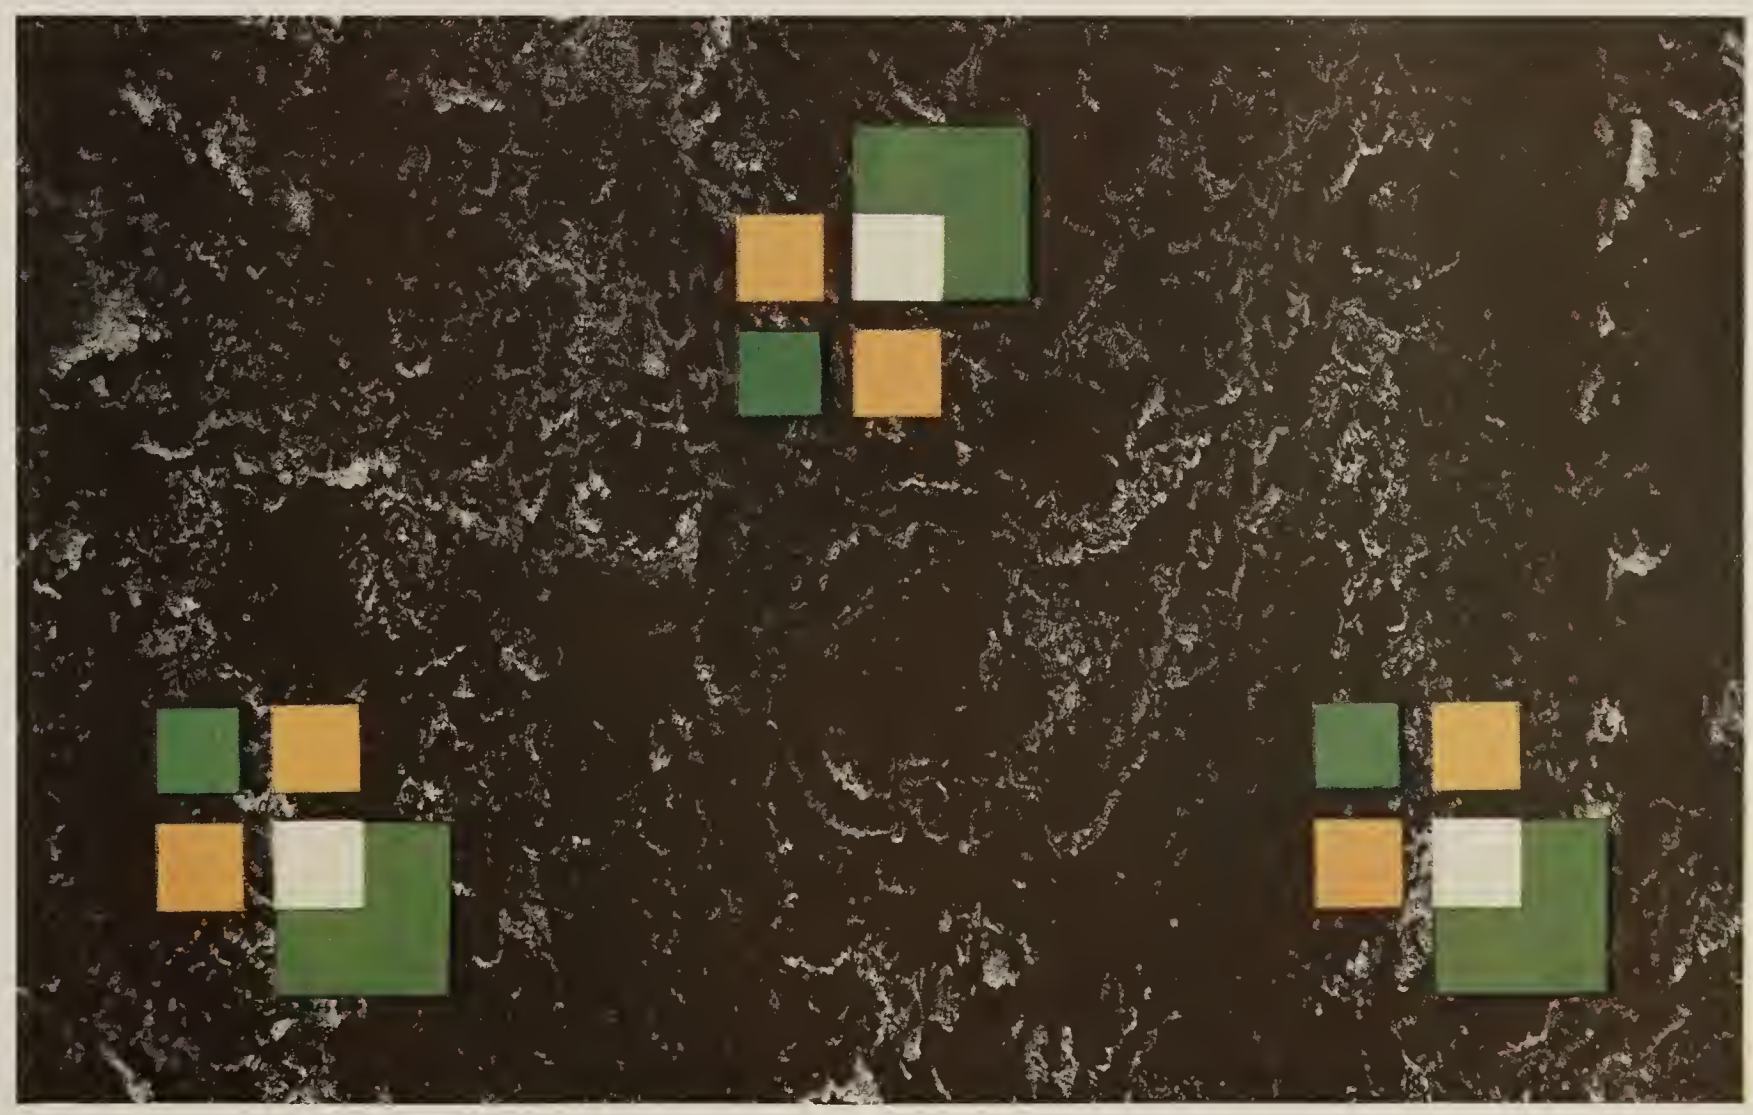

Illustration ¼ scale. Code: Doncaster *"Doncaster"* —No. 9088

"Monmouth"—No. 9089 Code: Monmouth Actual size of tiles: 9″ x 9″. Illustration ¼ scale.

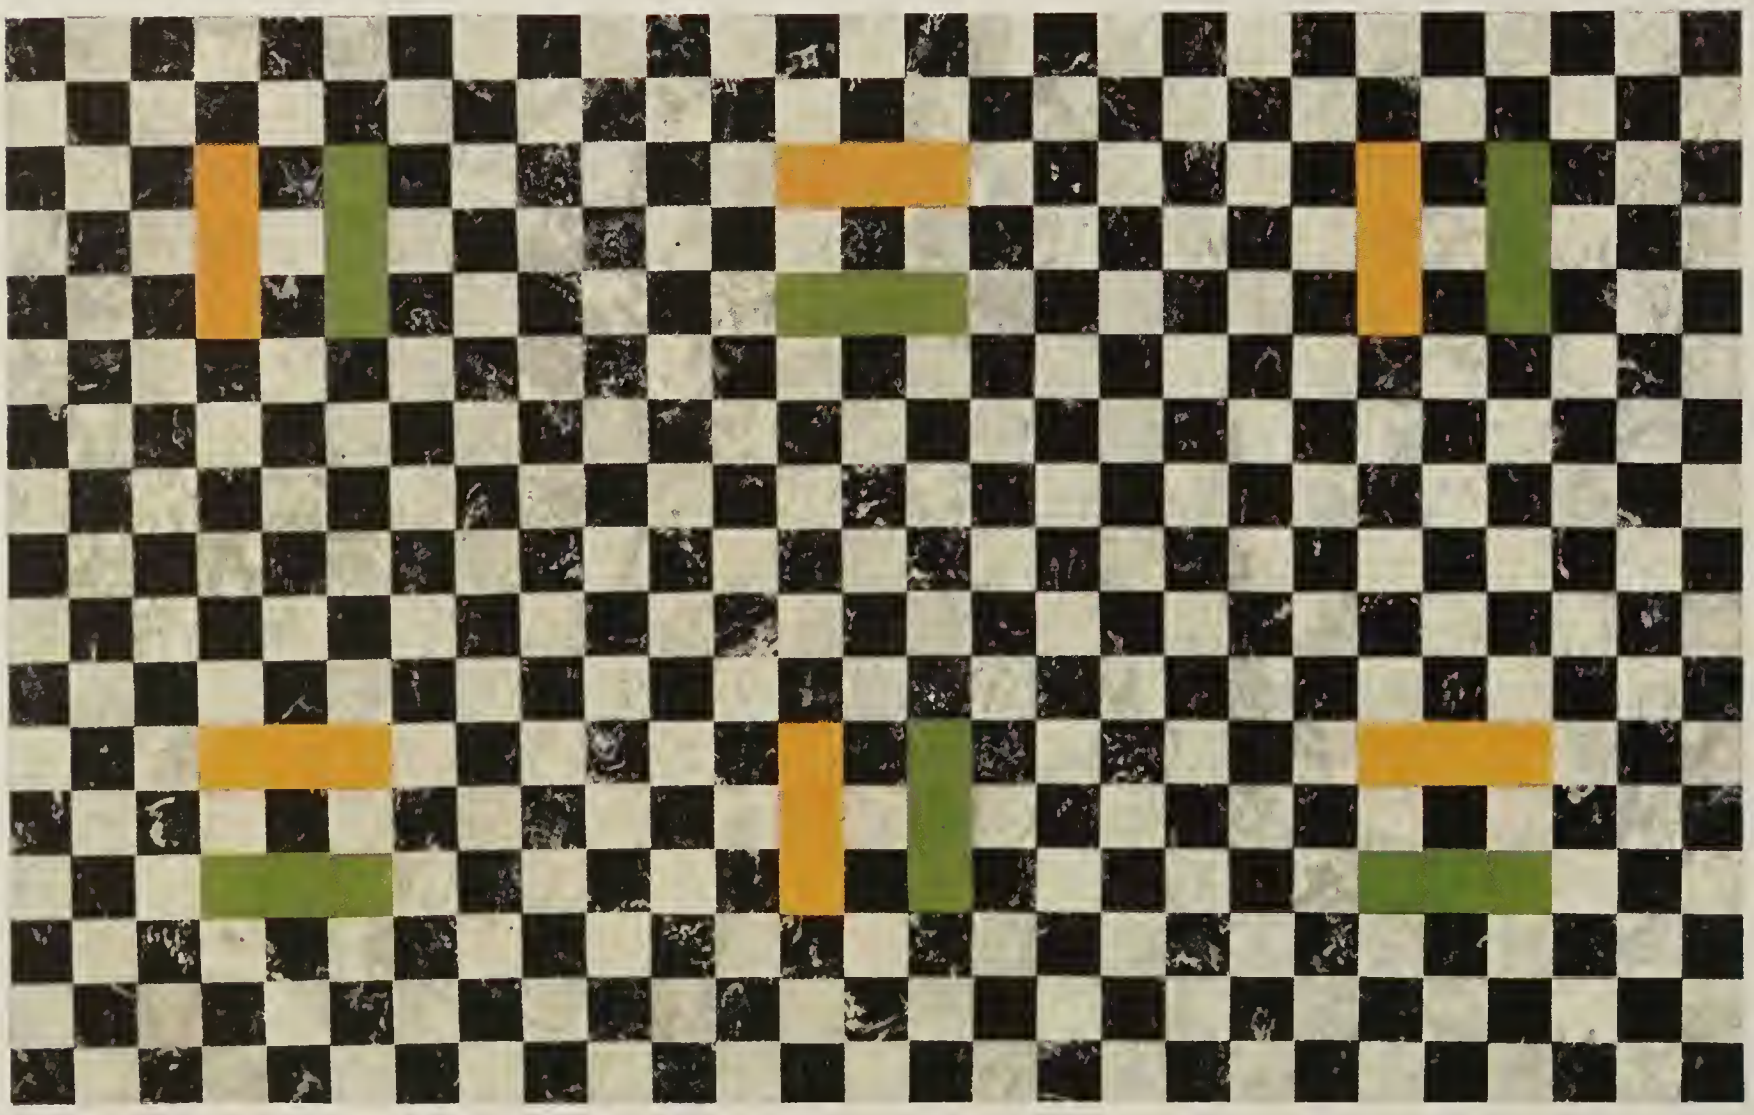

"Swansea"—No. 9090 Code: Swansea Actual size of square units: 1″. Illustration ¼ scale.

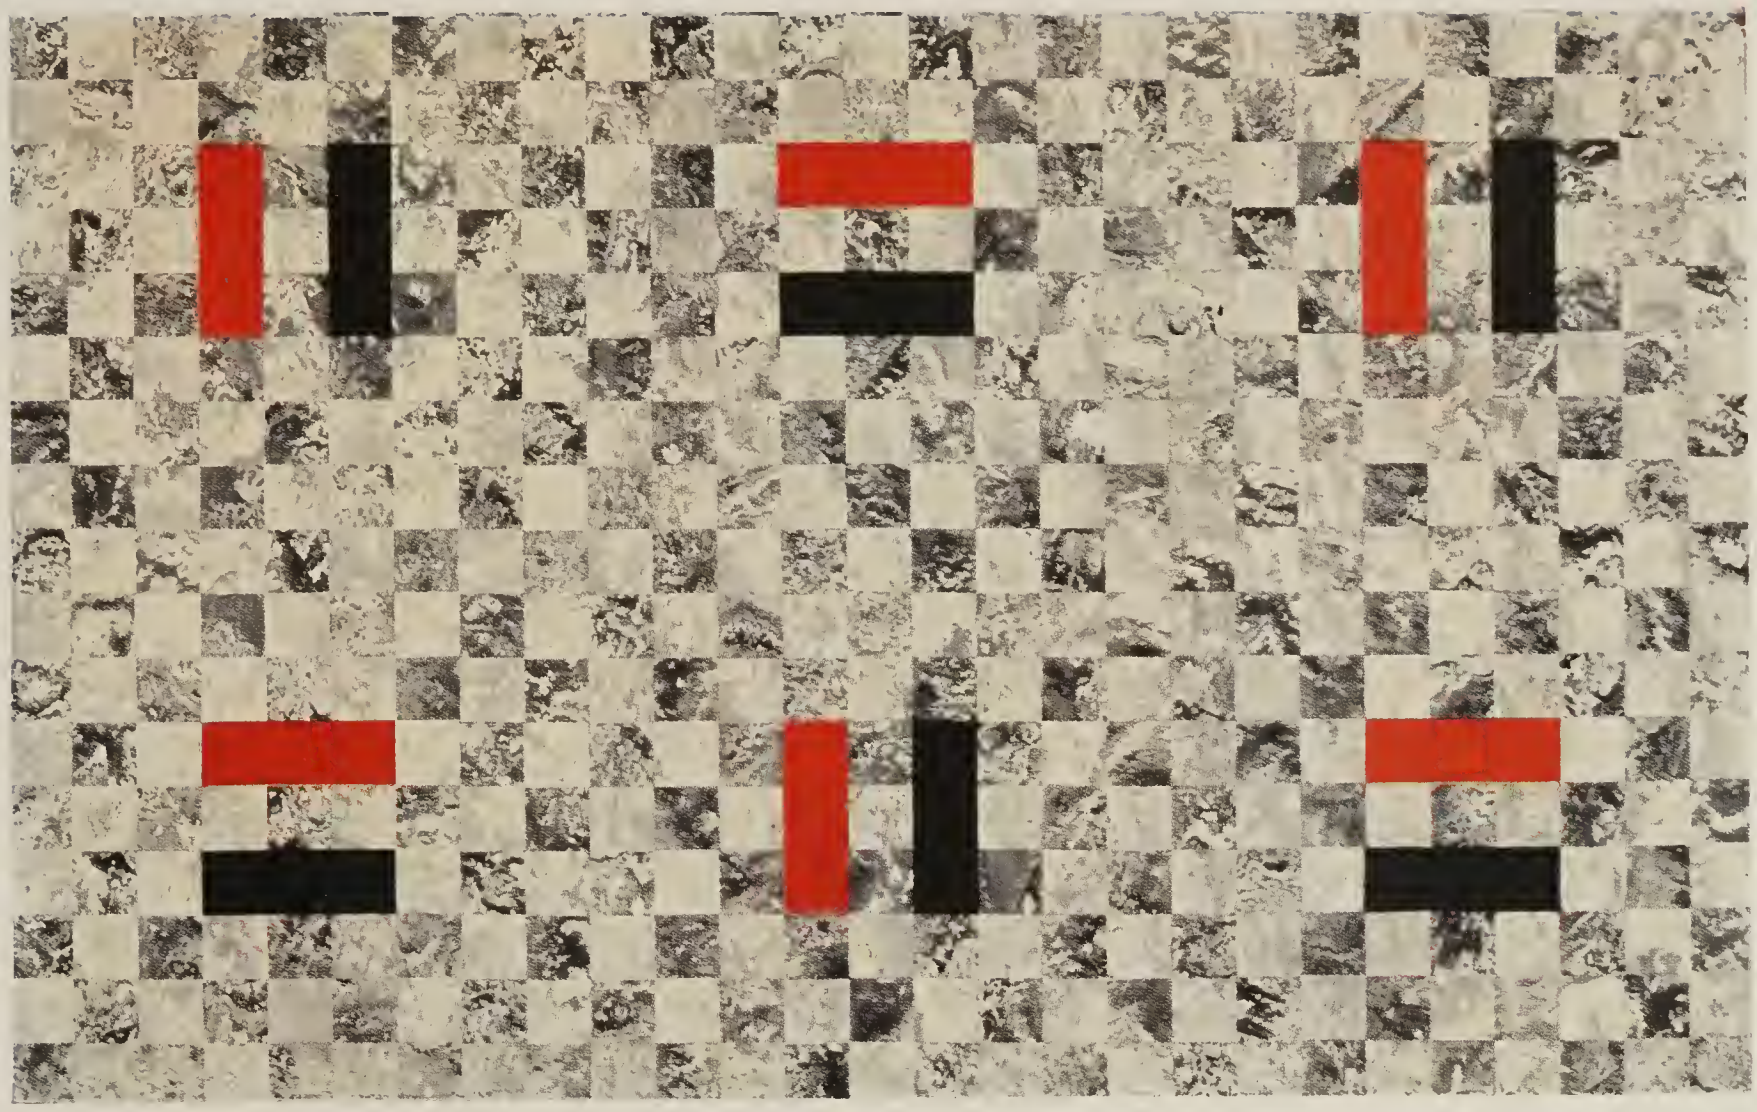

Actual size of square units: 1″. Illustration ¼ scale. Code: Milburn

"Milburn" —No. 9091

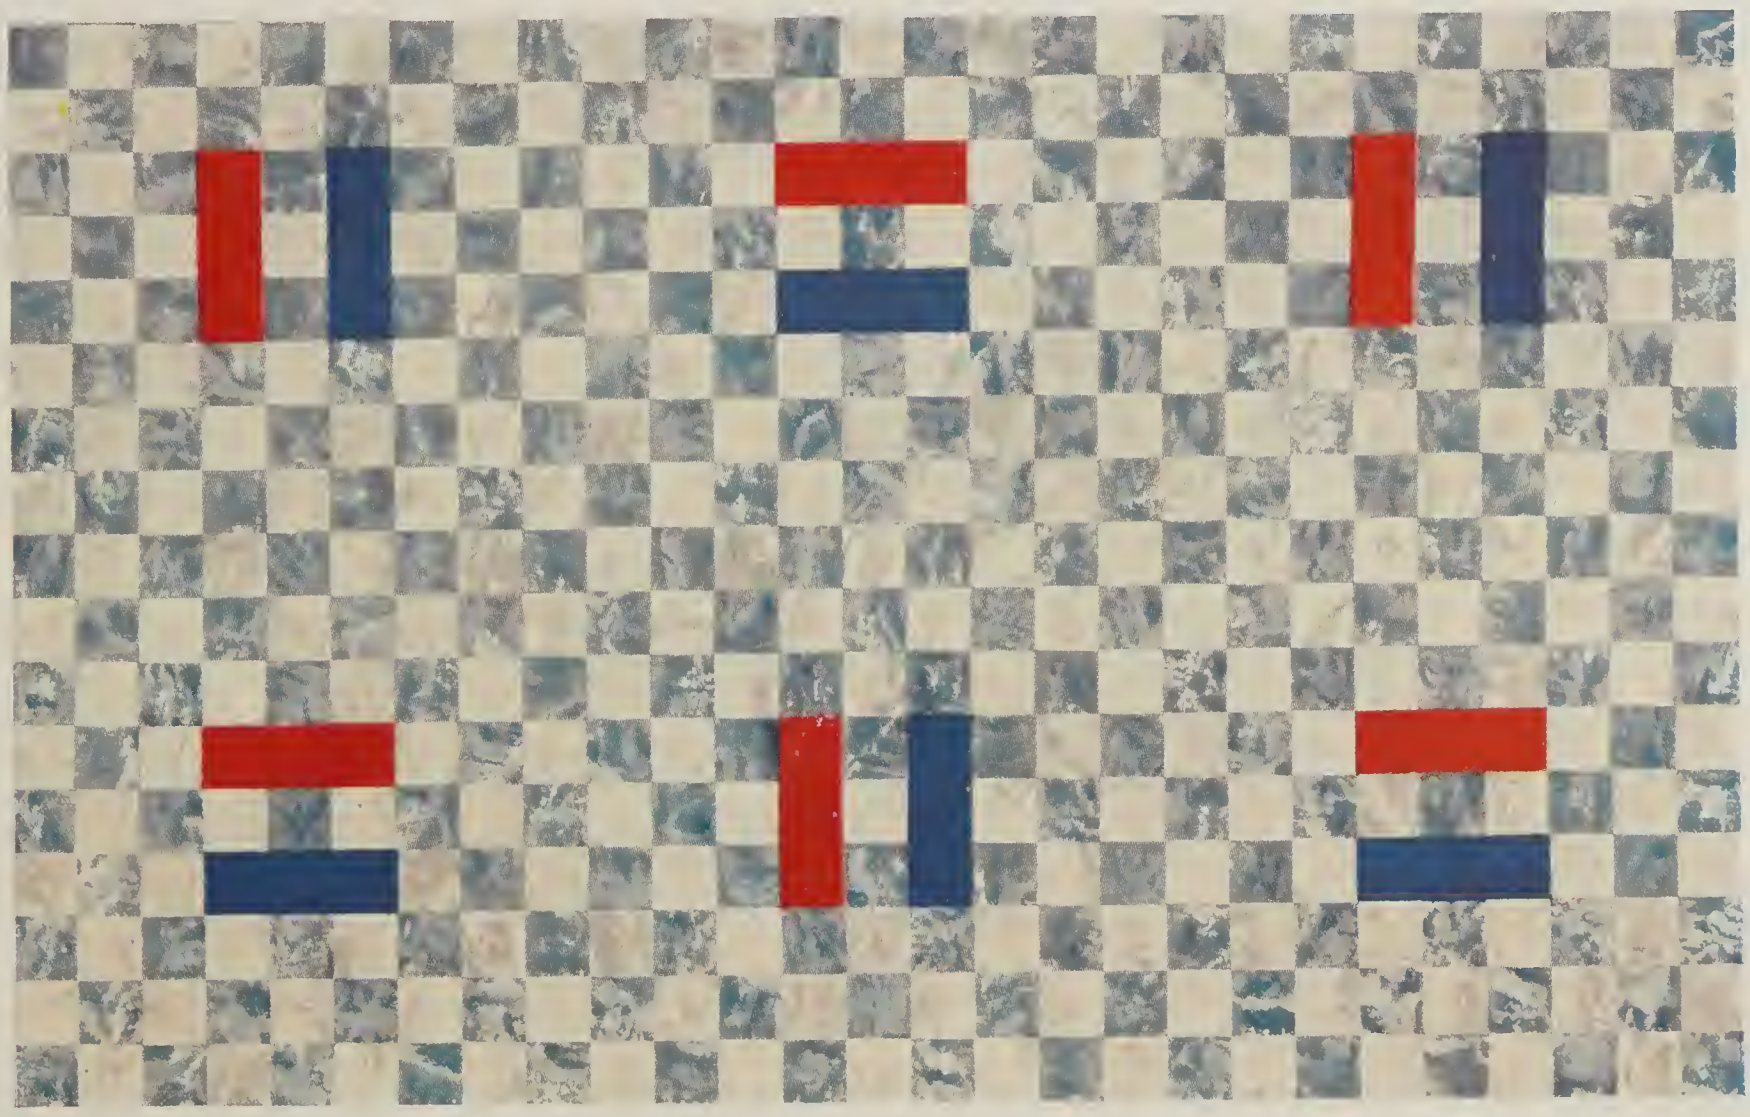

Actual size of square units: 1″. Illustration ¼ scale. Code: Merrick

"Merrick" —No. 9092

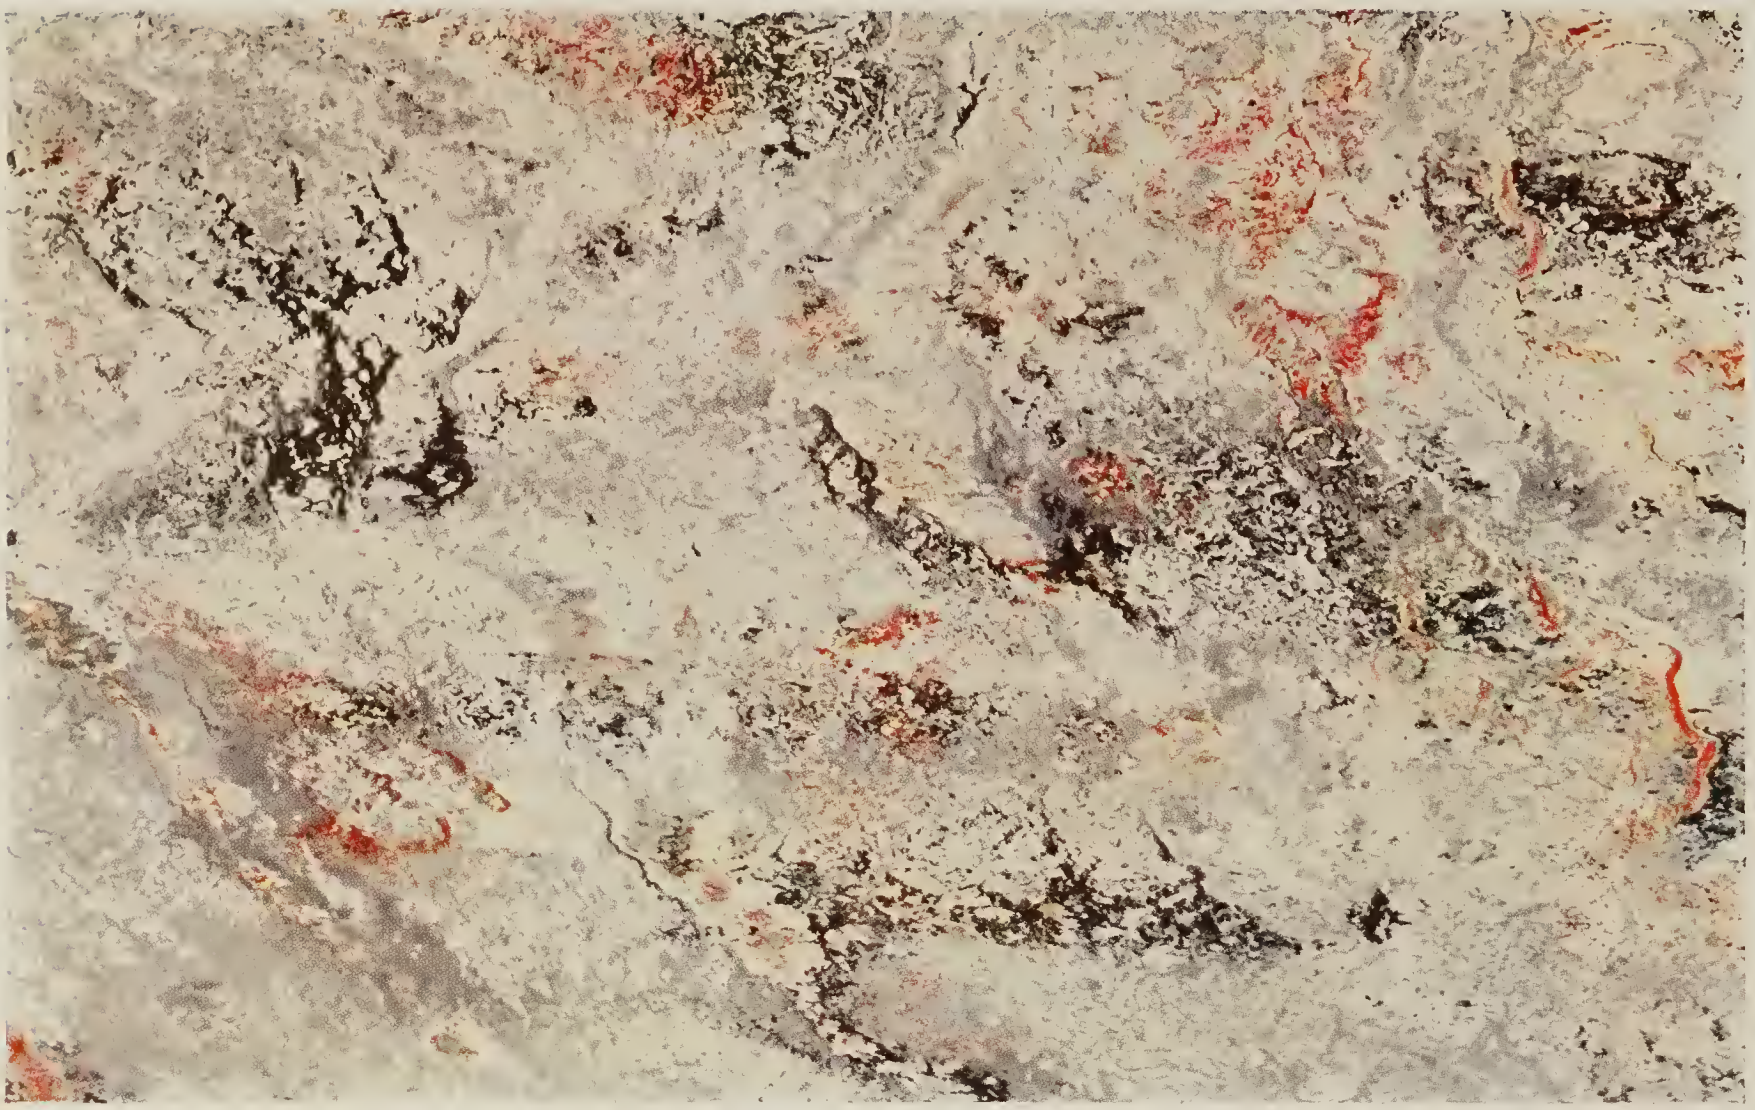

"Trenton"—No. 9106 Code: Trenton Illustration ¼ scale.

"Touraine"—No. 9107 Code: Touraine Illustration ¼ scale.

Nairn Linoleum – *Treadlite*

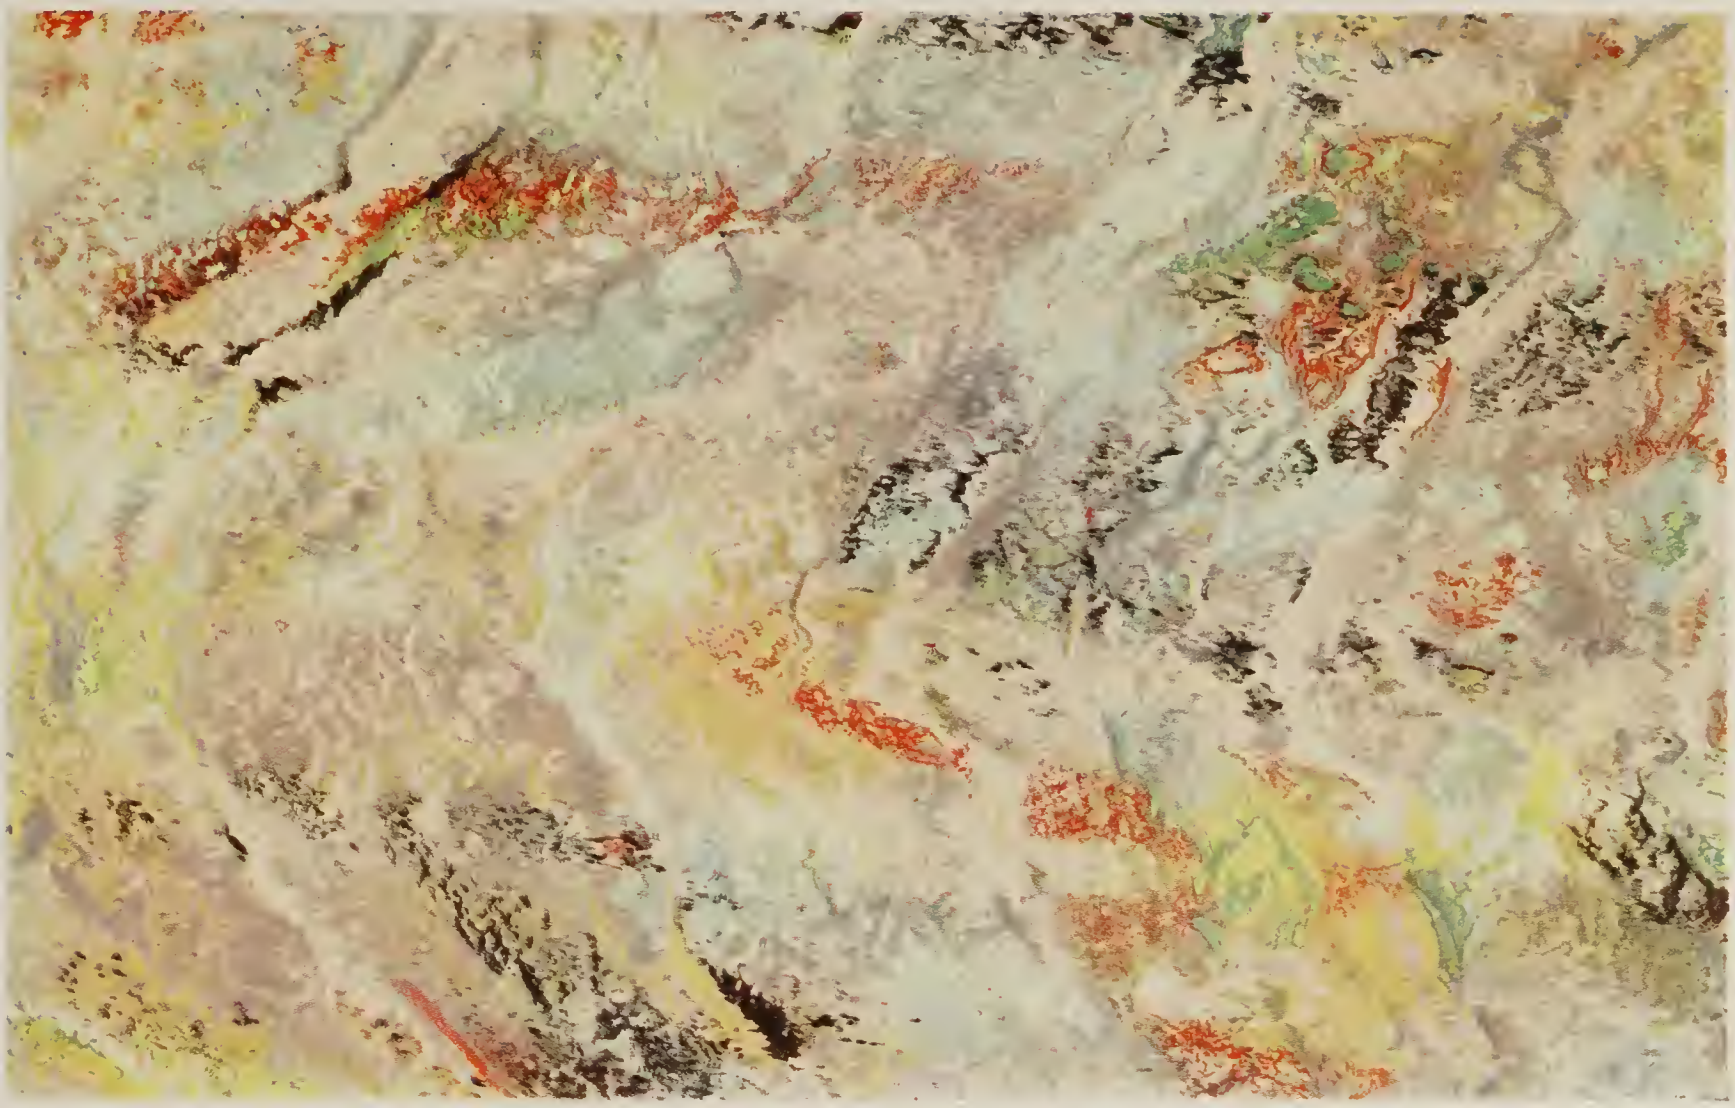

Illustration ¼ scale. Code: Navajo *"Navajo"*—No. 9108

Illustration ¼ scale. Code: Wiltshire *"Wiltshire"*—No. 9109

"Norfolk"—No. 9110 Code: Norfolk Illustration ¼ scale.

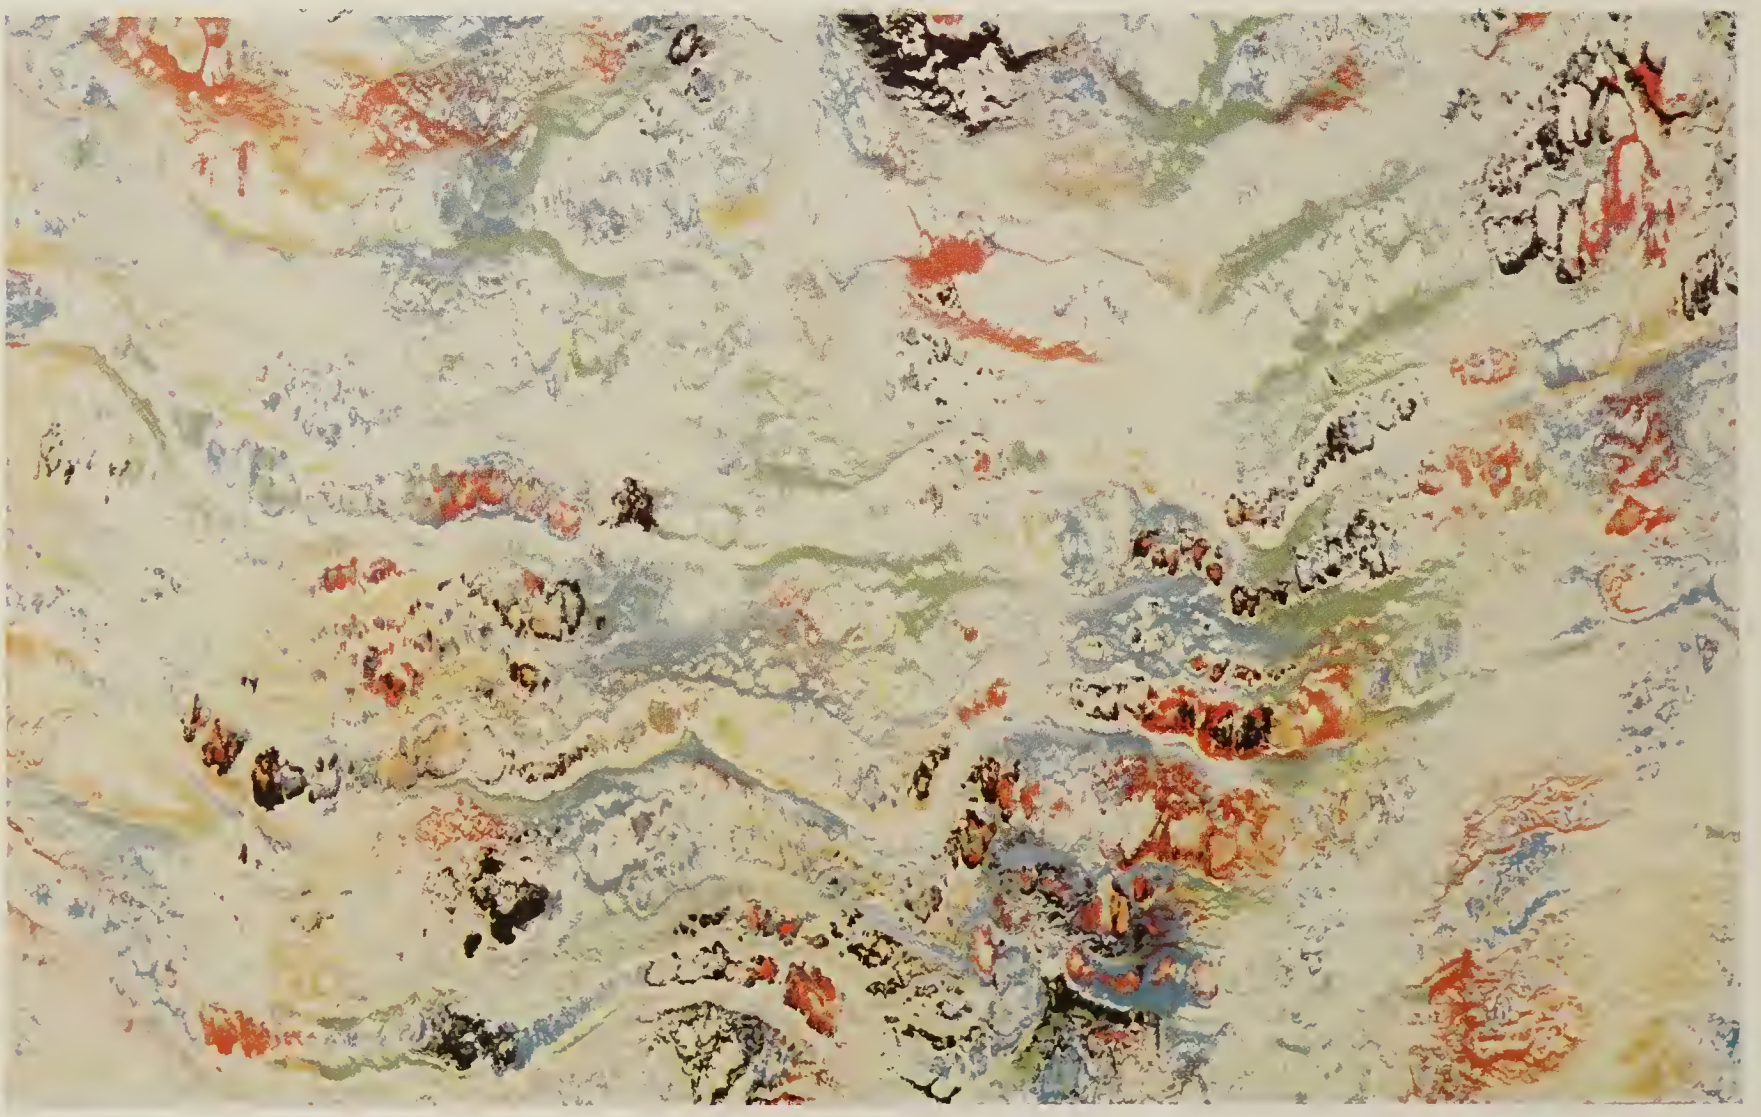

"Somerset"—No. 9111 Code: Somerset Illustration ¼ scale.

Nairn Linoleum—*Sealex Linoleum Tile*

GENERAL INFORMATION

DESCRIPTION: Distinctive floor designs are readily achieved with Sealex Linoleum Tile. Obtainable in 11 plain colors, 6 Jaspé patterns and 10 marbleized effects, Sealex Linoleum Tile offers numerous decorative possibilities through the combination of two or more colors in tiles of various shapes and sizes.

USES: Durable, resilient, easy-to-clean and economical to maintain, Sealex Linoleum Tile is suitable for the creation of individual decorative effects in such areas as:

CORRIDORS	SALES ROOMS	PRIVATE OFFICES
COURT ROOMS	ASSEMBLY HALLS	CLUBS
AISLES	PUBLIC BUILDINGS	

WEIGHT AND SIZES:

Sealex Linoleum Tile is manufactured in one weight or thickness; namely, 3/16 inch. It is made in standard sizes as follows:

4″ x 4″	6″ x 12″	¼″ x 9″
6″ x 6″	9″ x 18″	¼″ x 12″
9″ x 9″	12″ x 24″	¼″ x 36″
12″ x 12″	36″ x 36″	2″ x 36″
18″ x 36″	1½″ x 36″	18″ x 18″
1″ x 36″	¼″ x 4″	24″ x 24″
4″ x 8″	¼″ x 6″	24″ x 36″

Special sizes will be quoted upon for the assembling of special designs.

HOW INSTALLED:

Sealex Linoleum Tile is installed by authorized contractors of Bonded Floors, in accordance with the manufacturer's specifications. It is adaptable for use over concrete underfloors.

GUARANTY BOND:

When installed over concrete by authorized contractors of Bonded Floors, Sealex Linoleum Tile carries a Guaranty Bond issued by U. S. Fidelity & Guaranty Co.—guaranteeing workmanship and material for a period of five years.

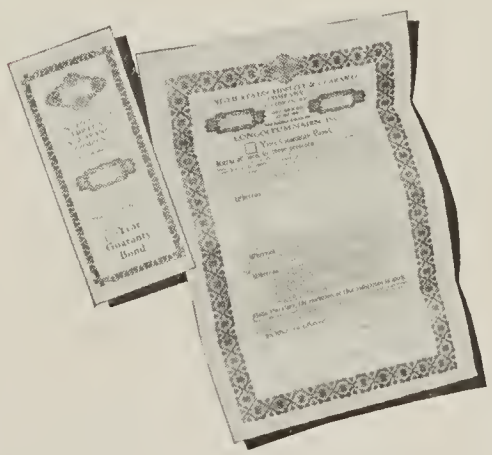

Nairn Linoleum—*Sealex Linoleum Tile*

MARBLE PATTERNS

The beautiful marble patterns made possible through the development of Nairn Sealex Veltone Linoleum have greatly extended the decorative versatility of Sealex Linoleum Tile. The varied effects the architect can design are innumerable.

The 10 marbleized patterns shown here and the 11 plain colors and six Jaspé designs illustrated on the following pages, demonstrate the great extent of the Sealex Linoleum Tile line.

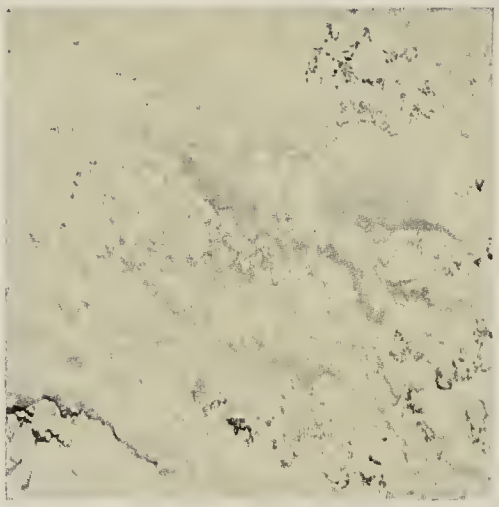

WHITE MOTTLED BLACK
Pattern No. 1180

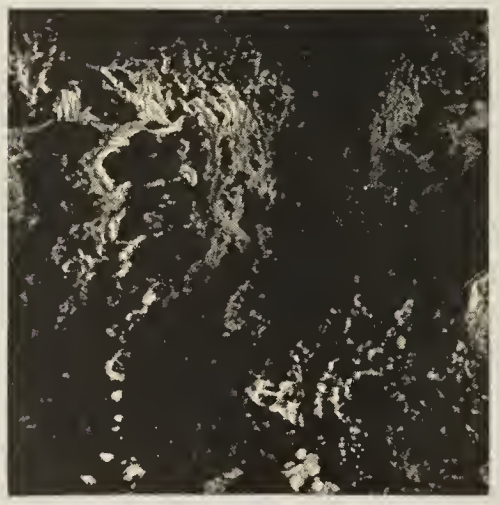

BLACK MOTTLED WHITE
Pattern No. 1159

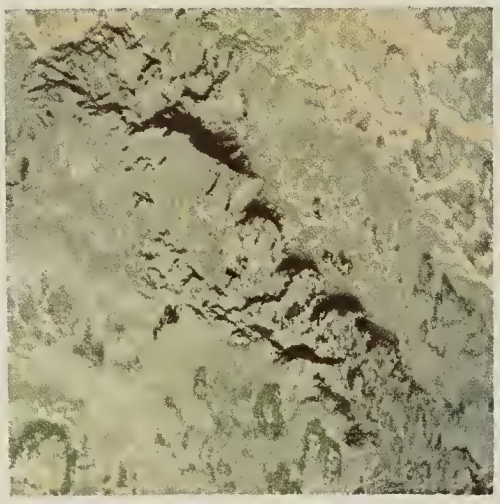

MARSH GREEN
Pattern No. 1141

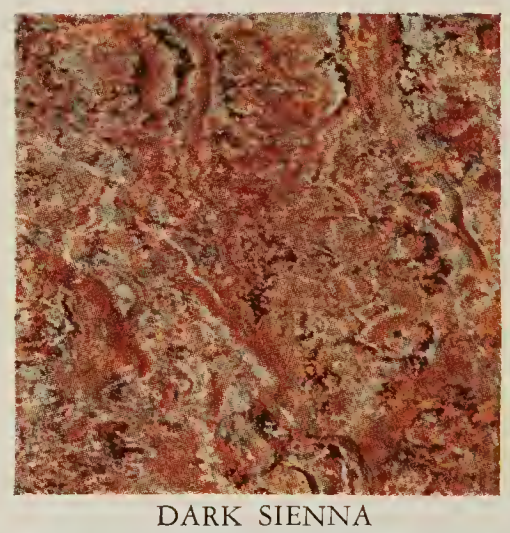

DARK SIENNA
Pattern No. 1168

TAN MOTTLED RED AND
BLACK—Pattern No. 1170

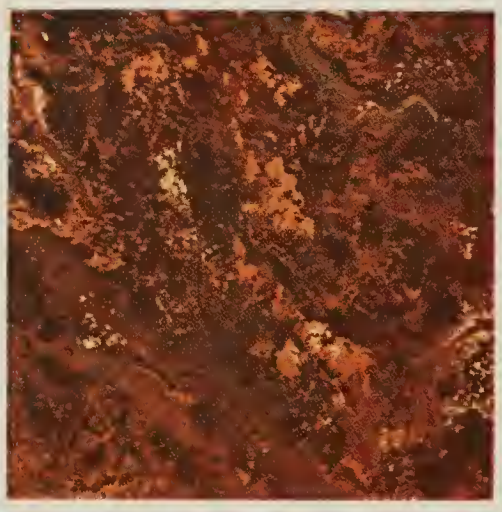

MAHOGANY RED
Pattern No. 1176

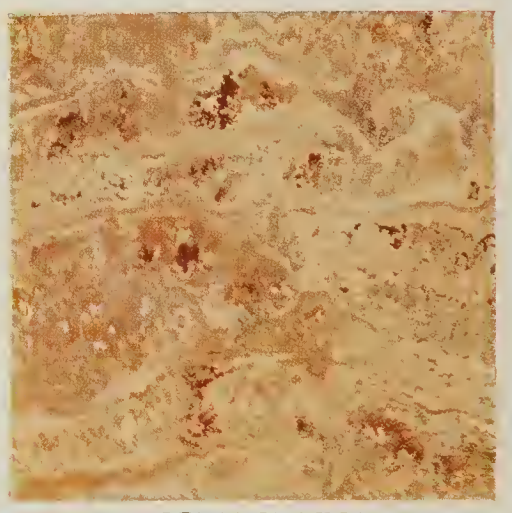

LIGHT SIENNA
Pattern No. 1178

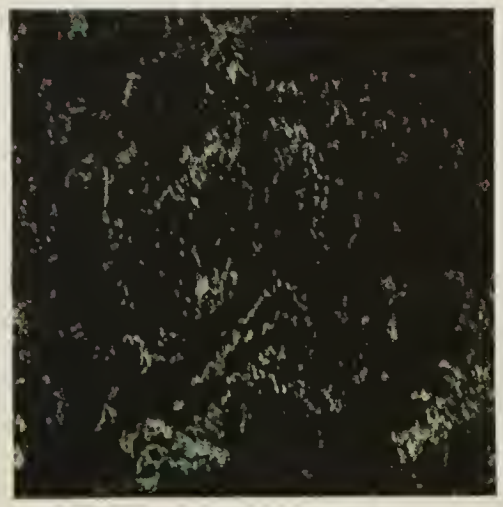

VERDE ANTIQUE
Pattern No. 1189

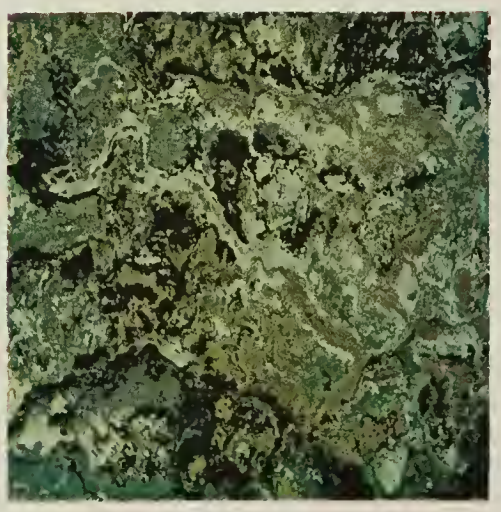

EVERGREEN
Pattern No. 1172

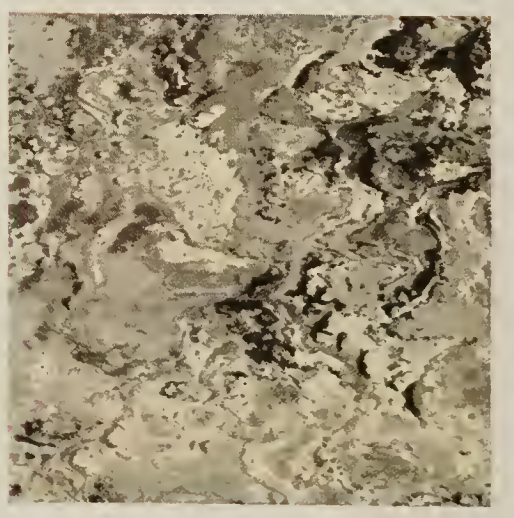

PAISLEYGRAY
Pattern No. 1174

Nairn Linoleum—*Sealex Linoleum Tile*

PLAIN COLORS

TERRA COTTA
No. 1002

IVORY WHITE
No. 10 3

CRAFT BROWN
No. 1000

COLONIAL BUFF
No. 1056

MOSS GREEN
No. 1001

FAWN GRAY
No. 1050

MAHOGANY BROWN
No. 1004

PACIFIC BLUE
No. 1014

SLATE GRAY
No. 1003

BLACK
No. 1005

STONE GRAY
No. 1015

Sealex Linoleum Tile patterns of Stone Gray, Slate Gray and Ivory White were used to execute the floor of the executive lobby shown on Page 121. The walls are decorated with Nairn Wall Linoleum in two marbleized patterns set off by golden panel moldings.

Nairn Linoleum—*Sealex Linoleum Tile*

JASPÉ COLORS

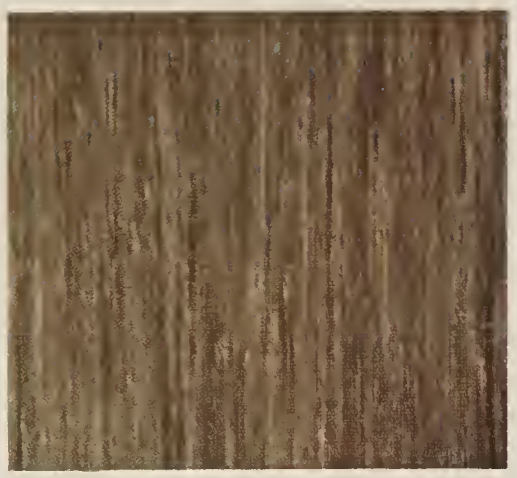

"TAUPE"—Pattern No. 1251

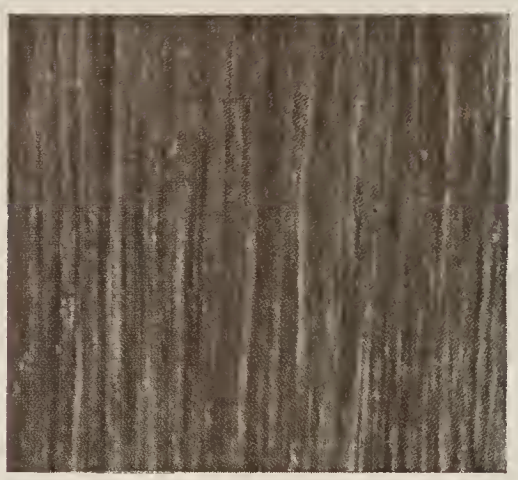

"DARK GRAY"—Pattern No. 1252

"LIGHT GRAY"—Pattern No. 1255

"DARK GREEN"—Pattern No. 1256

"BROWN"—Pattern No. 1254

"TAN"—Pattern No. 1253

The facility with which the architect may express the desired effect for a client with Sealex Linoleum Tile, Feature Strips and Insets is well illustrated in the subdued dignity of this Executive Office.

NAIRN SEALEX LINOLEUM TILE OVER CONCRETE UNDERFLOORS (*Both Plain and Marbleized Colors*)

On all concrete underfloors as indicated on plans and/or as called for in the specifications, furnish and install Sealex Linoleum Tile.

MATERIALS

Tile: The tile shall be full $\frac{3}{16}$ inch thick of..... ..... and..... ..... colors, patterns..... and.....as manufactured by Congoleum-Nairn Inc., and known as Sealex Linoleum Tile.

Adhesive: Adhesive for securing the tile to the cement underfloors shall be an approved material as manufactured by Congoleum-Nairn Inc., known as Nairn Green Label Paste.

PREPARATION OF UNDERFLOORS

The concrete underfloor shall be furnished to the Sealex Linoleum Tile contractor broom-clean, and free from moisture. The surface shall be an even trowelled cement finish. Where standard joint construction is used, the joints shall be filled in by the tile contractor with plaster of Paris or other suitable quick-setting plaster material so that an even surface will be formed over the entire area.

APPLICATION OF MATERIALS

1. The pattern as selected by the architect and as specified on the drawing shall be laid out to fit the room area. The border or first rows of tile at walls shall be scribed to fit exactly and so that the exposed edges form the proper lines for the lay-out of the field area.
2. The area should be spread with the cement immediately ahead of the tile and each tile embedded into the cement and fitted snugly against preceding tiles.
3. After the area has been thus covered with the tile in the proper design as specified, the surface shall be rolled thoroughly with a linoleum roller weighing not less than ten pounds per inch of contact.

CLEANING OF FLOORS

After application, the surface of the tile shall be thoroughly cleaned with kerosene, removing all spots of adhesive and other dirt. The floors shall then be left broom-clean and ready for use.

Where specified and called for, one or two coats of Nairn Self-Polishing Wax shall be applied to the surface of the tile after the cleaning operation.

BASE TREATMENT

Where desired and specified, there shall be installed Nairn Sealex Linoleum Cove Base of..... inches height and.....color. This base will be applied before the body of the floor, and secured to the vertical walls with brads. For this purpose, nailing strips or ground shall be provided by other contractors at a height of ½ inch less than the base height. Where such base is specified and installed, the tile shall be scribed to fit to this base, just as specified for fitting to vertical walls, and seams at this point shall also be weighted with sand bags to secure proper adhesion.

GENERAL CONDITIONS

Sealex Linoleum Tile shall be laid in a room where the temperature is not less than 68° Fahrenheit. All tile shall be maintained at this temperature at least 24 hours prior to application.

BRIEF SPECIFICATIONS

On all concrete underfloors as indicated on plans and/or as called for in the specifications apply Sealex Linoleum Tile.....and..... colors, $\frac{3}{16}$ inch thick in accordance with the manufacturers' specifications.

GUARANTEE

The Sealex Linoleum Tile contractor shall furnish where required a guarantee against defects in material or workmanship for a period of five years from the date of completion. This guarantee shall take the form of a Guaranty Bond in the full amount of the contract, issued by a reliable insurance company.

Under this guarantee, the contractor shall upon receipt (within period of guarantee) of written notice from the owner, make at his own (the contractor's) expense, any repairs that become necessary, except repairs or injury for any cause other than the ordinary wear and tear.

SPECIFY
Nairn Linoleum

CAMERA HIGHLIGHTS in the world of NAIRN LINOLEUM

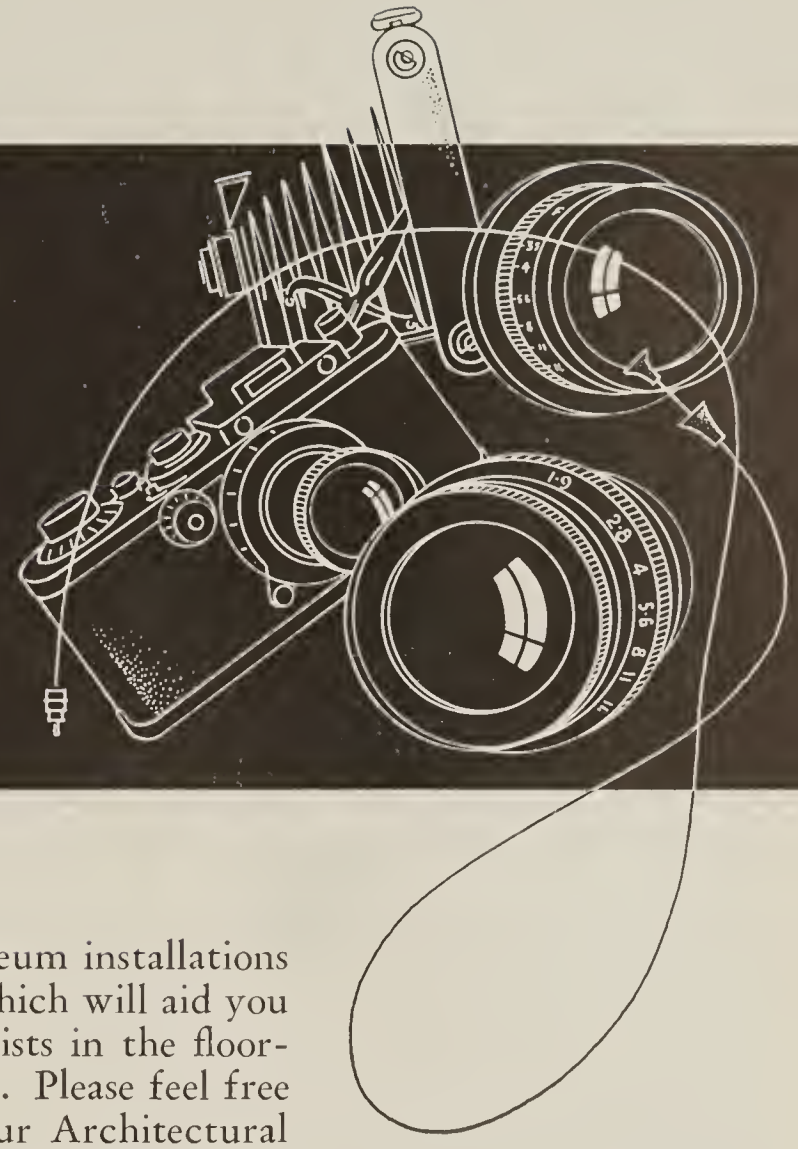

We present here the latest news of the day, in fine linoleum installations of all types. We hope you will find many suggestions which will aid you in your floor-covering problems. As recognized specialists in the floor-covering field we have built up vast files of case histories. Please feel free to take advantage of this information by addressing our Architectural Service Bureau, Congoleum-Nairn Inc., Kearny, N. J., at any time.

Why you should specify Nairn Linoleum

Evidence, service records, striking innovations, all these are the things without which leadership cannot be convincing.

We hope, by the presentation of these "camera highlights" to impress upon you our record of leadership . . . a record that has long been recognized by architects and owners.

Our leadership in color, beauty of design, style, durability and economy is the best argument we know for the specification of Nairn Linoleum.

Where you should specify Nairn Linoleum

Wherever a beautiful, quiet, comfortable, easy-to-clean floor is desired . . . one that will give the utmost in lasting economy—that's the place to specify Nairn Linoleum.

To mention a few examples, architects and owners have found Nairn Linoleum the perfect floor, in *every* respect, for schools, churches, libraries, public buildings, shops, stores, professional offices and private homes.

NAIRN SEALEX LINOLEUM
Stain-proof · Easily Cleaned
SATISFACTION GUARANTEED OR YOUR MONEY BACK

CONGOLEUM-NAIRN INC., KEARNY, NEW JERSEY

NAIRN LINOLEUM . . . for the *right* "First Impression"

INGENUITY in the creation of striking beauty is one of the chief tools of a good architect.

To meet the ever-increasing demands of resourceful architects, Nairn Linoleum offers many new and beautiful colors, ranging from deep, rich hues and brilliant tones, to delicate pastels.

Whether the effect is to be in broad, sweeping strokes, or delicate subtleties the architect will find exactly the right working medium in Nairn Linoleum of Sealex Veltone, Plain, Inlaid, Jaspé or Treadlite.

SPECIFY *Nairn Linoleum*

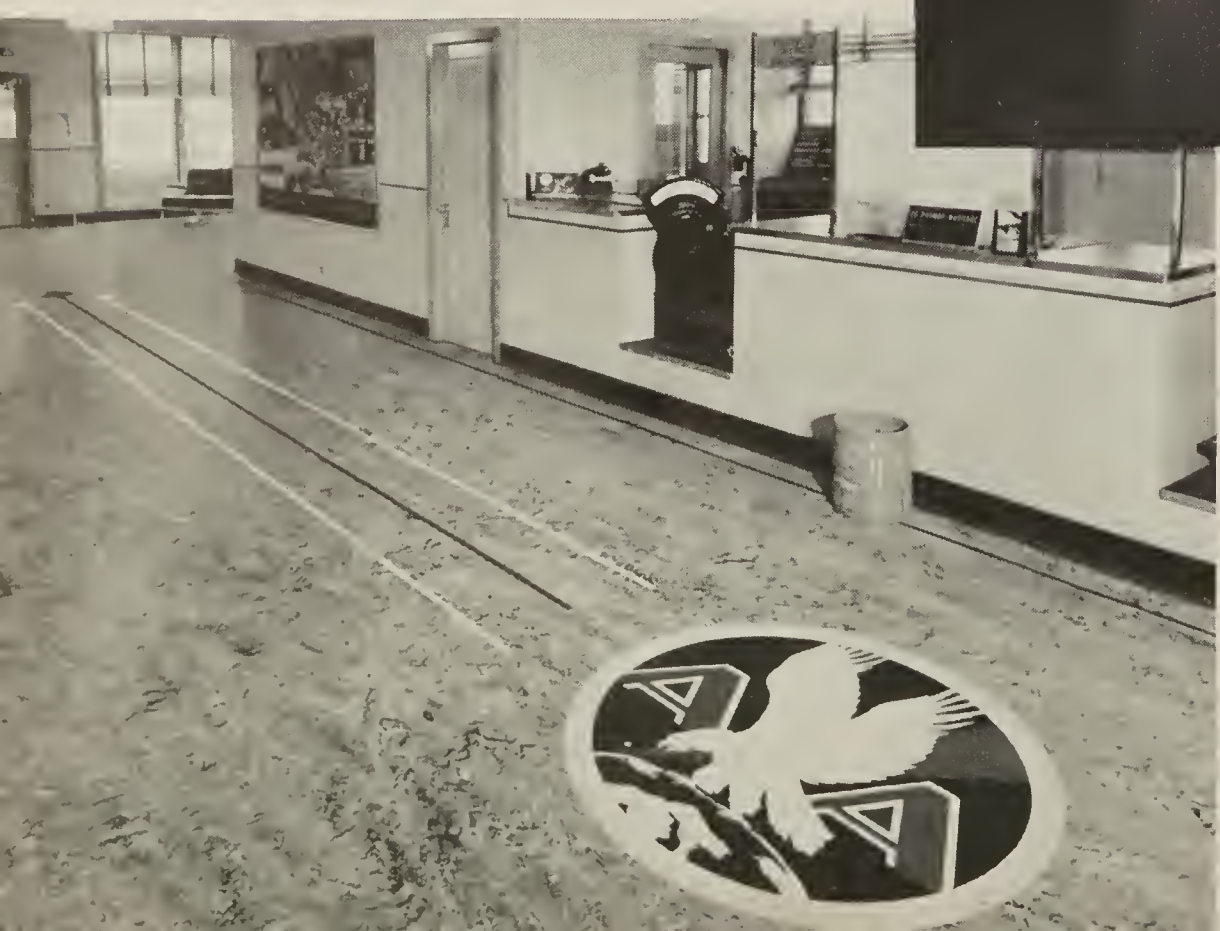

Streamlined Styling

Individual effects at moderate costs were made possible when Nairn Linoleum pioneered the new "Personal-ized Floors." With these easy-to-handle, ready-cut materials, architects have a working medium for unlimited decorative possibilities.

Use Nairn Linoleum for unusual effects, such as this dance floor in the Continental Club, Cleveland, Ohio.

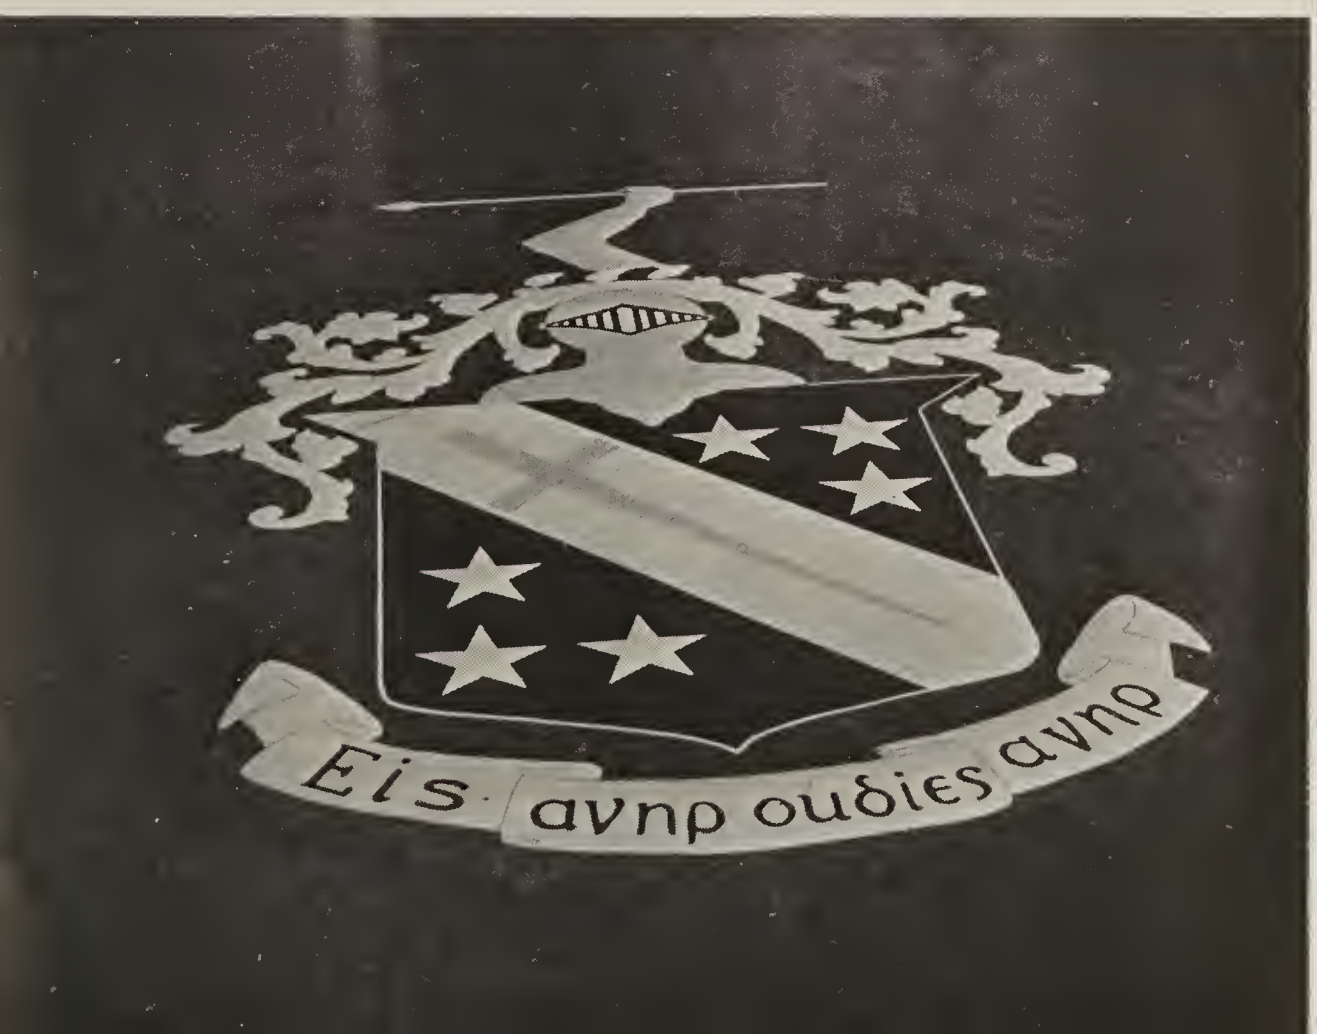

Flexible-adaptable

Give the imagination full sway. A skilled linoleum mechanic can cut and lay practically any shape and design with Nairn Linoleum. The crest of the Phi Delta Theta house at Southern Methodist University, Dallas, Texas, shown in the photo at left is an outstanding example of the unlimited scope where Nairn Linoleum is the medium of expression. As for colors—Nairn Sealex Plain and Veltone patterns offer one of today's widest and most complete ranges of tones and hues.

NAIRN LINOLEUM
. . . the *foot-easy* floor

The built-in resilience of all Nairn Linoleum absorbs the shock of pounding feet in school and hospital corridors, as well as in busy stores, ballrooms and offices. Nairn Linoleum is the foot-easy floor that *everyone* appreciates.

Every good business man knows the value of making his customers comfortable. What better way than to offer tired feet a broad, beautiful expanse of really *resilient* floors?

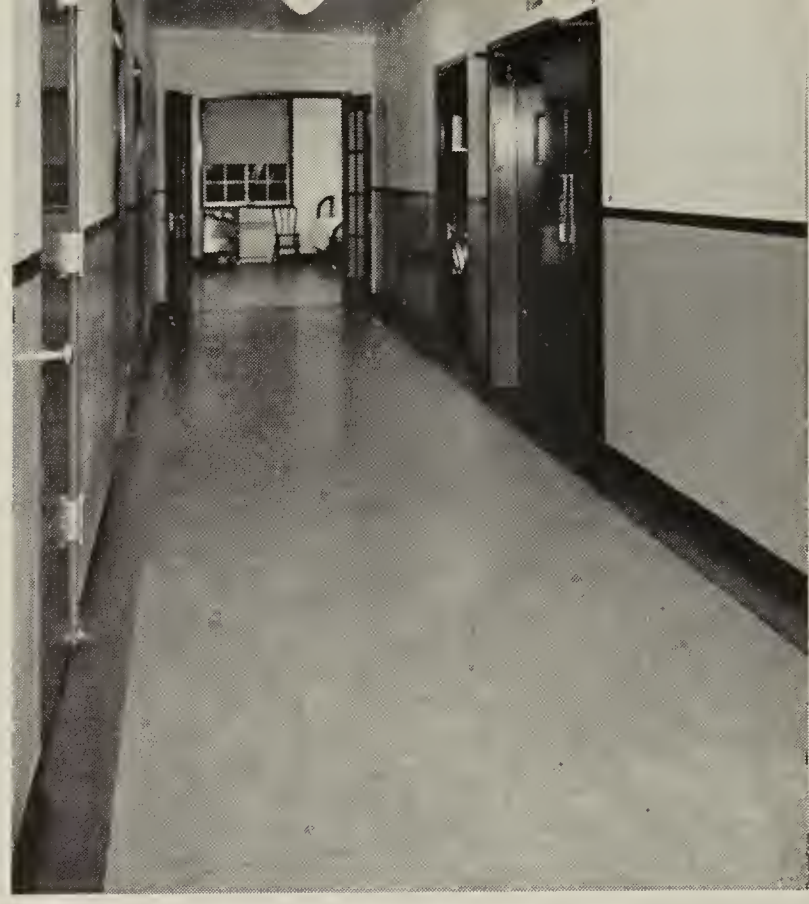

Nairn Linoleum—Sealex Veltone—brings foot comfort to the staff in this corridor of the Genesee County Home at Batavia, N.Y.

Gaiety, color, sparkle—or quiet, dignified beauty—all these expressions of the tone and character of a room are more easily and truthfully captured when the architect specifies Nairn Linoleum.

"Quietizing"

"Library Quiet" is a "must" in many public and institutional rooms. Nairn Linoleum, with its special cork content, answers this demand perfectly. The room illustrated is in the Ponca City Library, Ponca City, Oklahoma, with Sealex Linoleum Tile installed.

Stain-proof, easy-to-clean

"Hospital cleanliness" reaches perfection in Nairn Linoleum. The Nairn Linoleum process hermetically seals the microscopic surface pores. No hiding place for germs or dust. Unlike most other floors, there are no cracks or crevices.

SPECIFY *Nairn Linoleum*

At Left: The X-ray room at St. Louis Hospital, Berlin, N.H., gets a combination of dignified beauty and absolute cleanliness from this unusual Nairn Linoleum pattern of Sealex Veltone.

The ideal floor for work or play..

Whether it's a gay little game room or a vast expanse of business floors, the architect needs Nairn Linoleum, the material which will best meet his specifications.

Below: Clever designing with contrasting tones of Nairn Linoleum —Sealex Plain—helps make this kindergarten a cheerful room in the Northville Grade School at Northville, Michigan. (Photograph copyright by F. S. Lincoln, N.Y.C.)

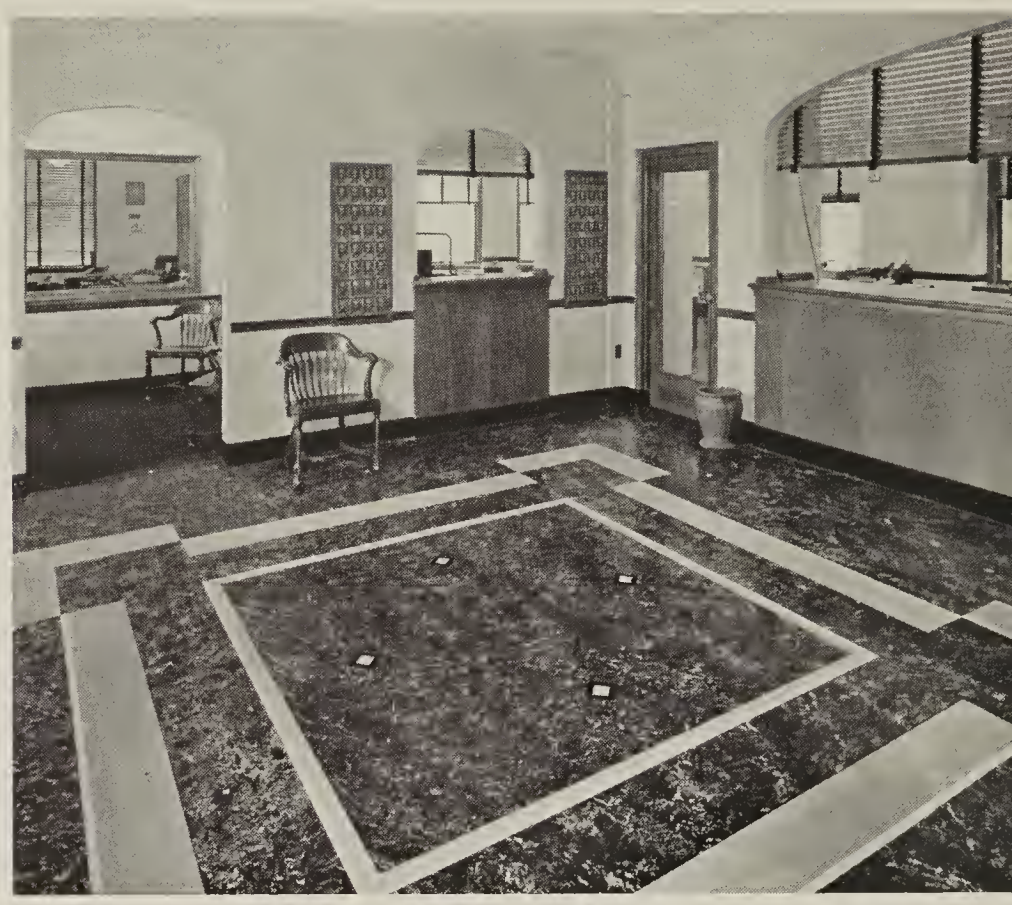

Above: The Boston office of the New York Life Insurance Company insures against floor troubles with Nairn Linoleum—Sealex Veltone —inset with a design of Nairn Sealex Plain.

Behind Nairn Linoleum is a tremendous expenditure of time, money and research in creating a range of colors and patterns to meet every imaginable floor-covering demand.

A strikingly marbleized Nairn Linoleum—Sealex Veltone pattern with contrasting border of Nairn Sealex Plain adds beauty to this Beech Nut Exhibit.

A particularly cozy and attractive game room, designed with Nairn Linoleum—Sealex Jaspé, Plain and Veltone.

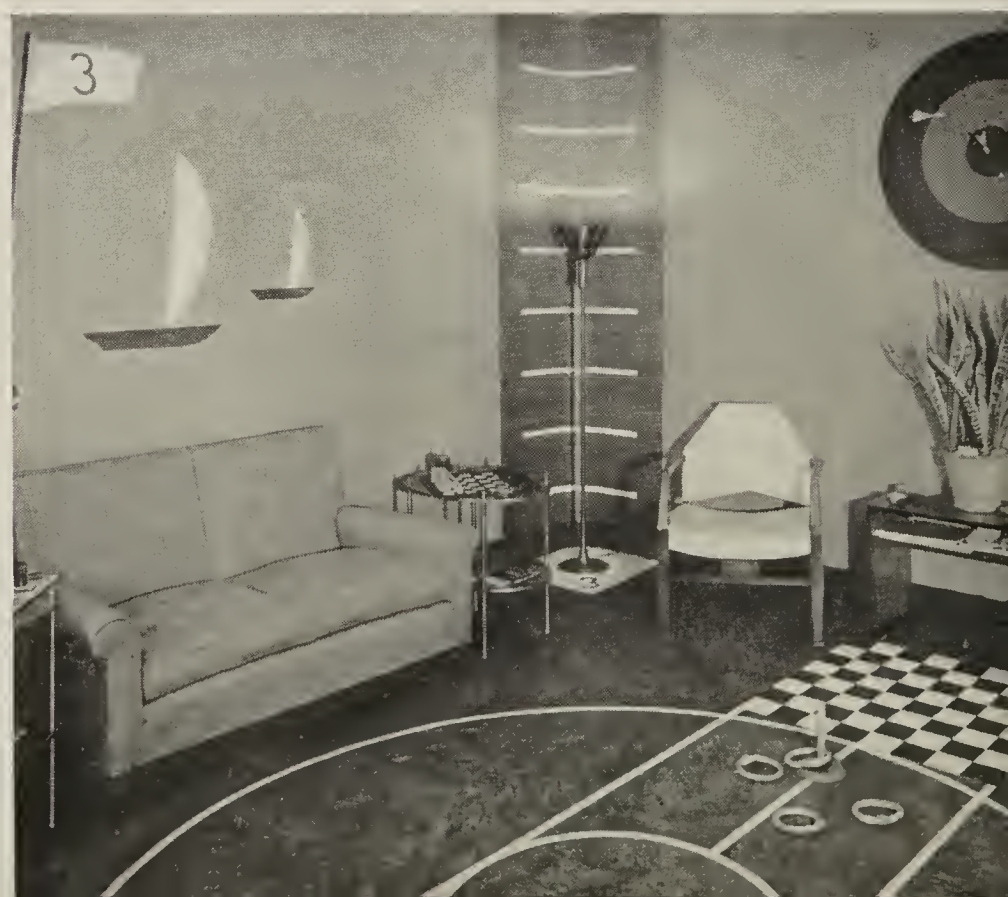

Nairn Linoleum outwears concrete!

"It's beautiful," says your client. "But will it last?"

It takes proof to answer that one. In actual tests conducted by the National Bureau of Standards, Nairn Linoleum—Sealex Battleship—outwore concrete. And our service records show thousands upon thousands of commercial floors of Nairn Linoleum which have withstood the hardest kind of wear, year after year.

Nairn Linoleum's list of satisfied customers is the best evidence we could offer.

No costly maintenance

Once a Nairn Linoleum Floor is installed, your client eliminates big maintenance costs.

The initial cost is moderate. No costly preparatory work. Installations are made over old floors.

An occasional washing and waxing takes care of the maintenance problem. No periodic paintings, scrapings or refinishing jobs such as required by wood and concrete.

SPECIFY *Nairn Linoleum*

The Northampton State Hospital, Northampton, Mass., gets beauty, economy and cleanliness in this permanent floor of Nairn Linoleum.

Nairn Linoleum—Sealex Plain, brings beauty, dignity and low maintenance cost to the Liberty Mutual Insurance Company offices in Boston.

Heavy traffic meets its master in a beautiful Nairn Linoleum—Sealex Veltone pattern at the Greyhound Bus Terminal in Denver.

SPECIFY
Nairn Linoleum
FOR SCHOOLS

Nairn Linoleum meets all requirements for schools

The Boston University Library is protected from noise and wear with a wide, dignified expanse of Nairn Linoleum—Sealex Plain.

A well planned room for the kindergarten students in this school at Westbranch, Michigan. Amusing animals cut from Nairn Sealex Plain, set in a delicately colored Nairn Sealex Veltone field.

With so many schools installing linoleum, the architect today must exercise his ingenuity as never before to provide new and interesting floor designs for his clients.

Architects will find that Nairn Linoleum provides more materials of the right type and greater latitude for working out designs and effects that are sure to win approval.

Above all else, Nairn Linoleum permits the architect to promise his clients definite quiet, comfort, cleanliness and lasting economy.

No clatter of scuffling chairs and feet on this Nairn Linoleum —Jaspé Tile floor at Washington School, St. Joseph, Michigan.

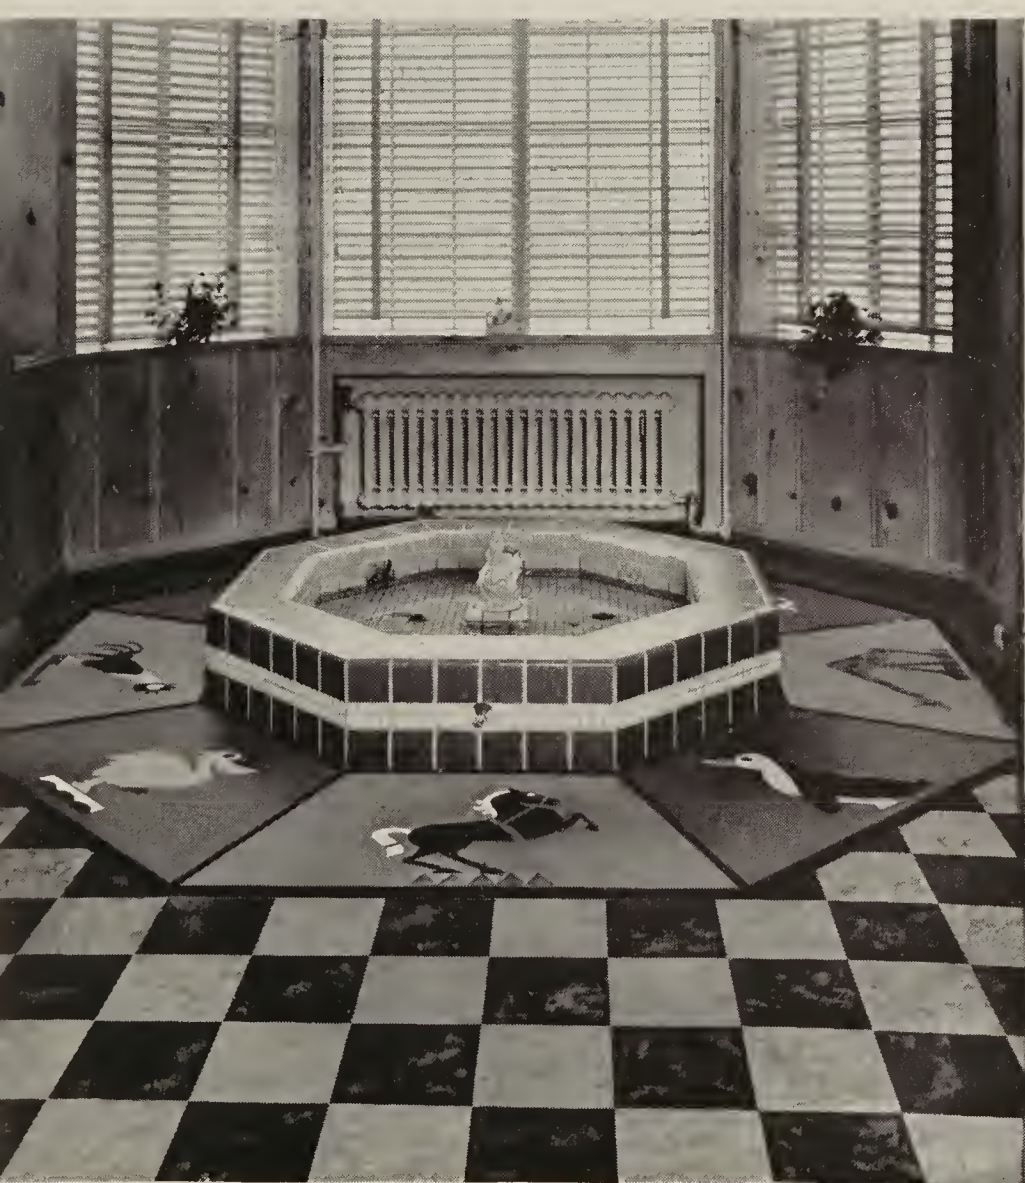

SPECIFY *Nairn Linoleum*

Left: Washington School also boasts this gay gathering of animals and birds—cleverly designed with Sealex Linoleum Tile and animal Insets.

Right: Another beautiful school floor! A broad expanse of Nairn Linoleum—Sealex Veltone with a border of Nairn Sealex Plain. Thomas Street School, Lansing, Mich.

SPECIFY
Nairn Linoleum
FOR SCHOOLS

THE BOARD OF EDUCATION of Red Hook, N. Y., gave their architects full sway—their only instructions being to produce the most modern school possible with the funds at hand. The result is a building that is attracting unusually favorable comment.

The most up-to-date equipment of the building trades industry was incorporated throughout the construction and appointments of the school. It was but natural therefore that Nairn Linoleum was selected for service over practically every square foot of the entire interior.

For durability on floors, safety on stairs, utility on walls, and for beauty and cleanliness throughout, this installation of Nairn Linoleum products in the Red Hook Central School presents a self-evident and long-lasting testimonial to architects on the diversity and value of linoleum for institutions of all kinds.

At the top of page: One of the corridors in the new Red Hook Central School. Nairn Sealex Veltone on the floor with one-piece cove base in contrasting color. Nairn Wall Linoleum is installed wainscot height, rounded corner treatment at the windows.

Center: Exterior view of the beautiful new Red Hook Central School of Red Hook, N. Y.

Left: Kindergarten Room of the Red Hook Central School. Nairn Linoleum—Sealex Plain insets in a field of Sealex Veltone. Alphabet of Plain Linoleum insets. The use of Nairn Wall Linoleum, wainscot height, one-piece cove base and border, and Sealex Veltone floors is typical of all classrooms in the school.

THERE'S a modern trend in the use of Nairn Linoleum products in Schools. The new Red Hook Central School of Red Hook, N. Y., is a striking example of the absolute superiority of Nairn Linoleum Floors and Nairn Wall Linoleum. The range of design and color combinations in Nairn Linoleum for interior decoration are virtually unlimited and adaptable to every area in school construction.

Nairn Linoleum is superior to other types of interior coverings because it is more durable, easier to keep clean, germ-killing, insulating, beautiful in its own right, and—*not more expensive*. And no other material could have complied with *all* these conditions. Nairn Linoleum makes any school a more pleasant, more inspiring place in which to work and learn.

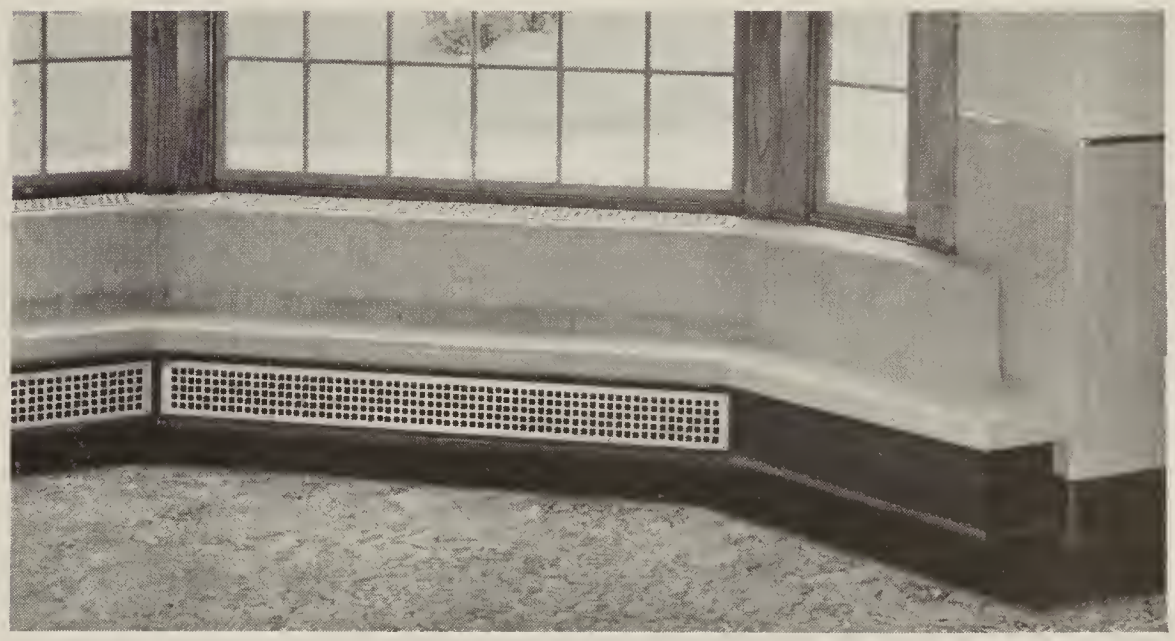

Top: A staircase of beauty and safety, durable and easily cleaned, of Nairn Sealex Veltone. Nairn Wall Linoleum on walls and rounded over stair bannisters.

Center: Close-up of window seat in Kindergarten Room showing interesting adaptations of Nairn Wall Linoleum and one-piece cove base and border of Sealex Plain Linoleum.

Left: Medical offices in Red Hook Central School. Germicidal properties of Nairn Linoleum are used to excellent advantage. Note particularly the white Desk Top Linoleum. Sealex Veltone on the floor, one-piece cove base, and Nairn Wall Linoleum leave no place for germs or dirt to lodge. Easy to clean and economical to maintain.

SPECIFY *Nairn Linoleum* FOR LIBRARIES

Nairn Linoleum for "Library Quiet"

Nairn Linoleum—Sealex Plain reflects beauty and quiet in the Mansfield Public Library, Mansfield, Ohio.

The average library floor must do a double job. It must be quiet. It must stand up under heavy traffic. Amply resilient, yet exceedingly tough, Nairn Linoleum meets these demands perfectly.

Above: Sound is hushed and maintenance expense reduced in the Hammondsport High School Library, Hammondsport, N.Y. with Nairn Linoleum—Sealex Jaspé.

The classic architecture of the Wenonah, New Jersey, Library is greatly enhanced by its Nairn Linoleum—Sealex Jaspé Tile pattern.

SPECIFY
Nairn Linoleum
FOR ATHLETIC ROOMS

Clean—resilient splinter-proof

An installation for the Topeka High School, Topeka, Kansas. Permanent court lines of Nairn Linoleum—Sealex Plain, in a field of Sealex Battleship Linoleum.

The perfect "gym" floor

Nairn Linoleum provides just the right resilience for foot comfort. Provides sure footing. Reduces foot burns. Its germicidal property kills common disease germs. Economical to install . . . inexpensive to maintain.

Nairn Cork Carpet, a highly resilient flooring, provides a perfect surface for indoor tennis courts.

SPECIFY
Nairn Linoleum
FOR CHURCHES

for dignified beauty and quiet

These pictures show that Nairn Linoleum floors have achieved the distinction of being one of the finest developments ever instituted for churches.

An unusually effective inset placed in a field of Nairn Linoleum—Sealex Veltone at the Church of the Sacred Heart, Allentown, Pa.

The subdued marble-like effects of Nairn Sealex Veltones blend beautifully with the tone and character of interiors. Sound is softened. Musty rug odors and dirt-catching crevices are eliminated.

Nairn Linoleum—Sealex Veltone adds quiet beauty to this room in St. Felicia's Convent. Note the tailored border and feature strip.

NAIRN LINOLEUM is extremely long-wearing. Records prove this! Maintenance costs, an important consideration in many churches, are surprisingly low. An occasional washing and waxing conditions the floor. No refinishing, repainting or scraping as with wood and concrete floors.

The striated effect in Nairn Linoleum—Sealex Jaspé adds just the right tone in the First Plymouth Congregational Church, Casper, Wyoming.

SPECIFY *Nairn Linoleum*

Another example of the effective use of ready-cut "Personal-ized" Insets in a field of Nairn Linoleum—Sealex Veltone—at the College Avenue M. E. Church, Muncie, Indiana.

SPECIFY *Nairn Linoleum* FOR HOSPITALS

The latest in sanitary germ-proof hospital equipment

For ready reference, we list here a few of the *many* reasons why Nairn Linoleum has been so tremendously successful in hospital installation:

1. Nairn Linoleum floors provide the germicidal quality of linoxyn,—the oxidized linseed oil in linoleum.
2. Nairn Linoleum's resiliency provides foot-easy comfort for busy staffs.
3. Nairn Linoleum's impervious surface is easy to keep clean and germ-free.
4. Nairn Linoleum is quiet under foot.
5. Nairn Linoleum is durable, economical to maintain.
6. Nairn Linoleum is stain-proof.
7. Nairn Linoleum provides a wider range of colors and patterns for more cheerful effects.

Sunshine, fresh air, and a cheerful floor of Nairn Linoleum—Sealex Veltone, with sprightly, hand-cut insets. And no dirt-catching crevices or corners in this Children's Playroom at St. Mary's Hospital, Detroit.

They get well with a smile in this ward at the Children's Hospital in San Francisco. Nairn Linoleum—Sealex Plain provides a sea green background for the clever "sea-going" insets.

A well-equipped, germ-proof room at St. Louis Hospital, Berlin, N. H.
Nairn Linoleum—Sealex Veltone with attractive Inset Border.

SPECIFY
Nairn Linoleum

Nairn Linoleum—Sealex Veltone provides a tough, wear-resisting floor for a busy corridor at St. Louis Hospital, Berlin, N.H.

A view of the Pediatric Room, St. Mary's Hospital, Detroit. A stunning Nairn Linoleum—Sealex Veltone pattern—with Inset Border and amusing stork cut from Sealex Plain Linoleum.

SPECIFY
Nairn Linoleum
FOR HOSPITALS

Quiet for patients... Comfort for the staff...

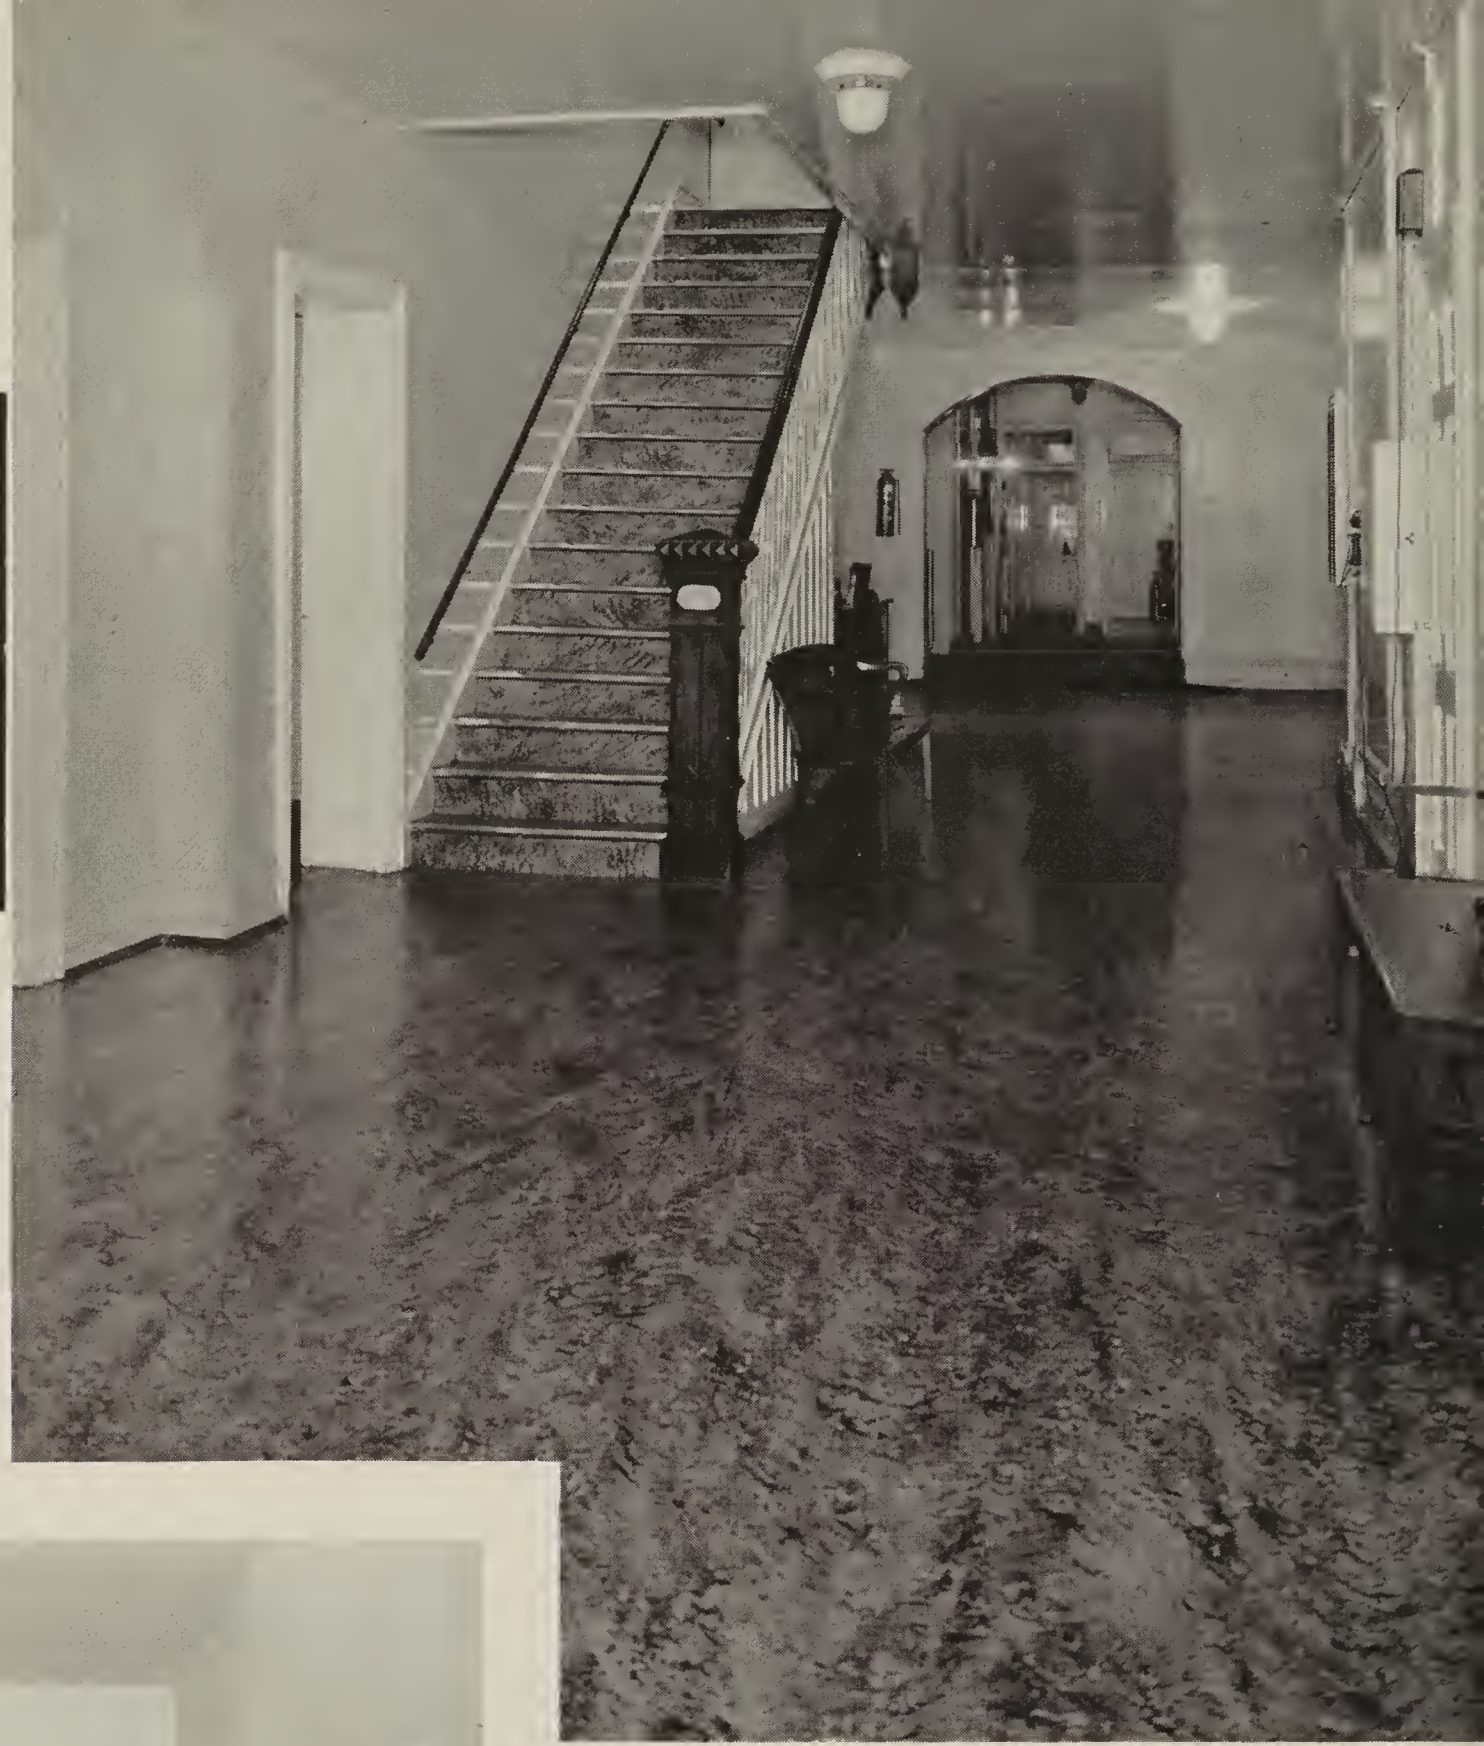

An exquisite pattern, yet tough and resilient, this Nairn Linoleum—Sealex Veltone brings foot-comfort and quiet to the corridor of the Cooper Hospital, Camden, N.J.

The ever-popular Nairn Linoleum—Sealex Jaspé answers all requirements for the hallways in the State Mental Hospital, Howard, R.I.

Clean, resilient floors of Nairn Linoleum—Sealex Veltone, and Nairn Wall Linoleum with lively animal insets decorate this room in St. Mary's Hospital, Detroit, Michigan.

SPECIFY *Nairn Linoleum*

The nursery in Sarah Fisher Annex, Providence Hospital, Detroit, Mich. Floor of Nairn Linoleum—Sealex Veltone with sanitary, one-piece cove base and border. The walls are Nairn Wall Linoleum to wainscot height.

SPECIFY *Nairn Linoleum* FOR HOSPITALS

Nairn Linoleum offers a solution to every floor problem

The patient gets relief from foot clatter when Nairn Linoleum takes over the floor duty. And he senses its beauty that helps relieve the ordinary hospital atmosphere.

The staff finds Nairn Linoleum easier to walk on—easier to maintain and keep clean.

The management discovers that Nairn Linoleum is moderate in first cost—inexpensive to "keep up." No annual paintings, scrapings or varnishings.

The quiet beauty of this hospital corridor is made possible with Nairn Linoleum—Sealex Veltone—set off with a narrow feature strip and border of darker Sealex Veltone.

At left: Another example of how Nairn Linoleum—Sealex Veltone—can liven up the atmosphere of a ward room—an installation at the Atlantic City Hospital.

Another Nairn Linoleum—Sealex Jaspé floor in the corridor of the Holy Name Hospital, Teaneck, N.J. Plain border and sanitary one-piece cove base.

Both floors and walls of this ward in the Backus Memorial Hospital, Norwich, Conn., shown above, are of Nairn Linoleum. The smooth, impervious surface means complete sanitation. And the resilience of the long-wearing Nairn Sealex Jaspé floor will quiet the noise of footsteps.

SPECIFY *Nairn Linoleum*

Below: Absolute cleanliness is the watchword in the operating room. At Latrobe Hospital, Latrobe, Pa., floors, walls and ceiling are protected with Nairn Linoleum.

Caduceus—emblem of the medical profession—provides the motif for an appropriate, highly decorative Nairn Linoleum—Sealex Inset for hospital or doctor's office.

SPECIFY
Nairn Linoleum
FOR PROFESSIONAL OFFICES

Above: Dr. Weiner of Kearny, N.J., welcomes his patients in this inviting waiting room with Nairn Linoleum—Sealex Veltone, decorated with Nairn Feature Strips.

Left: Advertising must be attractive. A Chicago advertising agency starts in its reception room with a smart floor of Nairn Linoleum—Sealex Veltone and ready-made border, with walls of Nairn Wall Linoleum.

Right: Strikingly beautiful, immaculately clean is this Nairn Linoleum—Sealex Veltone floor with contrasting border in the operating room of Dr. Weiner.

Nairn Linoleum dignifies the professional office

As every architect knows, there is no reason in the world why professional offices shouldn't be smart and comfortable.

Architects with a flair for this type of decoration are having tremendous success with Nairn Linoleum.

And they find ready-cut "Personal-ized" Insets ideal for creating special effects "in keeping" with the various types of professional offices.

SPECIFY
Nairn Linoleum

The Caduceus, emblem of medicine, hand-cut from Nairn Sealex adds a striking touch to the office of Dr. I. J. Aronson, Elizabeth, N.J.

Left: In his waiting room Dr. Aronson had Nairn Sealex Plain installed with a simple but attractive hand-cut initial design.

Right: Dr. Archibald Lyon, North Arlington, N. J., achieved a striking effect with Nairn Linoleum—Sealex Veltone, emphasized with two-member borders.

SPECIFY
Nairn Linoleum
FOR COMMERCIAL AREAS

Business reflects its tone and character with Nairn Linoleum

Whether it's a lively broadcasting studio or a dignified directors' room, Nairn Linoleum is the only flexible medium for capturing exactly the right spirit in any commercial area.

Deeper than beauty is Nairn Linoleum's efficiency. Its tough surface wears for years. It's economical to maintain. Its resilience promotes quiet and foot-easy comfort for employees.

At top, right: This business-like office in the Sun Life Assurance Co. of Canada gets dignified beauty and quiet with Nairn Linoleum—Sealex Veltone, using a contrasting border and feature strip.

Above: Station WDBJ, Roanoke, Va., broadcasts from a cleverly designed floor of Nairn Linoleum —Sealex Plain, styled-up with contrasting feature strips.

Right: A touch of the "modern," on the dignified side, in the conference room of the Liquid Carbonic Corporation, Chicago, Illinois, created with Nairn Linoleum—Sealex Veltone, accented with Sealex Plain insets.

Right: Good taste is reflected in the artistic offices of the International Silver Co., Meriden, Conn., with a simple design of Nairn Linoleum—Sealex Veltone.

SPECIFY

Nairn Linoleum

Left: A combination of beauty and quiet seclusion achieved in the offices of Barrow, Wade and Guthrie, Philadelphia, with Nairn Linoleum—Sealex Veltone and contrasting border and feature strips.

Right: The Denver Chamber of Commerce accomplishes the spirit of invitation with a broad expanse of Nairn Linoleum—Sealex Veltone and custom-cut inset.

SPECIFY
Nairn Linoleum
FOR COMMERCIAL AREAS

Nairn Linoleum is the "efficient" office floor

Right: "Up" goes efficiency, "down" go maintenance costs in this general office of the Standard Oil Co. of New Jersey, RCA Bldg., New York City. A smooth, quiet floor of Nairn Linoleum—Sealex Plain.

Below: An exquisite Nairn Linoleum—Sealex Veltone in an executive office of the Standard Oil Company of New Jersey, with a business-like, two-member border trim.

A truly unusual and distinctive floor of Nairn Linoleum—Sealex Veltone with "Personal-ized" "Disc" insets, squared off with strips. The reception room of the Hyatt Roller Bearing Co., Harrison, N. J.

Nairn Linoleum—Sealex Plain, with decorative strips, adds an extremely trim effect in the Display Room and Lounge of the U.S. Playing Card Co., Cincinnati, Ohio.

Left: Ultra-smart, yet quiet and efficient is this Nairn Linoleum—Sealex Veltone pattern in an office of Underwood-Elliott-Fisher.

SPECIFY
Nairn Linoleum
FOR COMMERCIAL AREAS

Right: Streamlined cars and streamlined selling are accented in the Anderson Buick showroom with a specially created design of Nairn Linoleum—Sealex Plain.

The "modern" floor for modern business

Above: Note the unusual border treatment created in a field of Nairn Linoleum—Sealex Veltone at the Better Homes and Buildings Exhibit, Gulf Bldg., Pittsburgh.

Nairn Linoleum—Sealex Veltone sets off this imposing interior of the Town Hall in Kearny, N.J.

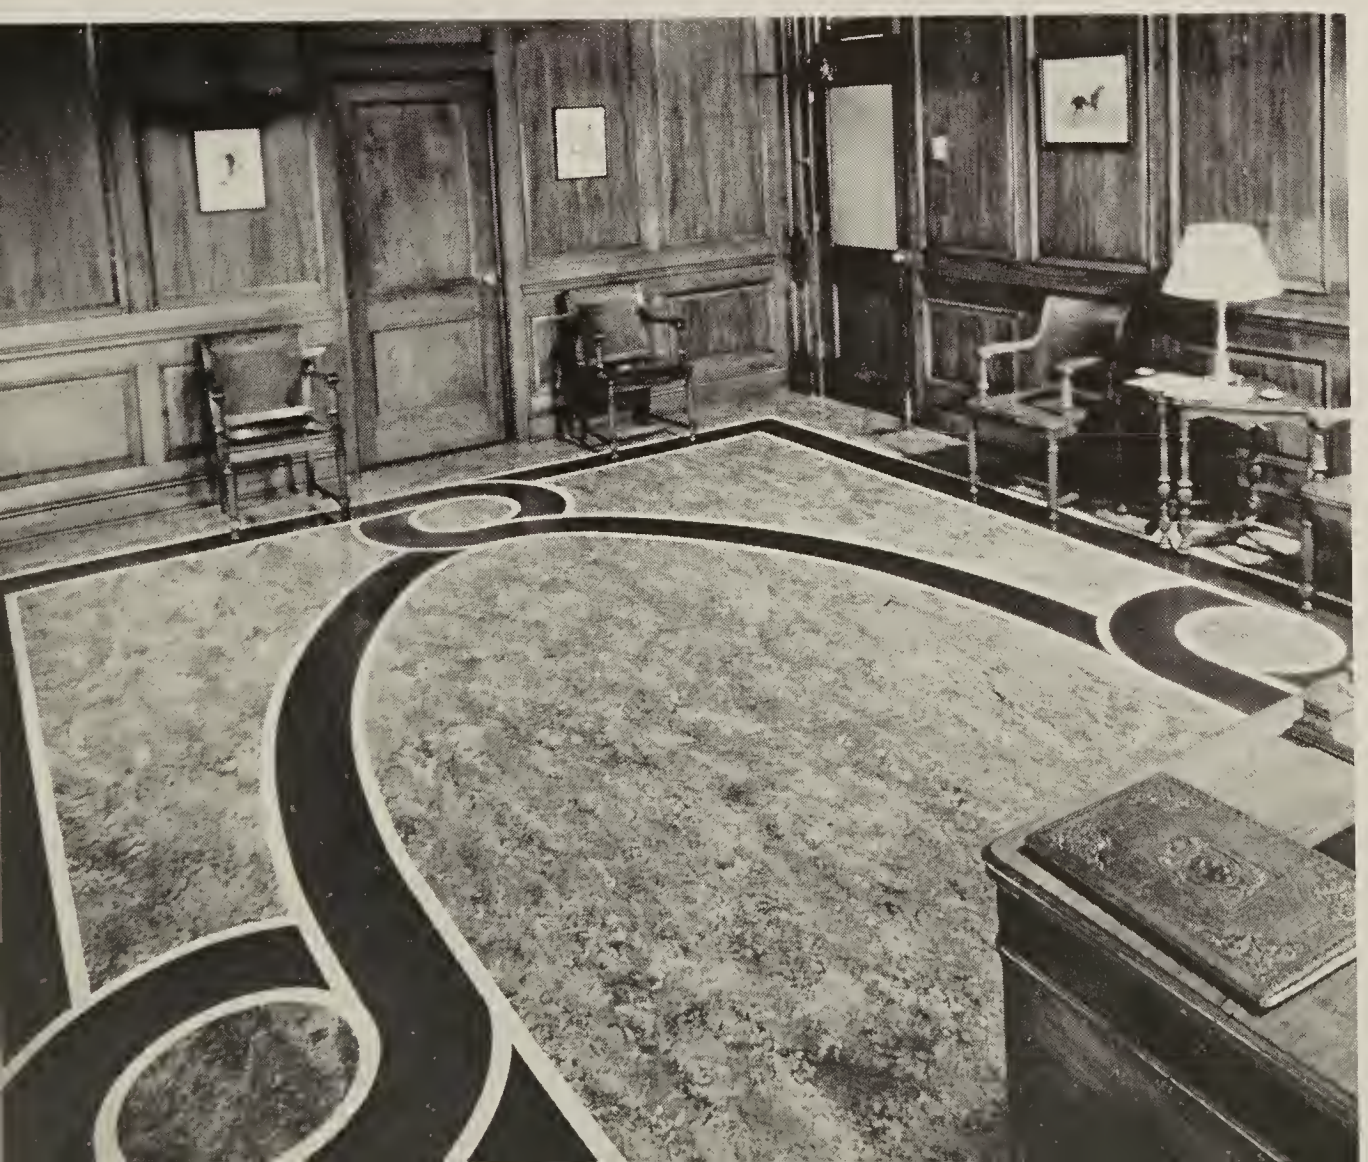

Above: Startling and effective Achieved in pure black Nairn Linoleum —Sealex Plain with contrasting inset and triple-member border for the reception room of Walter Street Company, Boston, Mass.

SPECIFY *Nairn Linoleum*

Left: The architect cleverly recreated this medieval design with modern materials—Nairn Linoleum—Sealex Veltone pattern with hand-cut insets.

SPECIFY
Nairn Linoleum
FOR COMMERCIAL AREAS

Utmost in beauty
Utmost in utility

Beauty that will last for years, in a specially designed Nairn Linoleum floor for the New York Life Insurance Company.

The American Airways waiting room, Newark, N.J., installed a sweeping expanse of tough, wear-resisting Nairn Linoleum—Sealex Veltone.

SPECIFY
Nairn Linoleum
FOR PUBLIC BUILDINGS

3,000,000 square feet of permanent flooring satisfaction in these 5 public buildings

Nairn Linoleum has the faculty of combining *all* the important demands of public building floors—dignified beauty, durability and easy, economical maintenance.

The architect will find our files complete with records of complete satisfaction in hundreds of municipalities, in State Capitols, and at Washington, D.C.

Installed by authorized contractors, Nairn Linoleum carries a guaranty bond covering the full value of workmanship and materials.

Department of Justice Building

Department of Agriculture Main and Extension Buildings

The Archives Building

Bureau of Engraving and Printing

Library of Congress

SPECIFY *Nairn Linoleum* FOR STORES AND SHOPS

Nairn Linoleum enhances selling atmosphere

Thousands of retailers have discovered that smart, modern floors of Nairn Linoleum have actually helped step up patronage beyond all expectations.

Beauty and a spirit of "come in" are easily expressed in an unlimited range of individual effects and color combinations.

Patrons and sales clerks like the quiet comfort underfoot. And the management gets an extra bonus in longer-lasting, more economical floors.

Hin and Dickson of Paterson, N.J., gets a pleasing effect with Nairn Linoleum—Sealex Veltone, embellished with strips of Sealex Plain Linoleum.

Special designs and insets of Nairn Linoleum—Sealex Plain in the smart David Shop, Pittsburgh, Pa.

SPECIFY
Nairn Linoleum

Cleanliness is accented in this Nairn Linoleum—Sealex Veltone floor with its broad, plain insets. Note, too, the one-piece cove base—and decorative Nairn Wall Linoleum installed by Dairyland, Inc.

Above: Sanitation and invitation get together in this Hill Grocery Store Interior. Nairn Linoleum—Sealex Veltone forms the field for an unusual "name" inset—set off with two-member border and cove base.

Left: The smart Duvernoy Bakery Shop, New York City, invites customers with a richly-veined Nairn Linoleum — Sealex Veltone pattern.

SPECIFY
Nairn Linoleum
FOR STORES AND SHOPS

The personal-ized design for modernized selling

At right: Smart selling on smart floors at the J. C. Peterson Co., Fort Dodge, Iowa. Nairn Linoleum — Sealex Veltone with ready-cut "Personal-ized" Insets.

Below: Clever designing and several colors of Nairn Linoleum—Sealex Jaspé match the modernized selling ensembles at Levy Brothers Men's Shop, Louisville, Kentucky.

The architect added the final note of beauty with Nairn Linoleum—Sealex Veltone and "Personal-ized" Inset in this store of the Carroll Cut Rate Perfume Company of Boston.

SPECIFY
Nairn Linoleum

Right: More sales appeal in an Adam Hat Store . . . created by a dramatic combination of insets and borders with Nairn Linoleum—Sealex Plain.

Left: Shoes on parade at Feltman & Curme, Dayton, Ohio. Nairn Linoleum—Sealex Plain, dramatized and stylized with "Personal-ized" feature strips.

SPECIFY
Nairn Linoleum
FOR STORES AND SHOPS

A permanent beauty treatment for shops

Brannon's Beauty Shop at Hamilton, Ohio, says "beauty" from the floor up. A rich, colorful Nairn Linoleum—Sealex Veltone pattern set off with a three-member border.

Immaculately clean, impressively beautiful is this black pattern of Nairn Linoleum—Sealex Plain at the Grant Building Barber Shop in Pittsburgh, Pa. The six foot squares are decorated with insets of Ivory, Green and Red.

Squares of Nairn Linoleum—Sealex Veltone and Plain provide the finishing touch of interior beauty for this Bond Clothing Company store at Fort Worth

In the Brentwood Meat Market, Pittsburgh, Pa., the floor is a rich, dark pattern of Nairn Linoleum—Sealex Veltone, set off with contrasting border treatment.

SPECIFY
Nairn Linoleum

SPECIFY
Nairn Linoleum
FOR STORES AND SHOPS

Nairn Linoleum for increased patronage, decreased cost.....

The customers of Dennison's smart new Fifth Avenue Store expect to see smart decorations. A bright Nairn Linoleum—Sealex Veltone pattern provides an ideal setting.

A striking installation for the reception room floor in the Maison Frederic Beauty Shop. The shop's custom-cut crest and a triple-member border were set in a Nairn Linoleum—Sealex Plain field.

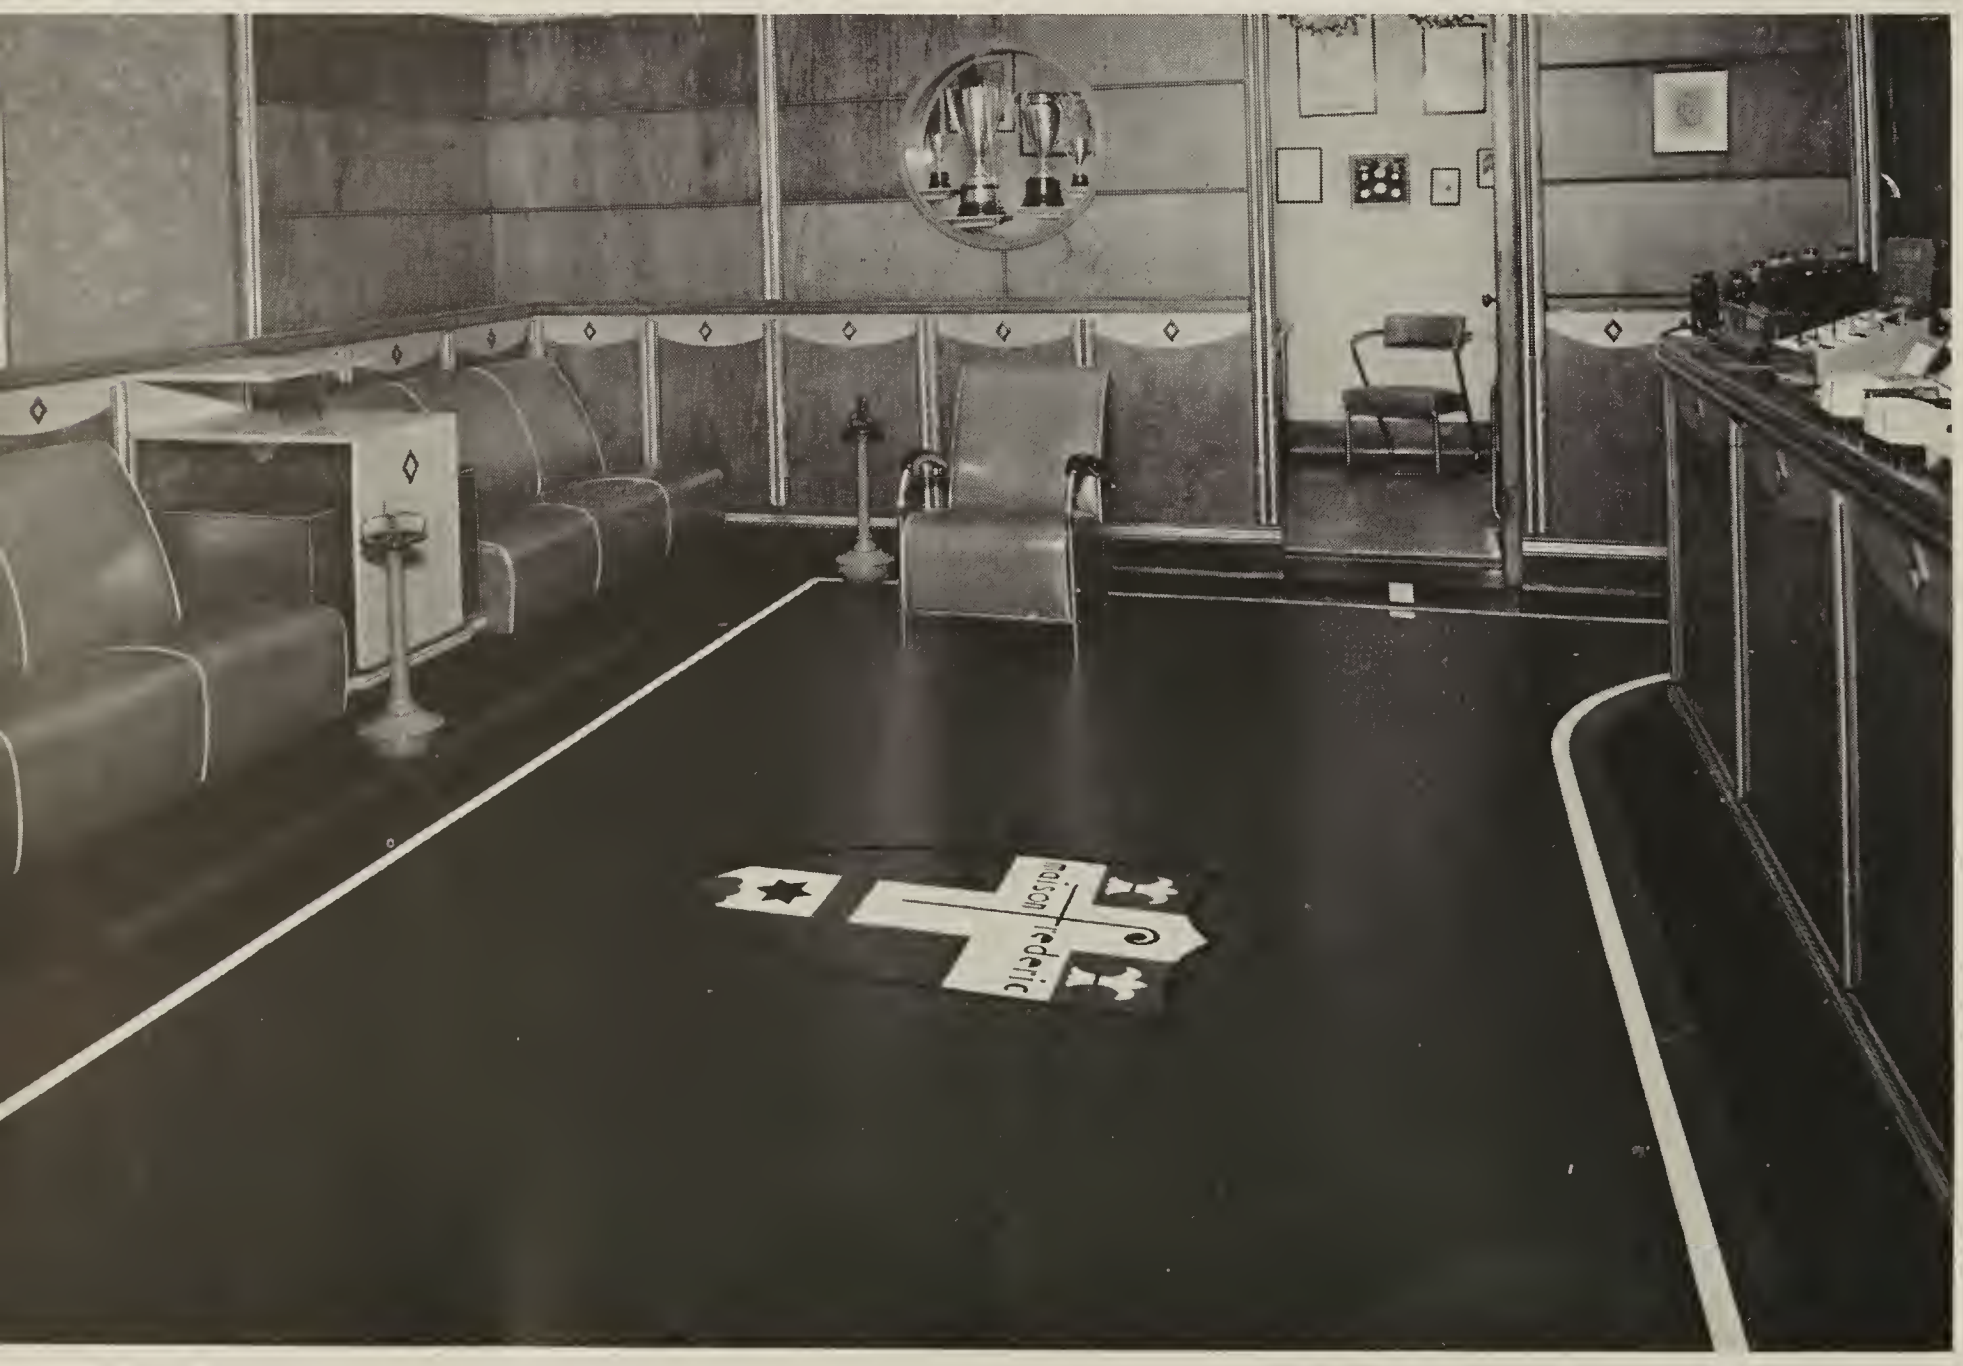

Increased patronage and decreased maintenance cost are reflected in this exceptionally good example of the simple "modern," created for Wolfsheim & Sachs, New York City.

The Mutual Grocery Store, Madison, N.J., shows off an attractive floor that looks clean and is easy to keep clean. The Nairn Linoleum—Sealex Veltone field is decorated with triple-member border, plain insets and specially cut trade mark.

Individuality, well done in this haberdashery shop. The Nairn Linoleum—Sealex Veltone field was inset with black border and hand-cut trade mark in contrasting colors.

The Strauss Jewelry Company of Dallas achieved perfect balance and everlasting floor beauty with insets of Sealex Plain Linoleum in a field of Sealex Veltone.

SPECIFY *Nairn Linoleum* FOR HOTELS AND CLUBS

Nairn Linoleum is a "permanent resident" at the smartest hotels and clubs . .

Hotels and Clubs have been quick to discover the many unique advantages of flooring *throughout* with Nairn Linoleum.

No other medium offers such decorative possibilities. Individual effects for luxurious surroundings—hundreds of dramatic color combinations—all these are possible with Nairn Linoleum.

The architect will find his clients especially well pleased with the economies of installation and maintenance.

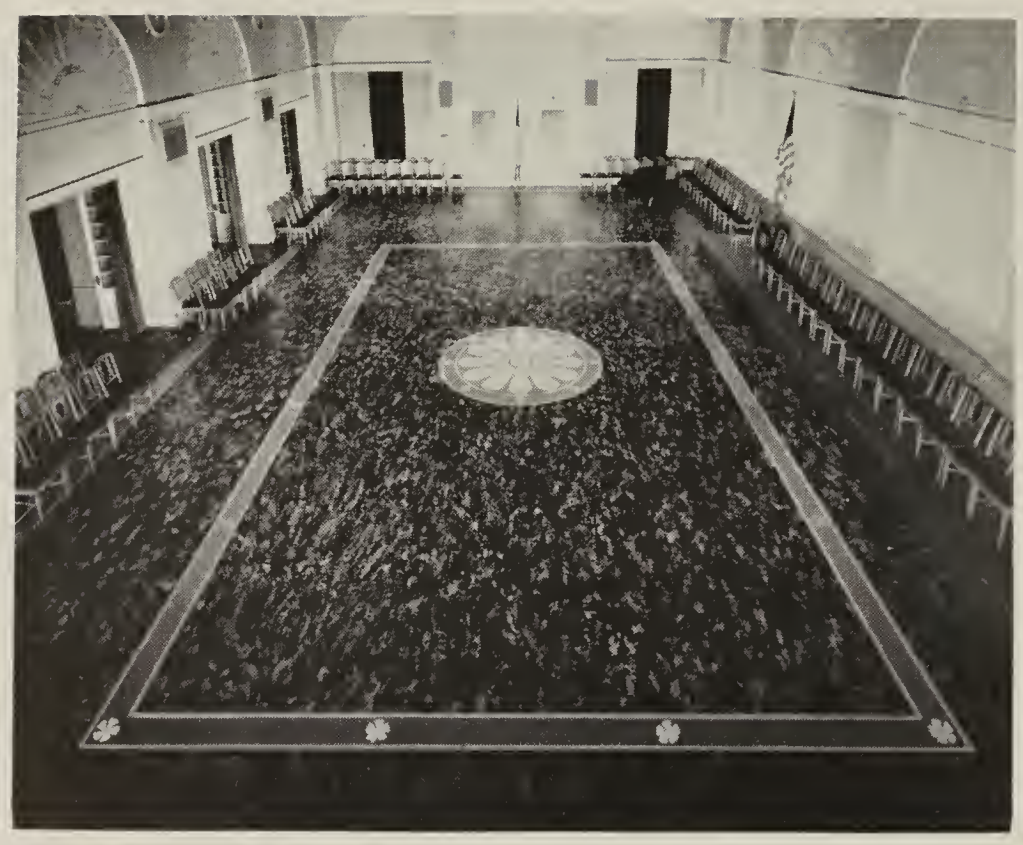

The Banquet hall in the Penn Harris Hotel. This superb floor is Nairn Linoleum—Sealex Veltone, inset with hand-cut border and medallion.

Gay and glistening is this dance floor at the Pittsburgh Athletic Association. It is Nairn Linoleum—Sealex Plain. The outer panel is Sealex Veltone with Sealex Plain feature strips.

PERHAPS in no other linoleum line will the architect find such complete and faithful adherence to correct color correlation. No expense is spared in the determination of each new pattern and color treatment in Nairn Linoleum.

The architect will find complete harmony of color and limitless possibilities in designing unusual custom-cut effects.

SPECIFY
Nairn Linoleum

The Dutch Treat Room of the Newark Athletic Club installed a clever floor of Nairn Linoleum—Sealex Veltone, squared off with white strips, made dramatic with novel hand-cut insets.

This Nairn Linoleum Sealex Veltone floor at the Elk's Lodge, Mansfield, Ohio, presents a pleasing, welcoming background.

SPECIFY
Nairn Linoleum
FOR HOTELS AND CLUBS

Money saving service for ballroom, lodge room or solarium

A perfect dance floor was installed at the Newark Athletic Club with Nairn Linoleum—Sealex Veltone field with special border and inset.

A rich marbleized effect for the Lodge Room of the Pen Argyl National Bank, Pen Argyl, Pa. Nairn Linoleum—Sealex Veltone forms the field for a decorative hand-cut centerpiece and feature strip border.

Above: Dainty, yet easily maintained is this artistic floor in the Japanese Tea Room at the Ambassador Hotel, Atlantic City, N.J. One of the popular new pastel shades of Nairn Sealex Veltone is beautifully panelled with double-member dividing borders of Nairn Plain linoleum.

SPECIFY
Nairn Linoleum

An installation in the Sun Parlor of the Ambassador Hotel, Atlantic City, N.J. Contrasting squares of Nairn Linoleum—Sealex Veltone make a striking tile appearance.

SPECIFY *Nairn Linoleum* FOR HOMES

Individual beauty and efficiency make a house a home...

Nowhere else is Nairn Linoleum more "at home" than in the home. Here, with the sensationally popular new "Personal-ized Floors" the architect can create those *individual* effects that delight a woman's heart.

With the new designs in Nairn Wall Linoleum the client gets an "easy-to-keep" home (with low-cost upkeep) that's a comfort for life.

Nairn Linoleum—Sealex Veltone for the floor . . . with immaculate Nairn Wall Linoleum above. Note the contrasting, one-piece cove base.

Below: Carefree and footeasy is this kitchen floor of Nairn Linoleum—Sealex Veltone with clever, modern feature strip decoration.

An excellent example of the "Personal-ized" floor. Ready-cut "Personal-ized" discs and leaves, inset in a rich tone of Nairn Linoleum—Sealex Plain, installed in fight promoter Mike Jacobs' home in Rumson, N.J.

Another unusual "Personal-ized" floor. Glistening Nairn Linoleum—Sealex Plain with contrasting feature strip border.

Strikingly artistic living room floor, created for Mike Jacobs with special hand-cut insets in Nairn Linoleum—Sealex Plain.

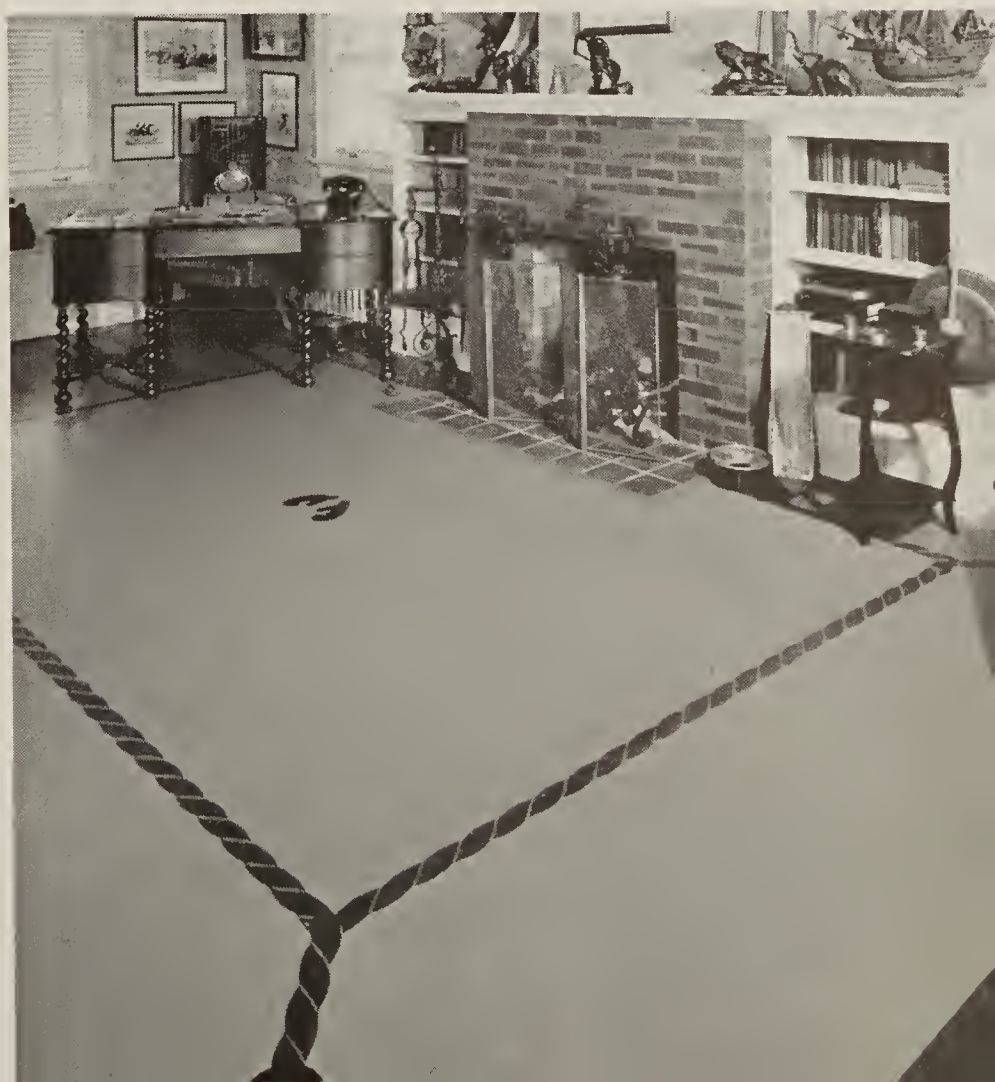

SPECIFY *Nairn Linoleum* FOR HOMES

Nairn Linoleum extends a "permanent welcome"

Right: A permanently beautiful entrance hall. Ready cut "Personal-ized" disc insets and border set in a field of Nairn Linoleum —Sealex Veltone.

Above: A perfect picture of dignity with the "Personal-ized" floor. Ready-cut insets in a rich pattern of Nairn Linoleum—Sealex Veltone.

Right: Individuality and lasting beauty—that's what the "Personal-ized" floor of Nairn Linoleum does for the home.

NAIRN LINOLEUM

INSTALLATION SPECIFICATIONS

The distinctive advantages of linoleum have brought about its application to many interior areas which have involved certain technical problems and which must be met to insure the utmost satisfaction. It is the purpose of this section to show in detail correct methods of application in all types of areas, including those where such problems exist. The installation specifications described and illustrated herein have been collated for the convenience of architects, builders, and linoleum layer-mechanics.

These specifications are the result of practical research and actual experience over a period of 40 years both in the field on actual jobs and in the Laying School for layer-mechanics which Congoleum-Nairn maintains at Kearny, New Jersey.

Linoleum, properly installed, is a lasting testimonial to the good judgment of the architect and interior decorator—and to the skill of the builder and layer-mechanic. The installation itself is the best advertisement for new projects.

UNDERFLOORS

SUSPENDED CONCRETE

(See Illustration Page 177)

The linoleum contractor shall furnish and install the materials hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn.....Linoleum, thickness....., Pattern No....., and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Adhesive: The adhesive for cementing the linoleum directly to the concrete underfloor shall be Nairn Green Label Paste as manufactured by Congoleum-Nairn Inc., and applied in accordance with manufacturer's instructions.

UNDERFLOOR CONDITION: The concrete floor shall be furnished to the linoleum contractor broom-clean and satisfactorily dry. The surface shall be a smooth, even, troweled-cement finish.

Standard Construction: On standard construction the concrete slab shall have a cement topping not less than 1½" thick and a mix no leaner than one-part Portland Cement and three-parts clean screened sand. Expansion joints which are cut through the top layer of the cement shall be retroweled, furnishing an even top surface.

Monolithic Construction: On monolithic construction the concrete floor slab shall be troweled to a smooth side-walk finish, free from high and low spots.

On concrete floors where expansion joints have not been retroweled, they shall be filled in by the linoleum contractor with non-shrinking plastic material such as Savogran, Floorstone or equal, so that such joints will not show through the surface of the linoleum.

Installation of linoleum shall not proceed until tests have been made to assure that the floors are satisfactorily dry. These tests shall be conducted preferably with a Congoleum-Nairn Inc., concrete moisture content detector. No linoleum shall be laid under this specification over concrete which is below or on grade, or directly over the ground (unless ventilation is provided between the underfloor and the ground).

APPLICATION OF MATERIALS: On the concrete floor thus prepared, Nairn Linoleum shall be applied. It shall be cut to fit the room accurately and neatly and shall be laid so as to have the fewest possible seams and in a manner to assure pattern match at longitudinal and cross seams. At junctions with vertical surfaces, the linoleum shall be carefully scribed so as to form a tight joint at these points. Allowances shall be made for from ½ inch to ¾ inch lap at all seams for double cutting (see "NOTE" on next page for pattern goods). The linoleum shall then be cemented all over directly to the concrete floor using Nairn Green Label Paste, and shall be rolled immediately from the center of the sheet out, with a roller weighing 150 pounds, to obtain complete adhesion and to remove all air bubbles.

SEAMS: After the linoleum has thus been cemented to the floor with the seams properly lapped, the seams shall be cut through the two thicknesses and the edges of the linoleum shall then be embedded into the adhesive and thoroughly rolled to obtain a tight, even, workmanlike seam.

All seams and edges shall be thoroughly weighted down with sand bags to aid proper adhesion.

Where cross seams in linoleum are necessary, the linoleum should be cemented to the floor allowing approximately six inches lap where the seam is to be made. After the cemented area has been thoroughly rolled, the linoleum should be left in this lapped condition for at least one hour to permit any shrinkage that might occur. Paste should then be applied to the floor under the lap and the linoleum cut through both thicknesses using a straight edge as a guide. During this operation, excessive bending of the linoleum should be avoided.

UNDERFLOORS
SUSPENDED CONCRETE
(Continued)

NOTE: Specifications for cutting seams where pattern goods are to be installed. The seams shall be only slightly lapped (not more than 3/16 inch). The edge of the upper sheet shall be used as a guide for cutting the lower sheet in order to secure a tight and sightly seam. This method of applying pattern goods must be followed to avoid distorting the pattern.

CLEANING OF LINOLEUM: The linoleum contractor shall remove all paste spots with a damp cloth, leaving the linoleum floor broom clean and in good condition.

PROTECTION: After the linoleum floors have been inspected and approved, the general contractor shall cover the linoleum with heavy paper in rooms where painting or other work is to be done as a protection until the building is ready for occupancy.

LIGHTING, HEATING, HOISTING AND POWER: Without cost to the linoleum contractor the owner or general contractor shall maintain a temperature of at least 70° F. during the time the linoleum work is being done. He shall light the rooms sufficiently for efficient work; he shall furnish hoisting service; he shall furnish the necessary power to clean and polish the floor.

GUARANTEE: The linoleum contractor shall guarantee the floor against all defects in material and workmanship for.....years from date of the completion of the job.

WALLS
PLASTER
(See Illustration Page 177)

PLASTER: *Erection of Walls:* Walls and ceilings to receive Nairn Wall Linoleum as indicated on the plans and/or as called for in the specifications, shall be of good quality plaster with white coat finish, erected in such manner that when dry they shall be firm, hard and smooth.

Rough spots and trowel marks shall be sanded smooth with coarse sandpaper. Cracks or indentations shall be filled with Savogran Type A Cement, or equal, sanded to a smooth surface when dry.

Interior corners shall be square, brought to a true plumb—or—rounded to a radius of 5/8". Exterior corners shall be square, brought to a true plumb—or—rounded to a radius of 5/8". Explanatory note—in the case of interior corners it is not necessary to erect rounded plaster corners as the wall-covering itself will form the desired cove; provision for rounded exterior corners must be made in the plaster.

Before the application of Nairn Wall Linoleum, plaster walls shall test dry in accordance with Congoleum-Nairn's specifications for testing for moisture. Where called for, walls shall be primed with Nairn Wall Primer as specified by Congoleum-Nairn Inc. Testing of walls for dryness and the priming, if any, are to be performed by the wall linoleum contractor.

Brown coat and special patent plasters: If cement is added to the brown coat mix and if the surface is steel troweled to a smooth finish, the brown coat may be used as an underwall for Nairn Wall Linoleum. Patent plasters properly troweled are also suitable.

On all walls and ceilings as indicated on the plans and/or as called for in the specifications, supply and install Nairn Wall Linoleum as follows:

MATERIALS: Wall Linoleum—The wall linoleum shall be Nairn Wall Linoleum, Pattern No.....

ADHESIVE: The adhesive for bonding wall linoleum to underwall shall be Nairn Wall Linoleum Adhesive No. 310.

WALLS
PLASTER
(Continued)

WORKMANSHIP: Installation of Nairn Wall Linoleum shall be performed by an approved Congoleum-Nairn dealer and in accordance with manufacturer's prescribed methods.

TREATMENT OF WALL LINOLEUM AT CORNERS: Interior corners shall be rounded—or—squared; exterior corners shall be rounded—or—squared, as shown on the plans and/or in the specifications.

ALLOWANCE FOR THICKNESS OF WALL LINOLEUM: An allowance of approximately ⅛″ for thickness of wall linoleum shall be made at all abutments, such as wall fixtures (especially bathroom equipment), door jambs, window frames, baseboards, etc.

Before the application of Nairn Wall Linoleum, plaster walls should test dry in accordance with Congoleum-Nairn's specifications for testing for moisture. Where called for, walls shall be primed in accordance with specifications of Congoleum-Nairn, Inc. Testing of walls for dryness and the priming, if required, are to be performed by the Nairn Wall Linoleum contractor.

CLEANING: Upon completion of installation, the surface of the wall linoleum shall be thoroughly cleaned with lukewarm water and mild soap.

GENERAL CONDITIONS: No Nairn Wall Linoleum shall be applied in a room where the temperature is under 70° F.

BRIEF SPECIFICATIONS: On all plaster walls as indicated on plans and/or as called for in specifications, apply Nairn Wall Linoleum Pattern No..... The wall linoleum shall be installed in accordance with the manufacturer's specifications.

SPECIFICATION FOR PLASTER WALLS: Walls and ceilings to receive Nairn Wall Linoleum as indicated on the plans and/or as called for in the specifications, shall be of good quality plaster with white coat finish, erected in such manner that when dry they shall be firm, hard and smooth.

ARCHITECTURAL SPECIFICATIONS: Rough spots and trowel marks shall be sanded smooth with coarse sandpaper. Cracks or indentations shall be filled with Savogran Type A Cement, or equal, sanded to a smooth surface when dry.

Exterior corners shall be square, brought to a true plumb—or—rounded to a radius of ¾″.

GENERAL CONDITIONS: Nairn Wall Linoleum shall not be applied to walls the exterior faces of which are exposed to the elements of weather or that are in contact with the ground, unless such walls shall have been furred out. In the case of tile, brick, concrete or similar masonry walls, a dampcourse must be provided.

STRAIGHT LINOLEUM BASE: After the completion of floors and walls, the linoleum contractor shall install a straight linoleum base 6″ in height or as specified by the architect. This linoleum base shall be secured to the wall with Nairn Green Label Paste and the upper edge shall be rounded off with the back of the linoleum knife. Where necessary, headless brads shall be used to hold the linoleum to any inequalities in the wall.

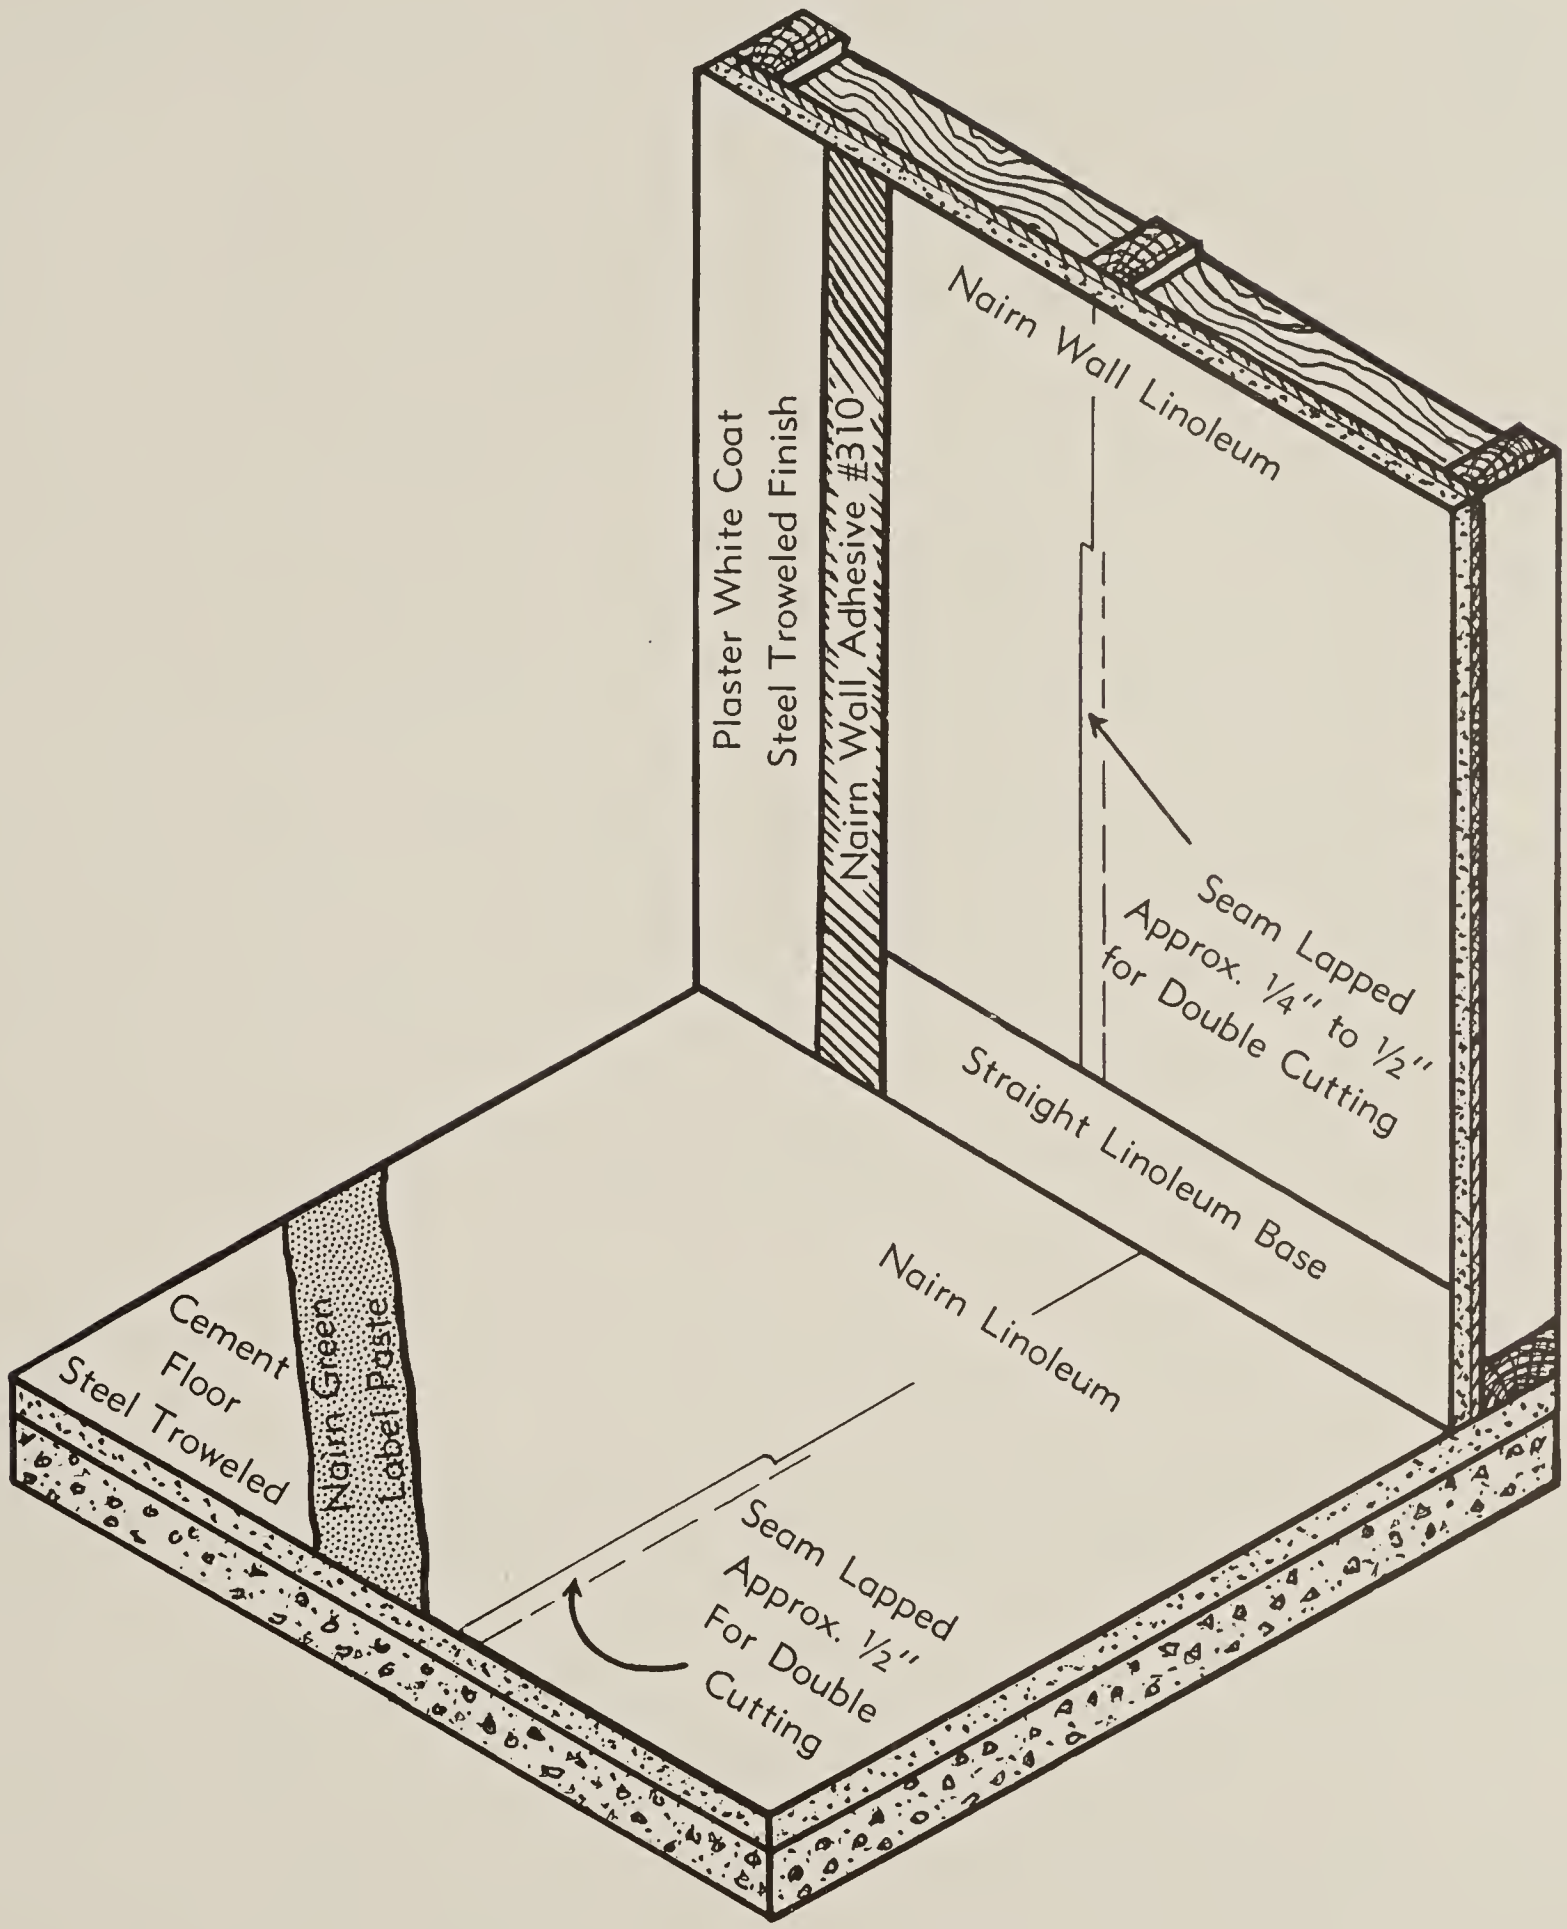

Specification for Installing:

Nairn Linoleum over Concrete Underfloor.

Nairn Wall Linoleum over Plaster.

UNDERFLOORS

SUSPENDED WOOD

(See Illustration Page 181)

The linoleum contractor shall furnish and install the materials hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn . . . . . Linoleum, thickness . . . . . , Pattern No. . . . . , and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Lining Felt: (To be used over wood underfloors only). The felt shall be Nairn Lining Felt, either unsaturated or asphalt saturated. The unsaturated lining felt shall weigh approximately one pound per square yard. The saturated felt shall have a minimum weight of approximately one and one-half pounds per square yard.

Adhesive: The adhesive for cementing the lining felt to the wood floor as well as the linoleum to the lining felt shall be Nairn Green Label Paste as manufactured by Congoleum-Nairn Inc., and applied in accordance with manufacturer's instructions.

UNDERFLOOR CONDITION: The underfloor must be smooth and even. The wood floor (if new) shall be furnished and installed by another contractor. The wood floor shall be a double floor brought up to a surface . . . . . below the finished floor level. The lower boards of this double floor shall be thoroughly face-nailed to the joists and laid diagonally over them. The top boards shall be thoroughly dry and well-seasoned tongue and groove lumber not more than 4″ wide (3¼″ face), laid at right angles to the floor joists and toe-nailed with eight-penny steel-cut nails on 18″ centers.

On old wood floors, loose, defective or badly worn boards shall be replaced and face-nailed. On old or new floors any unevenness at butts or joints shall be scraped or planed smooth and even. Where it is necessary to smooth the underfloor by the sanding method, the wood floor shall be sealed after sanding with a thin coat of shellac.

No linoleum is to be laid under this specification over any wood floor which is below grade, directly in contact with the ground, or over an unexcavated area unless proper ventilation is provided between the underfloor and the ground.

APPLICATION OF MATERIALS: On the wood floor thus prepared, there shall be installed Nairn Lining Felt either saturated or unsaturated, which shall be securely cemented to the floor with Nairn Green Label Paste. The felt is to be laid with carefully butted joints—all cross joints to be staggered. The felt shall be carefully cut to fit around all vertical surfaces. The felt shall be thoroughly rolled into the adhesive with a linoleum roller weighing 150 pounds.

Over the lining felt thus installed Nairn . . . . . .Linoleum shall be applied. It shall be cut to fit the room accurately and neatly and shall be laid so as to have the fewest possible seams and in a manner to assure pattern match at longitudinal and cross seams. The linoleum shall be laid at right angles to the floor boards and care should be taken to avoid having the seams of the linoleum fall directly over the seams of the felt.

At junctions with vertical surfaces, the linoleum shall be carefully scribed so as to form a tight joint at these points. Allowance shall be made for ½ to ¾ inch lap at all seams for double cutting (see "NOTE" on next page for pattern goods).

The linoleum shall then be cemented all over to the felt, using Nairn Green Label Paste and shall be rolled immediately from the center of the sheet out with a roller, weighing 150 pounds, to obtain complete adhesion and to remove all air bubbles.

UNDERFLOORS
SUSPENDED WOOD
(Continued)

SEAMS: After the linoleum has thus been cemented to the floor with the seams properly lapped, the seams shall be cut through the two thicknesses and the edges of the linoleum shall then be embedded into the adhesive and thoroughly rolled to obtain a tight, even, workmanlike seam.

All seams and edges shall be thoroughly weighted down with sand bags to aid proper adhesion.

Where cross seams in linoleum are necessary, the linoleum should be cemented to the floor allowing approximately six inches lap where the seam is to be made. After the cemented area has been thoroughly rolled, the linoleum should be left in this lapped condition for at least one hour to permit any shrinkage that might occur. Paste should then be applied to the floor under the lap and the linoleum cut through both thicknesses using a straight edge as a guide. During this operation excessive bending of the linoleum should be avoided.

NOTE: Specifications for cutting seams where pattern goods are to be installed. The seams shall be only slightly lapped (not more than 3/16 inch). The edge of the upper sheet shall be used as a guide for cutting the lower sheet in order to secure a tight and sightly seam. This method of applying pattern goods must be followed to avoid distorting the pattern.

CLEANING OF LINOLEUM: The linoleum contractor shall remove all paste spots with a damp cloth, leaving the linoleum floor broom clean and in good condition.

PROTECTION: After the linoleum floors have been inspected and approved, the general contractor shall cover the linoleum with heavy paper in rooms where painting or other work is to be done as a protection until the building is ready for occupancy.

LIGHTING, HEATING, HOISTING AND POWER: Without cost to the linoleum contractor the owner or general contractor shall maintain a temperature of at least 70° F. during the time the linoleum work is being done. He shall light the rooms sufficiently for efficient work; he shall furnish hoisting service; he shall furnish the necessary power to clean and polish the floor.

GUARANTEE: The linoleum contractor shall guarantee the floor against all defects in material and workmanship for.....years from date of the completion of the job.

WALLS
GYPSUM WALL BOARD
(See Illustration Page 181)

Walls and ceilings, to receive Nairn Wall Linoleum as indicated on the plans or as called for in the specification, shall be of 1/2" recessed edge type Gypsum Wall Board utilizing a non-metallic tape and cement flush-joint system. Caution—do not use a loosely woven fabric tape.

FRAMING: Framing shall be in accordance with the manufacturer's specification. Special attention shall be given in properly lining up all studs and joists to provide a plane, smooth surface. Supplementary 2" x 4" headers shall be provided on ceilings and walls to receive all horizontal joints. Proper ground shall be provided where bathroom fixtures are to be installed.

For old plaster walls and ceiling, refer to the manufacturer's specification.

APPLICATION OF GYPSUM WALL BOARD: Gypsum Wall Boards shall be applied and nailed in accordance with the manufacturer's specification. Nails shall be cement coated 4d-1 3/8". All recessed edges shall be face out and all boards applied at right angles to the studs and joists. Panels shall be in one piece as far as possible.

Around recessed bathtubs, the joint between the tub and the boards shall be left open 1/4". This joint shall be grouted in by the linoleum contractor with a water resistant non-shrinking plastic compound.

WALLS
GYPSUM WALL BOARD
(Continued)

JOINT TREATMENT: A non-metallic tape and cement flush-joint system shall be applied in accordance with the manufacturer's specification. Make certain that the center of the tape is placed exactly over the joint. Two applications of cement and two sanding operations shall be employed to provide a surface perfectly smooth and flush with the face of the boards.

Fill all cut end joints and other openings and spot all nail heads with cement. When dry, sand lightly to a perfectly smooth surface flush with the boards. Repeat this application.

APPROVAL OF GYPSUM WALL BOARD: All Gypsum Wall Board walls and ceilings to receive Nairn Wall Linoleum shall be subject to the approval of the Wall Linoleum contractor and shall be thoroughly primed with one coat of Nairn Wall Primer, except around tubs where two coats shall be applied.

RESPONSIBILITY: Neither Congoleum-Nairn nor the Nairn Wall Linoleum contractor will accept any responsibility for the proper erection of the Gypsum Wall Board walls and ceilings that are to receive Nairn Wall Linoleum. Any defects appearing at a later date resulting from improper nailing, movement of the boards and improper joint treatment, shall be the responsibility of others.

GENERAL SPECIFICATIONS: On all walls and ceilings as indicated on the plans and/or as called for in the specifications, supply and install Nairn Wall Linoleum as follows:

MATERIALS: Wall Linoleum—The wall linoleum shall be Nairn Wall Linoleum, Pattern No. . . . . .

ADHESIVE: The adhesive for bonding wall linoleum to underwall shall be Nairn Wall Linoleum Adhesive No. 310.

WORKMANSHIP: Installation of Nairn Wall Linoleum shall be performed by an approved Congoleum-Nairn dealer and in accordance with manufacturer's prescribed methods.

TREATMENT OF WALL LINOLEUM AT CORNERS: Interior corners shall be rounded—or—squared; exterior corners shall be rounded—or—squared, as shown on the plans and/or in the specifications.

ALLOWANCE FOR THICKNESS OF WALL LINOLEUM: An allowance of approximately 1/8″ for thickness of wall linoleum shall be made at all abutments, such as wall fixtures (especially bathroom equipment), door jambs, window frames, baseboards, etc.

CLEANING: Upon completion of installation, the surface of the wall linoleum shall be thoroughly cleaned with lukewarm water and mild soap.

GENERAL CONDITIONS: No Nairn Wall Linoleum shall be applied in a room where the temperature is under 70° F.

BRIEF SPECIFICATIONS: On all plaster walls as indicated on plans and/or as called for in specifications, apply Nairn Wall Linoleum Pattern No. . . . . The wall linoleum shall be installed in accordance with the manufacturer's specifications.

ONE-PIECE COVE BASE AND BORDER: The linoleum contractor shall install a one-piece cove base and border of Nairn Linoleum; this border to extend 6″ on the floor and 6″ up the wall, or to alternate dimensions as specified by the architect. A Nairn Cove Strip shall be introduced at the junction between the wall and the floor before the cove base and border is installed. The cove base and border shall be neatly scribed to the floor and wall materials and shall be secured to the floor and wall with Nairn Green Label Paste.

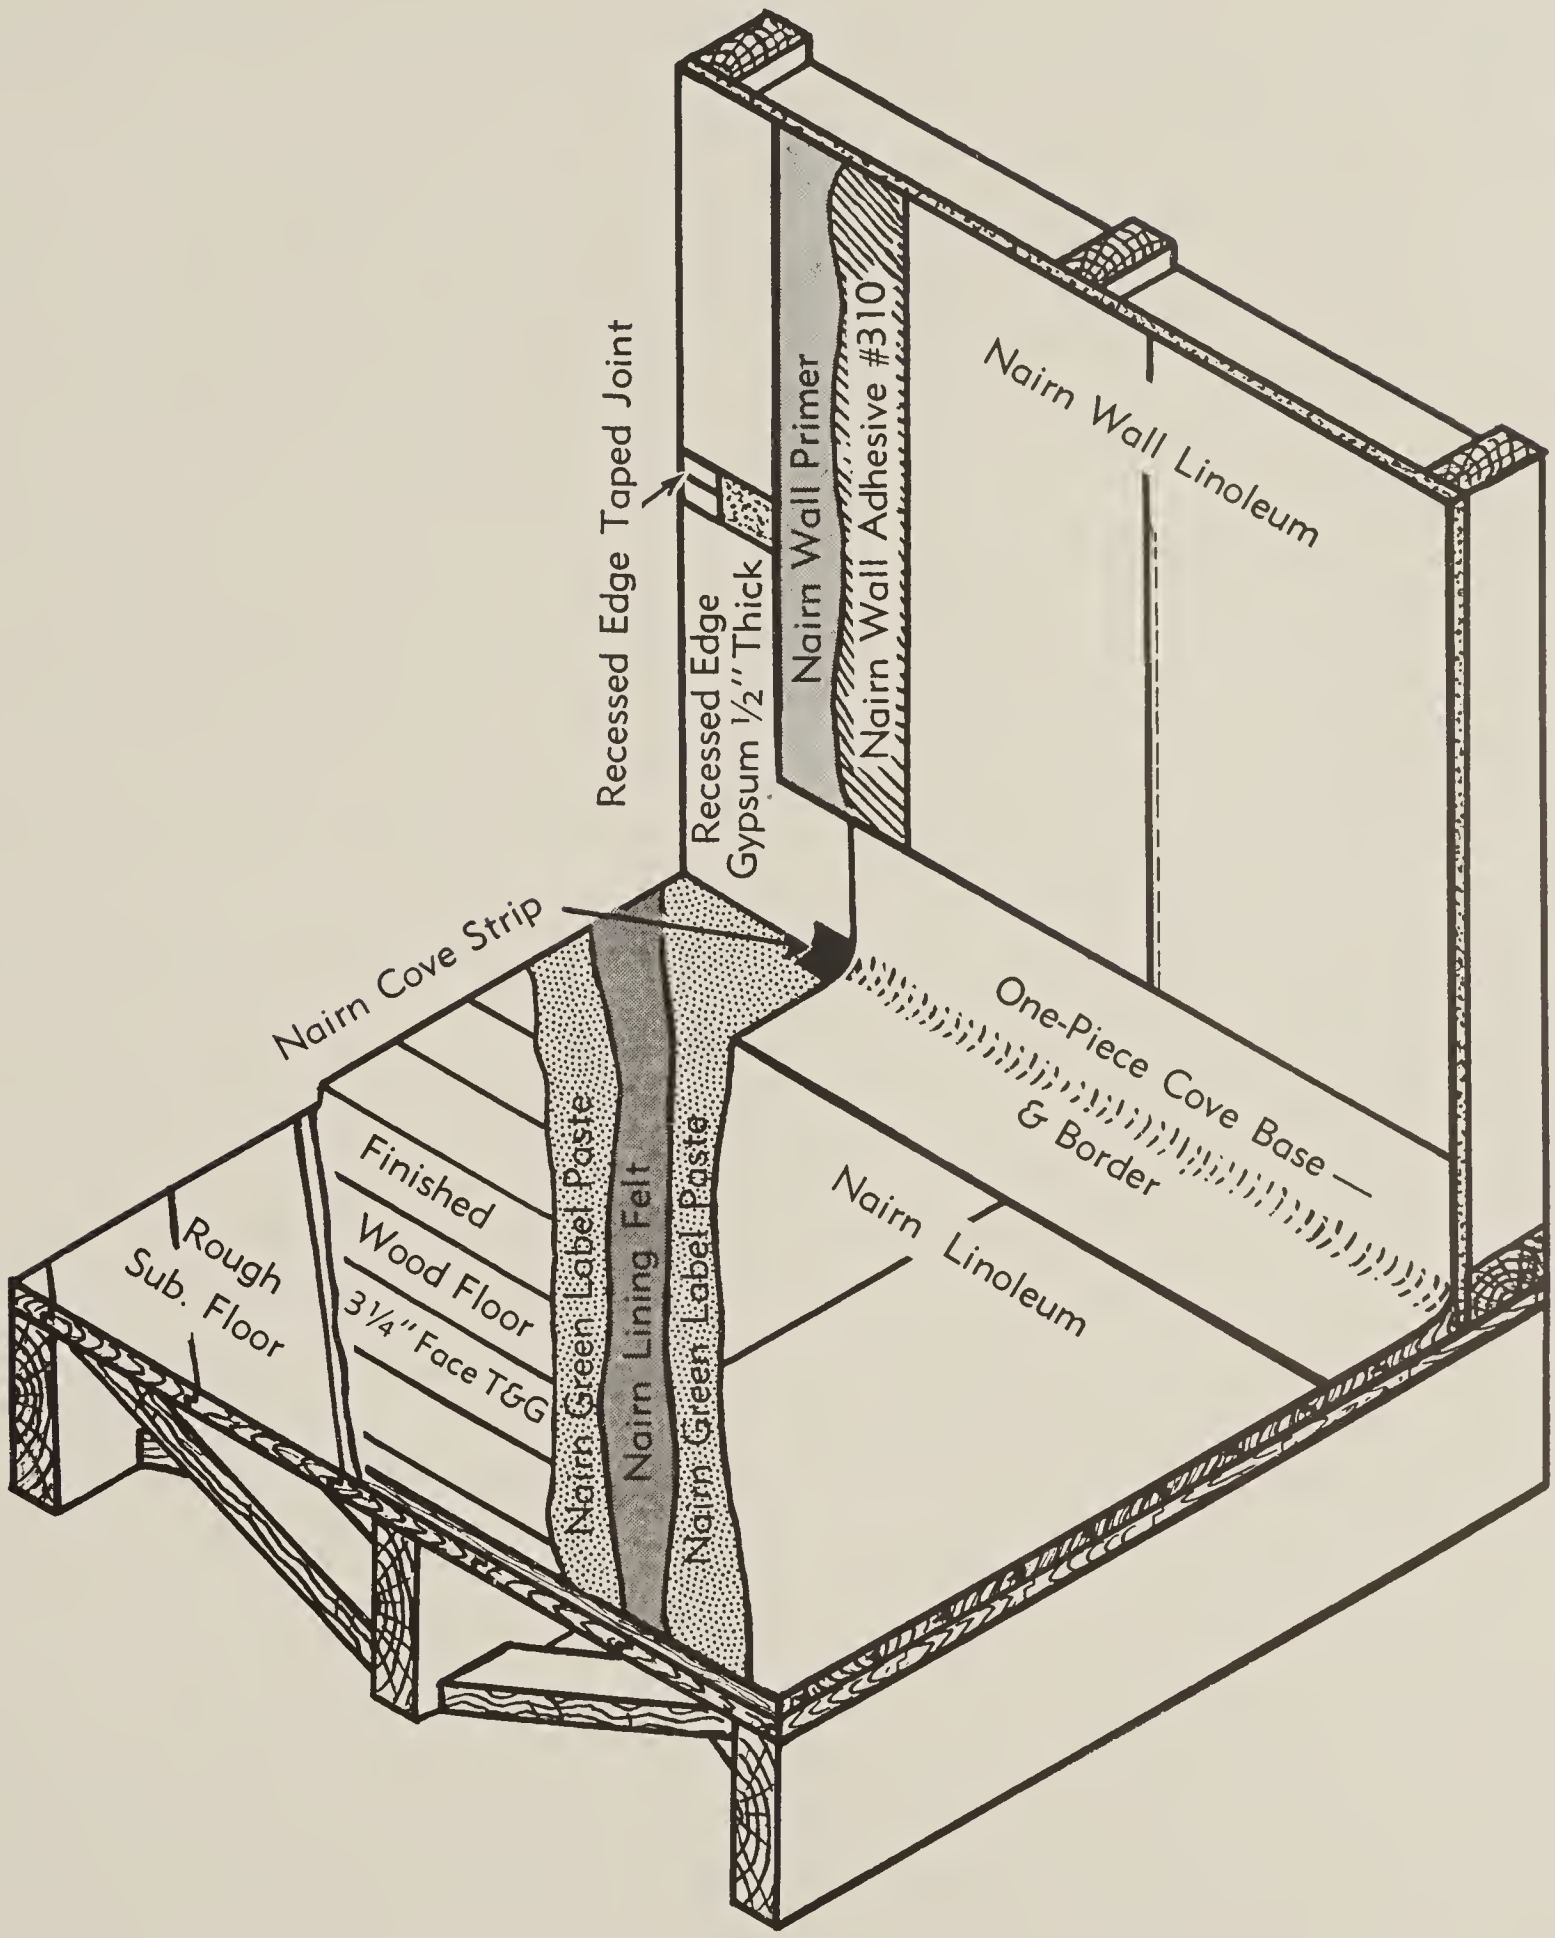

Specification for Installing:

Nairn Linoleum over Suspended Wood Underfloor.

Nairn Wall Linoleum over Recessed Edge Gypsum Walls.

UNDERFLOORS

PRE-CAST GYPSUM PLANK

The linoleum contractor shall furnish and install the materials hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn . . . . . Linoleum, thickness . . . . . , Pattern No. . . . . , and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Adhesive: The adhesive for adhering the linoleum to the concrete floor shall be Nairn Green Label Paste as manufactured by Congoleum-Nairn Inc.

The pre-cast gypsum plank subfloor shall be furnished to the linoleum contractor broom clean and satisfactorily dry. The gypsum planks shall be installed over the supporting members in accordance with the specifications prepared by the manufacturer of the product used. A leveling coat of a gypsum mix, not less than ¼", as produced by the manufacturer of the gypsum plank installed, shall be furnished with an even steel-troweled surface, free from inequalities and indentations. This gypsum leveling coat shall be thoroughly dry before the application of the linoleum is started.

APPLICATION OF MATERIALS: On the subfloor thus prepared, the linoleum shall be applied strictly in accordance with the specifications for the installation of Nairn Linoleum over concrete underfloors as given on page 174.

CLEANING OF LINOLEUM: The linoleum contractor shall remove all paste spots with a damp cloth, leaving the floor broom clean and in good condition.

PROTECTION: After the linoleum floors have been inspected and approved, the general contractor shall cover the linoleum with heavy paper in rooms where painting or other work is to be done as a protection until the building is ready for occupancy.

LIGHTING, HEATING, HOISTING AND POWER: Without cost to the linoleum contractor, the owner or general contractor shall maintain a temperature of at least 70° F. during the time the linoleum work is being done. He shall light the rooms sufficiently for efficient work; he shall furnish hoisting service; he shall furnish the necessary power to clean and polish the floor.

GUARANTEE: The linoleum contractor shall guarantee the floor against all defects in material and workmanship for . . . . . years from date of the completion of job.

WALLS

WAINSCOT HEIGHT

PLASTER OR GYPSUM WALL BOARD

On all walls install Nairn Wall Linoleum to a wainscot height as indicated on plans. Specifications for plaster or gypsum wall board backing shall be in accordance with manufacturer's specifications.

At upper edge of Nairn Wall Linoleum, which shall be trimmed to a straight line, install Nairn Wall Linoleum Cap Moulding, in color as specified by the architect; this cap moulding to be secured to the wall with Nairn Wall Linoleum No. 310 Adhesive.

STRAIGHT LINOLEUM BASE: After the completion of floors and walls, the linoleum contractor shall install a straight linoleum base 6" in height or as specified by the architect. This linoleum base shall be secured to the wall with Nairn Green Label Paste and the upper edge shall be rounded off with the back of the linoleum knife. Where necessary, headless brads shall be used to hold the linoleum to any inequalities in the wall.

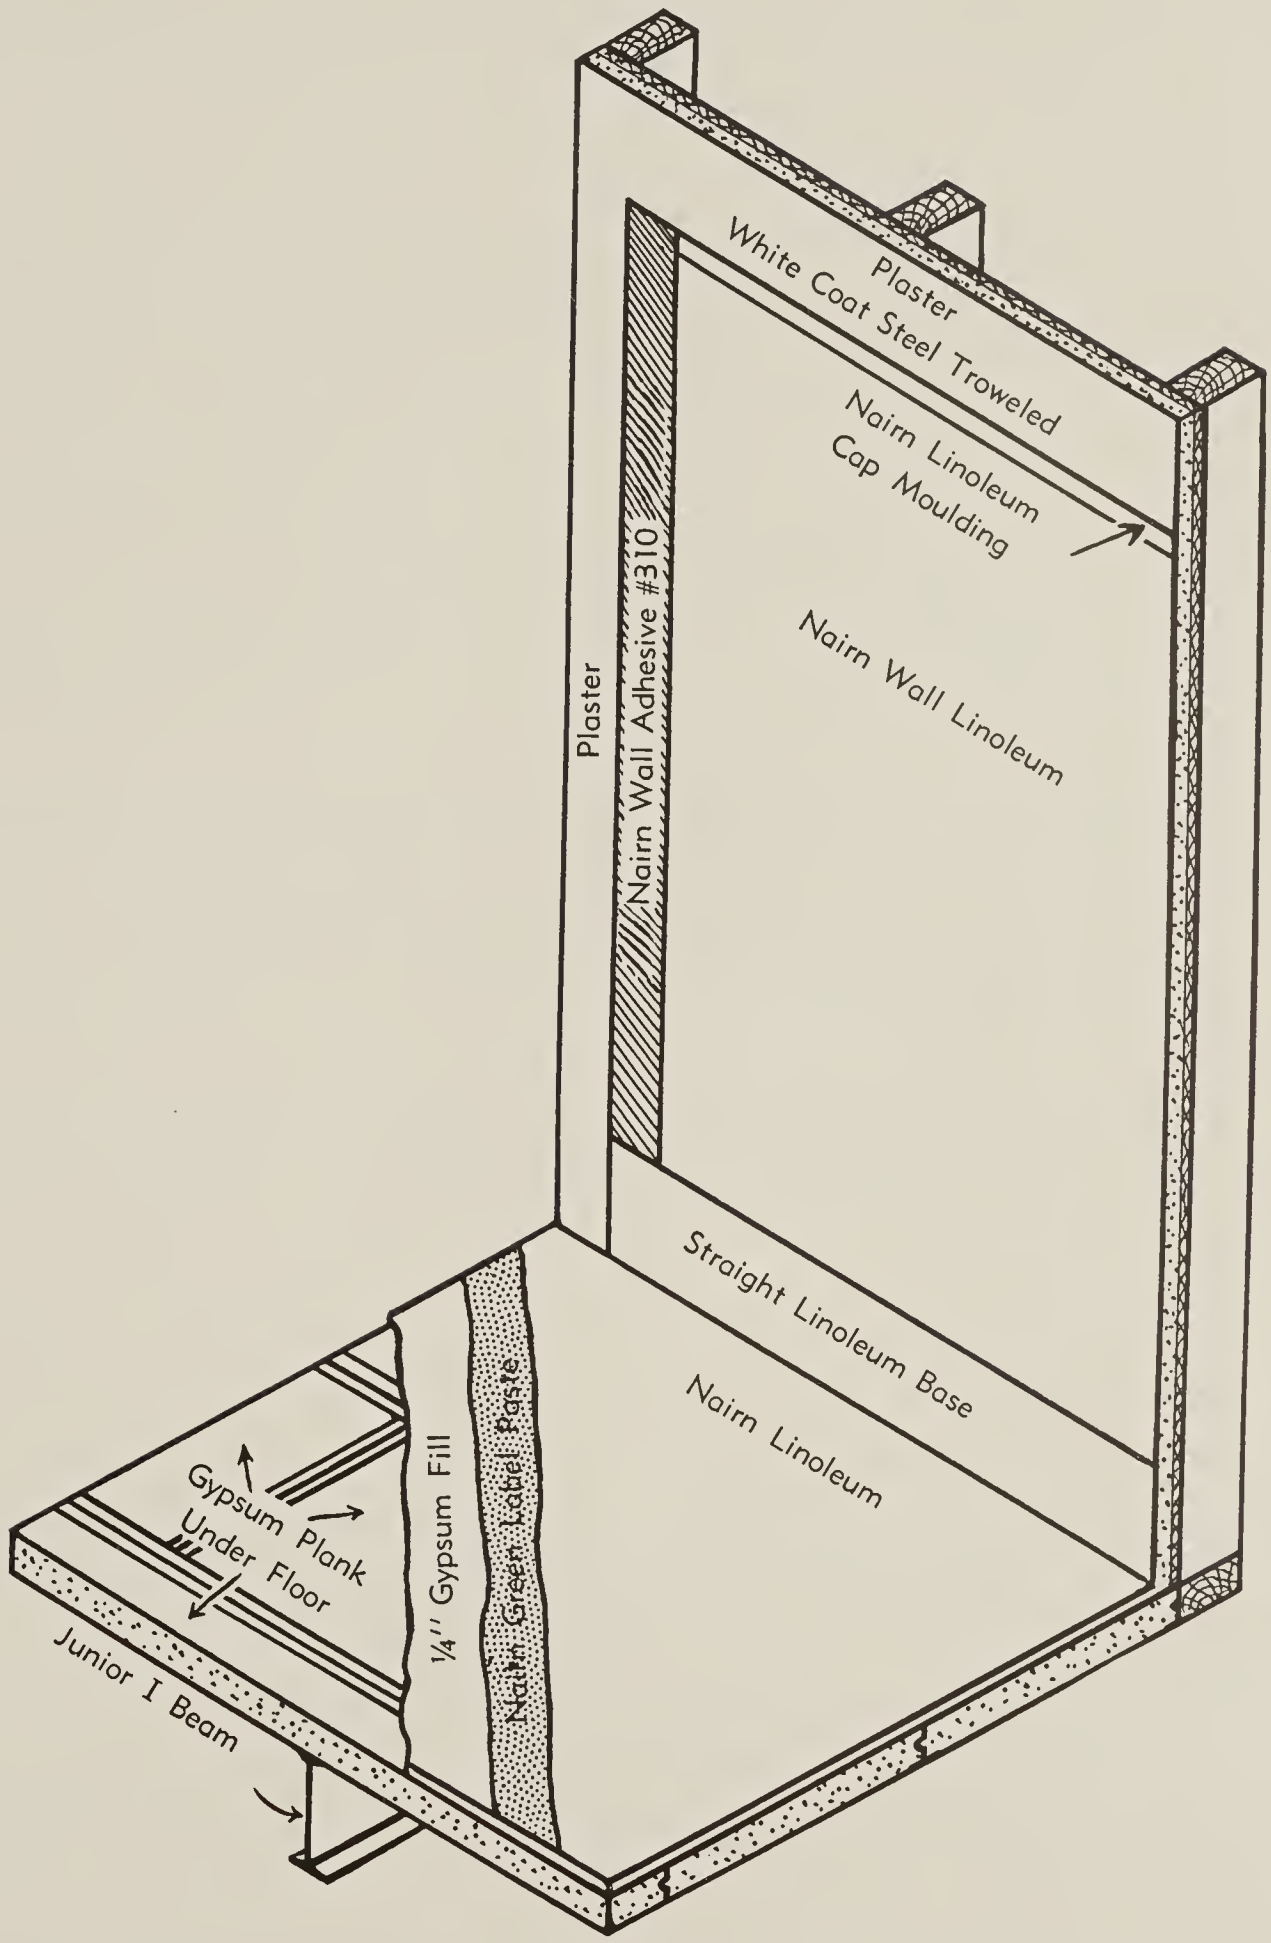

Specification for Installing:

Nairn Linoleum over Pre-cast Gypsum Plank Underflooring.

Nairn Wall Linoleum Wainscot Height with Nairn Linoleum Cap Strip.

UNDERFLOORS
ROUGH WOOD

The linoleum contractor shall furnish and install materials hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn . . . . . Linoleum, thickness . . . . . , Pattern No. . . . . , and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Lining Felt: The felt shall be either unsaturated Nairn Lining Felt, or asphalt saturated Nairn Lining Felt. The unsaturated lining felt shall weigh approximately one pound per square yard. The saturated felt shall have a minimum weight of approximately one and one-half pounds per square yard.

Adhesive: The adhesive for adhering the lining felt to the wood floor as well as the linoleum to the lining felt, shall be Nairn Green Label Paste as manufactured by Congoleum-Nairn Inc.

SUBFLOOR PREPARATION: Over the rough wood underfloor install ¼″ Fir Plywood. The sheets shall be 48″ x 48″. The joints in the succeeding rows of the plywood shall be staggered. The plywood shall be nailed to the rough wood underfloor with cement-coated, taper-headed nails 1¼″ long which shall be spaced 6″ on all edges and 12″ through the body of the plywood in staggered rows. As each succeeding sheet of plywood is installed, the contact between the edges shall be snug and complete.

APPLICATION OF MATERIALS: On the wood subfloor thus prepared, the linoleum contractor shall install Nairn Linoleum, strictly in accordance with the specifications for the installation of same over wood underfloors as given on Page 178.

WALLS
WINDOW OPENINGS

As indicated on the plan and/or as called for in the specifications, the mason contractor shall furnish at all window openings, rounded corners on sides and head. The radius of these corners shall be not less than 1″. The finish of the plaster shall be a white coat, steel-troweled, which, when dry, shall be firm, hard and smooth.

APPLICATION OF NAIRN WALL LINOLEUM: At these window openings the wall linoleum contractor shall apply the Nairn Wall Linoleum over the curved surfaces and into the return. The window stop, whether metal or wood, shall be applied over the top of the wall linoleum as a retaining frame.

STRAIGHT LINOLEUM BASE: After the completion of floors and walls, the linoleum contractor shall install a straight linoleum base 6″ in height or as specified by the architect. This linoleum base shall be secured to the wall with Nairn Green Label Paste and the upper edge shall be rounded off with the back of the linoleum knife. Where necessary, headless brads shall be used to hold the linoleum to any inequalities in the wall.

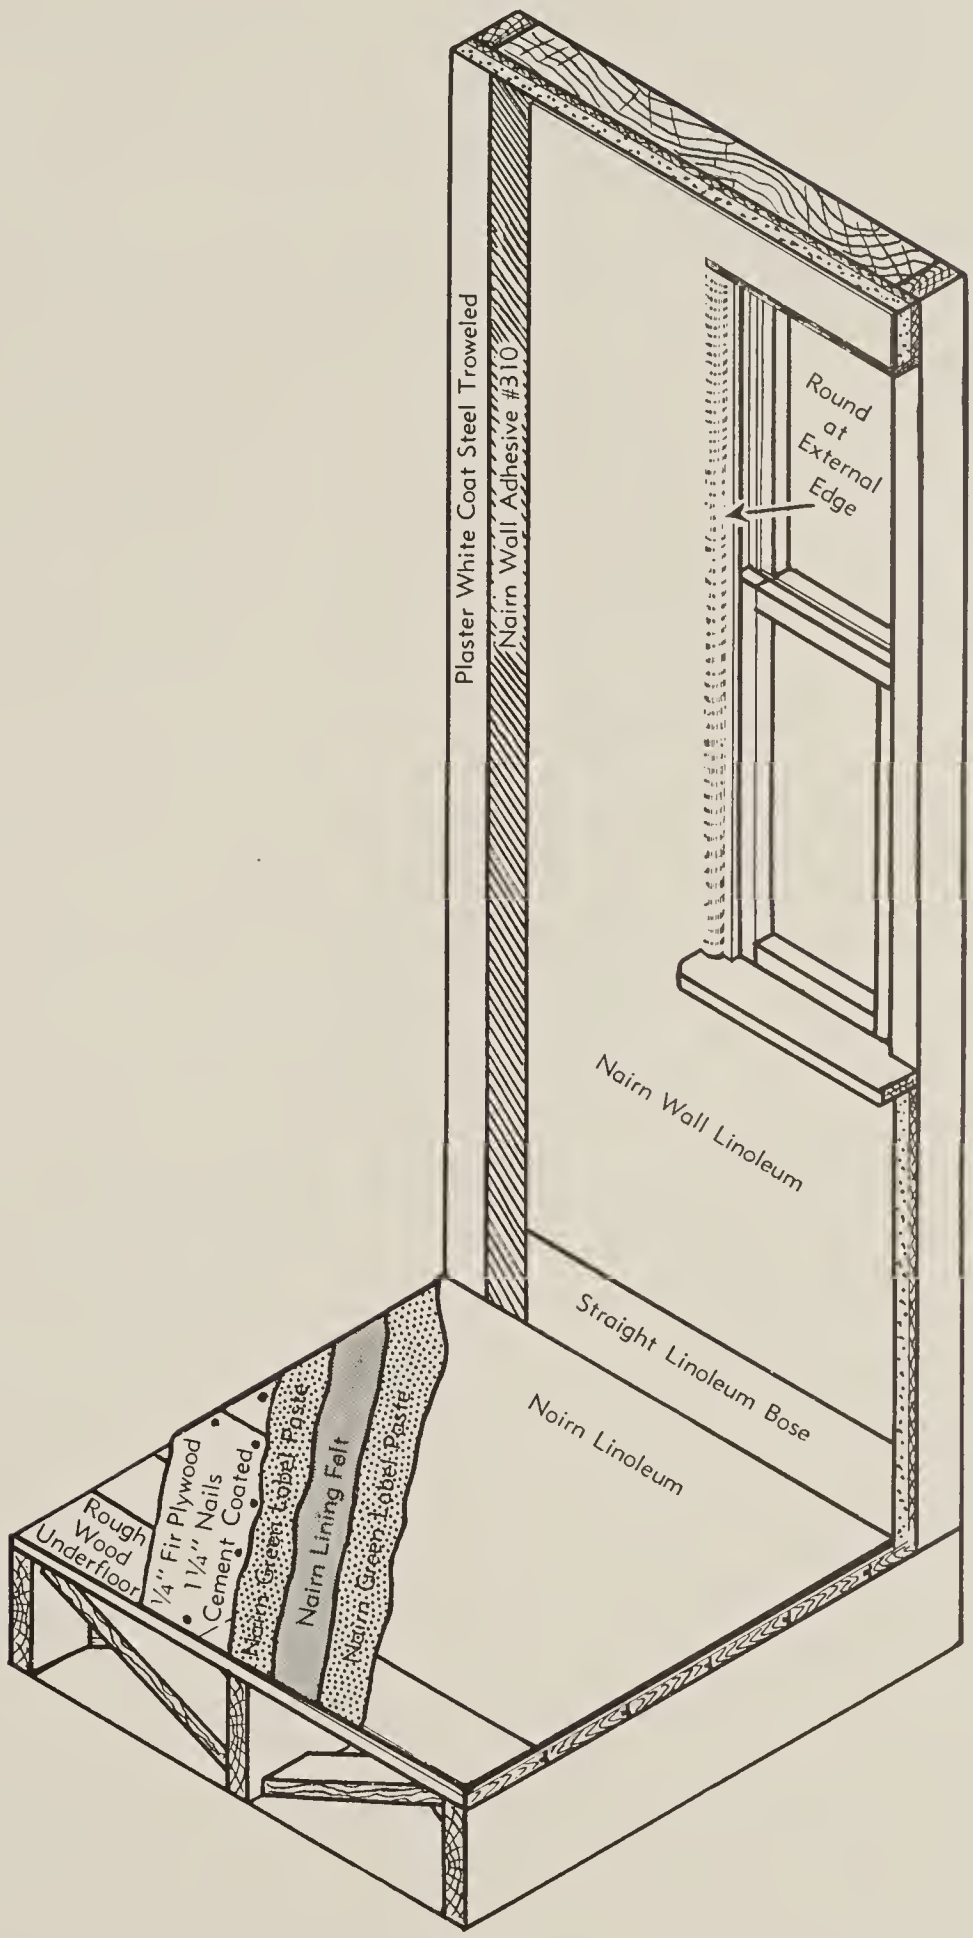

Specification for Installing:

Nairn Linoleum over Rough Wood Underfloors.

Nairn Wall Linoleum at Rounded Recessed Window Openings.

UNDERFLOORS
WOOD ON OR BELOW GRADE

The linoleum contractor shall furnish and install the material hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn . . . . . Linoleum, thickness . . . . . , Pattern No. . . . . , and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Lining Felt: The felt shall be either unsaturated Nairn Lining Felt, or asphalt saturated Nairn Lining Felt. The unsaturated lining felt shall weigh approximately one pound per square yard. The saturated felt shall have a minimum weight of approximately one and one-half pounds per square yard.

Adhesive: The adhesive for adhering the lining felt to the wood floor as well as the linoleum to the lining felt, shall be Nairn Green Label Paste as manufactured by Congoleum-Nairn Inc.

SUBFLOOR PREPARATION: On the concrete subfloor which is in contact with the ground and below grade, there shall be floated a single wood subfloor, using stringers not less than 2″ x 2″ and tongue and grove 13/16″ thick 3¼″ face boards thoroughly dry and well seasoned. There shall be introduced at the two walls where the ends of the stringers occur, register ventilators which shall be set into openings in the floor boards, and protruding approximately 3/16″. These ventilators shall be of sufficient length to provide ventilation for the area under two stringers and shall occur at intervals so that each space between stringers shall carry ventilation at both walls.

APPLICATION OF MATERIALS: On the wood subfloor thus prepared, the linoleum contractor shall install Nairn Linoleum, strictly in accordance with the specifications for the installation of linoleum over wood underfloors as given on page 178. At the registers the linoleum shall be carefully scribed to fit all four sides.

WALLS
EXPOSED

On all exposed walls, either in contact with the earth or above grade, a dampcourse shall be provided on the inner surface of the masonry wall, and the backing for the wall linoleum shall be furred out in an approved manner a distance of not less than ½″ from the masonry wall.

APPLICATION OF NAIRN WALL LINOLEUM: On the wall thus prepared, the wall linoleum contractor shall install Nairn Wall Linoleum, strictly in accordance with the specification prepared by the manufacturer.

STRAIGHT LINOLEUM BASE: After the completion of floors and walls, the linoleum contractor shall install a straight linoleum base 6″ in height or as specified by the architect. This linoleum base shall be secured to the wall with Nairn Green Label Paste and the upper edge shall be rounded off with the back of the linoleum knife. Where necessary, headless brads shall be used to hold the linoleum to any inequalities in the wall.

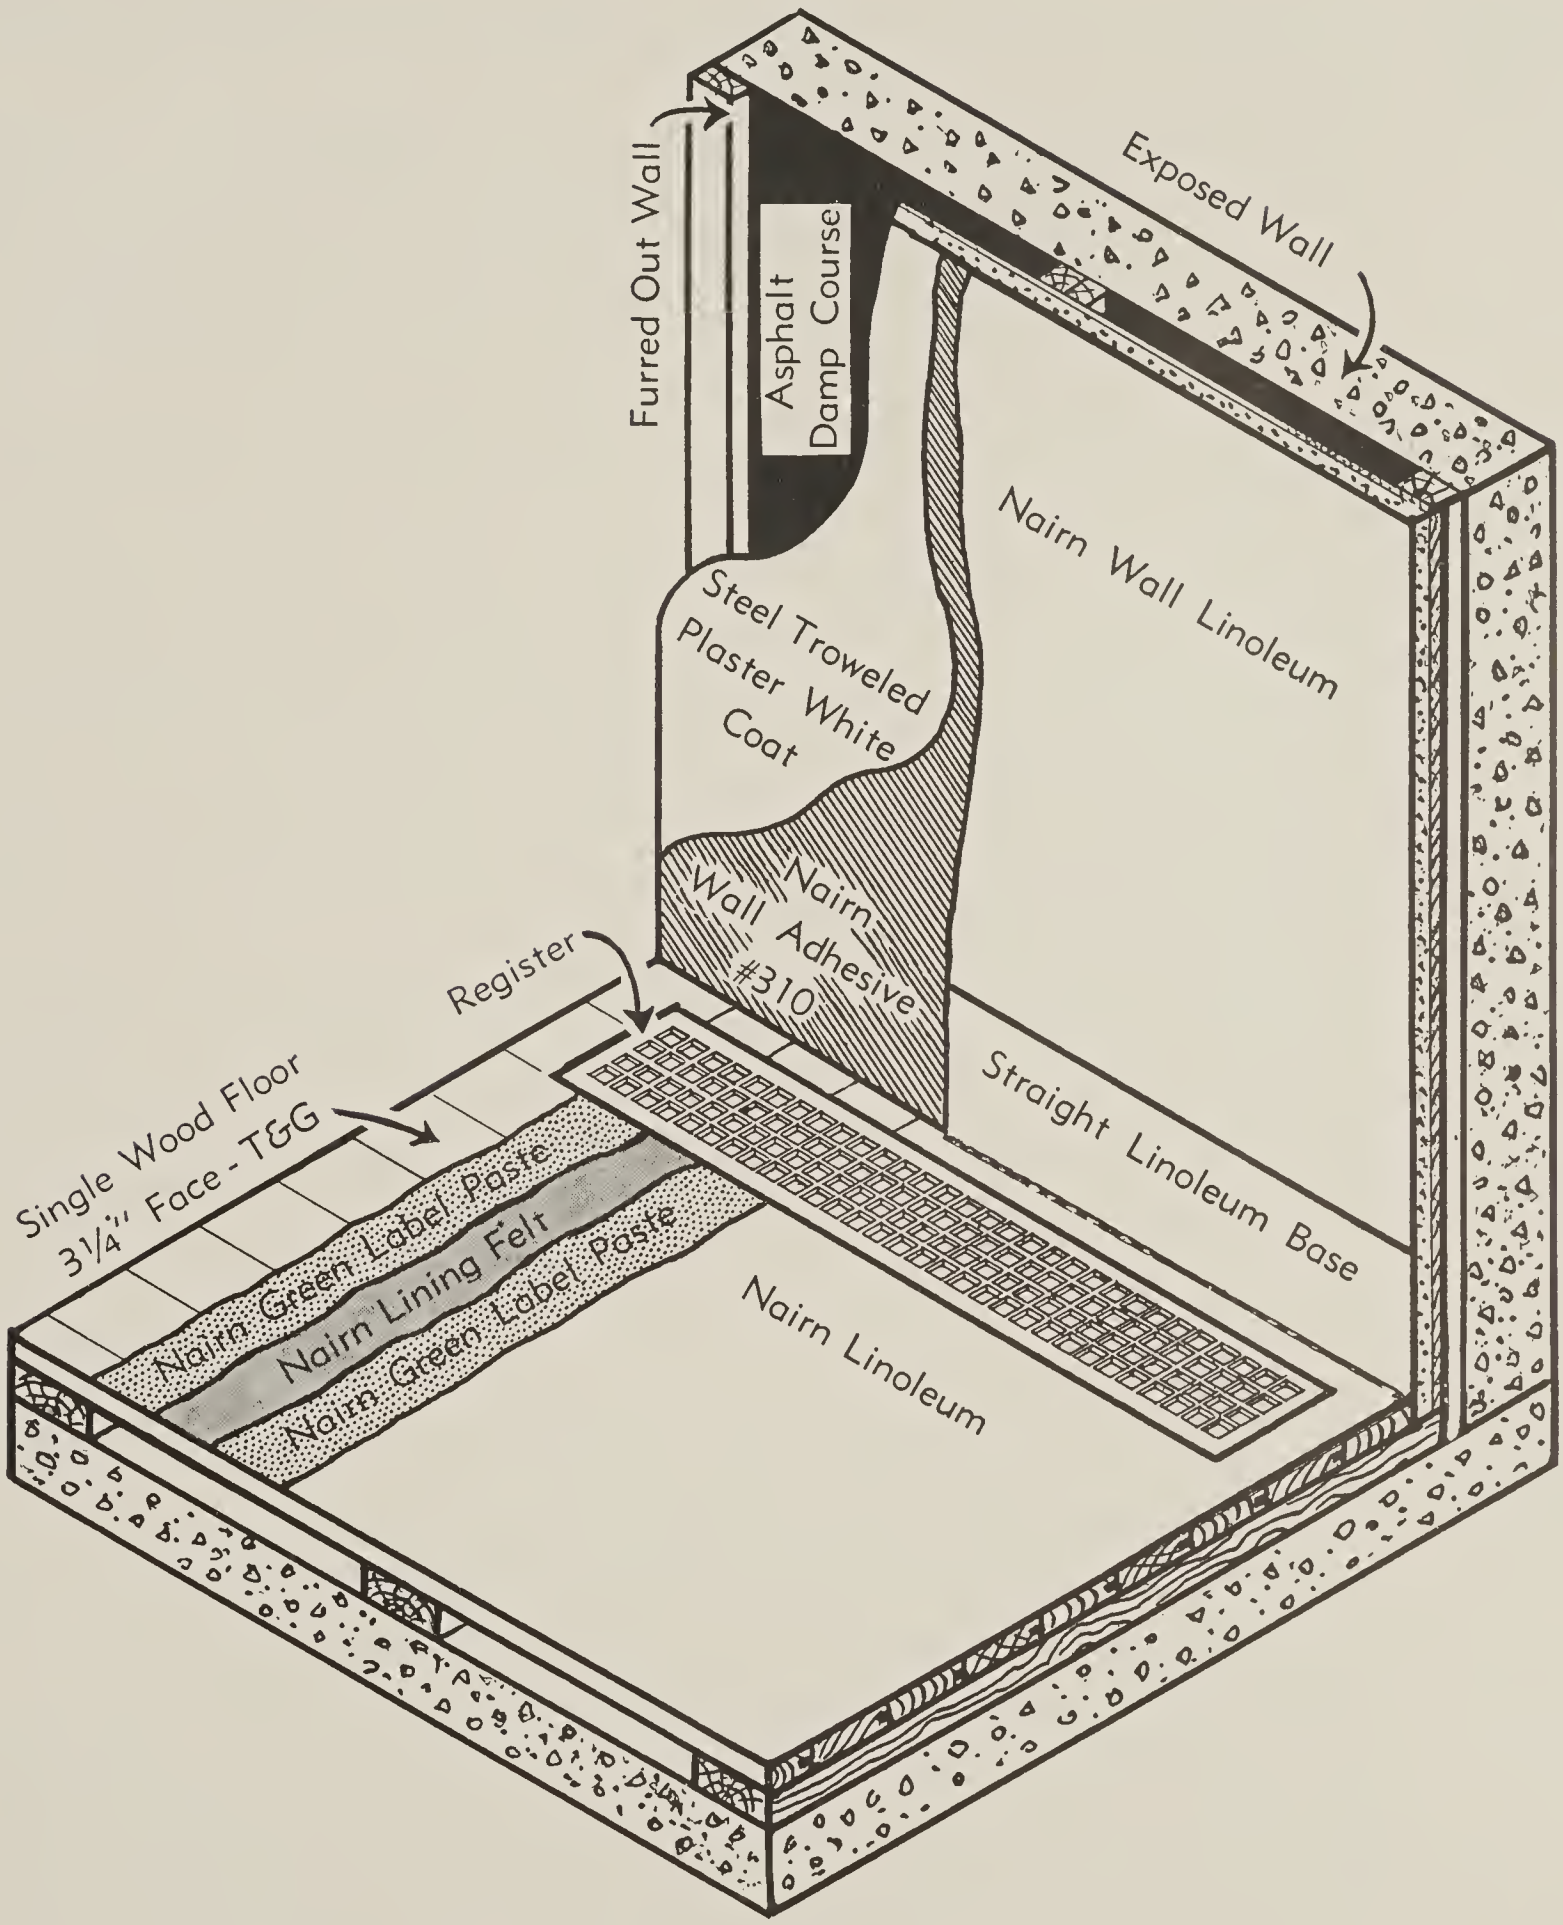

Specification for Installing:

Nairn Linoleum over Wood on or Below Grade.

Nairn Wall Linoleum on Exposed Walls.

UNDERFLOORS

CONCRETE ON GRADE

The linoleum contractor shall furnish and install the materials hereinafter specified on all subfloor areas as follows:

MATERIALS:

Linoleum: The linoleum used to be Nairn . . . . . Linoleum, thickness . . . . . , Pattern No. . . . . , and shall be delivered on the job in full rolls, and shall conform to Federal Specifications LLL-L-351 or LLL-L-361. Every roll must be marked with the maker's name and grade of the linoleum. This material shall be subjected to a continuous temperature of 70° F. for at least 24 hours before installation.

Adhesive: The adhesive for adhering the linoleum to the concrete floor shall be Nairn Damp-Proof Cement, as manufactured by Congoleum-Nairn Inc.

SUBFLOOR CONDITION: The concrete subfloor in contact with the ground shall be furnished to the linoleum contractor broom clean and free of surface moisture. The concrete underfloor must be free of all foreign matter.

The concrete floor must be brushed with a steel brush where any loose-adhering film of lime exists and shall then be thoroughly swept before applying the linoleum. If paint has been used, it must be removed from the surface through the use of a 10% lye solution and then a thorough rinsing with clear water, allowing the area to dry overnight. The area shall then be cleaned with kerosene, cleaning small sections at a time, wiping up all of the dirty kerosene with a rag or mop and recleaning the area with fresh kerosene to thoroughly remove all of the paint. Where soap, grease or oil has been used freely on the concrete floor, the area must be thoroughly cleaned with kerosene as indicated above. If paints of the concrete type cannot be removed with the lye treatment, they must be removed with mechanical means.

APPLICATION OF MATERIALS: On the concrete subfloor thus prepared, the linoleum contractor shall install Nairn Linoleum, using Nairn Damp-proof Cement. Nairn Damp-proof Cement should be applied with a toothed trowel and spread in a uniform and continuous film with a coverage of not more than 8 sq. yds. per gallon. Do not spread over more area at one time than can be covered with linoleum within ten minutes after troweling. The cement should be cross-troweled to obtain perfect contact with the underfloor and also to obtain complete and uniform coverage, leaving no holes or spots through which moisture can penetrate from the underfloor. After the cement is troweled, apply the linoleum promptly and roll thoroughly. Seams and scribed joints must be cut open to allow for expansion which will occur within a few days. Sand bags must be used on seams.

WALLS

DOORS AND DOOR RECESSES

The mason contractor shall provide at the side and top of all door openings, a rounded corner, the radius of which shall be not less than 1″. The plaster shall be of good quality white coat, steel-finish, which, when dry, shall be firm, hard and smooth.

The carpenter contractor shall provide a quarter-round or square moulding which shall act as a retaining frame to hold the edge of the wall linoleum where it abutts the door area.

The carpenter contractor shall furnish all doors with a smooth firm surface of plywood or hardboard wall product properly recessed at all four edges to receive metal edge moulding.

APPLICATION OF MATERIALS: The wall linoleum contractor shall install Nairn Wall Linoleum in accordance with standard practice as prescribed by the manufacturer over the rounded surfaces thus prepared. The wall linoleum contractor shall install Nairn Wall Linoleum to the surface of the doors, providing a metal edging as specified by the architect at all four edges. This metal edging shall have a lip of the proper depth to receive the wall linoleum (approximately 1/16″) and shall be equipped with a flange for securing it to the surface of the door so that the brads or screws shall be concealed after the wall linoleum is installed.

STRAIGHT LINOLEUM BASE: See specifications page 186.

DOOR THRESHOLD

Where the linoleum is used as a border, the linoleum contractor shall scribe carefully to all contours of plinth block, door jamb and saddle so that a tight joint is secured. Cross seams in the border shall occur at the outside edge of the plinth block.

NAIRN LINOLEUM — INSTALLATION SPECIFICATIONS

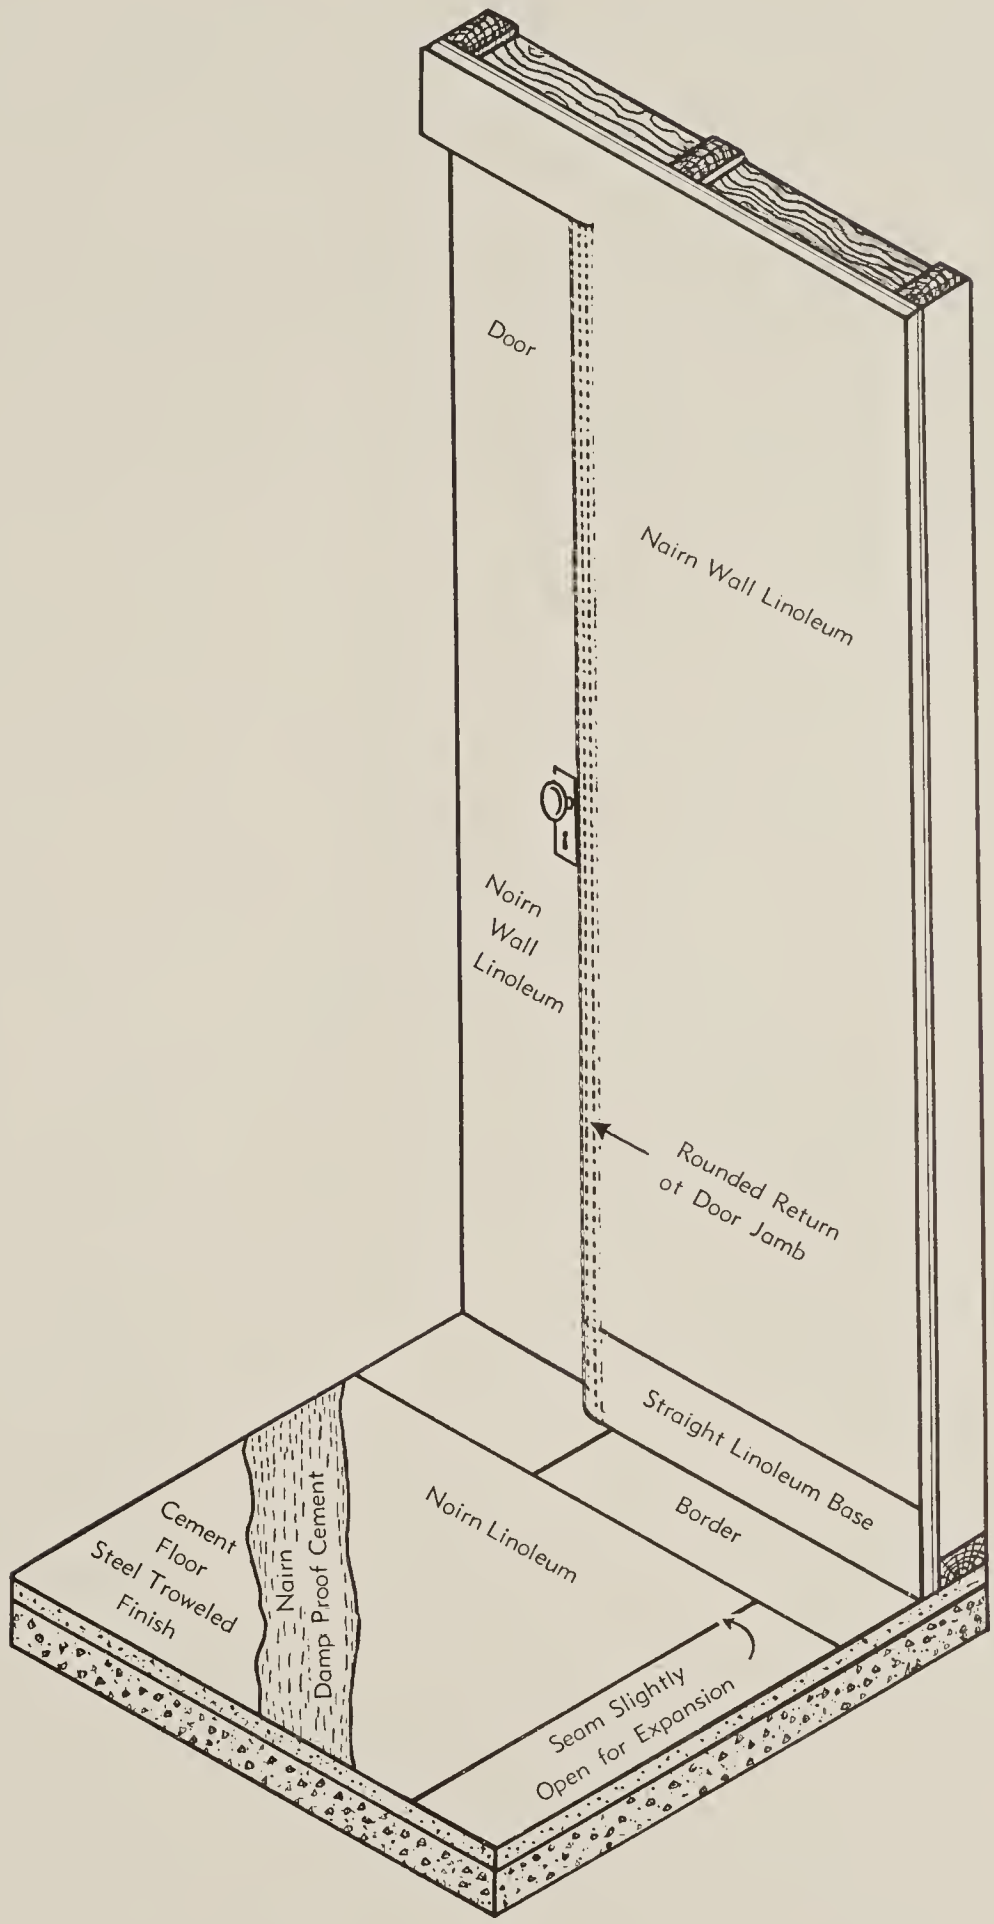

Specification for Installing:

Nairn Linoleum over Concrete Underfloor on Grade.

Nairn Wall Linoleum on Doors and over Plaster Walls.

FLOORS AND WALLS

WITH TERRAZZO BASE AND BORDER

The terrazzo contractor shall furnish at the edge of the terrazzo border a brass dividing strip embedded in the cement. The level of the cement shall be the exact depth of the lip provided on the brass dividing strip, against which the linoleum is to be scribed. This lip shall be either 1/8" or 3/16", depending upon the gauge of the linoleum to be used.

INSTALLATION OF MATERIALS: The linoleum contractor shall install Nairn Linoleum strictly in accordance with the specification for the application of linoleum over concrete underfloors (see page 174) as prepared by the manufacturer, and shall carefully scribe all edges in contact with the brass strip with an underscriber, so that a tight joint is secured at these points.

The Nairn Wall Linoleum shall be applied strictly in accordance with the manufacturer's specifications for application over type of wall involved and shall be carefully scribed to upper edge of terrazzo bases.

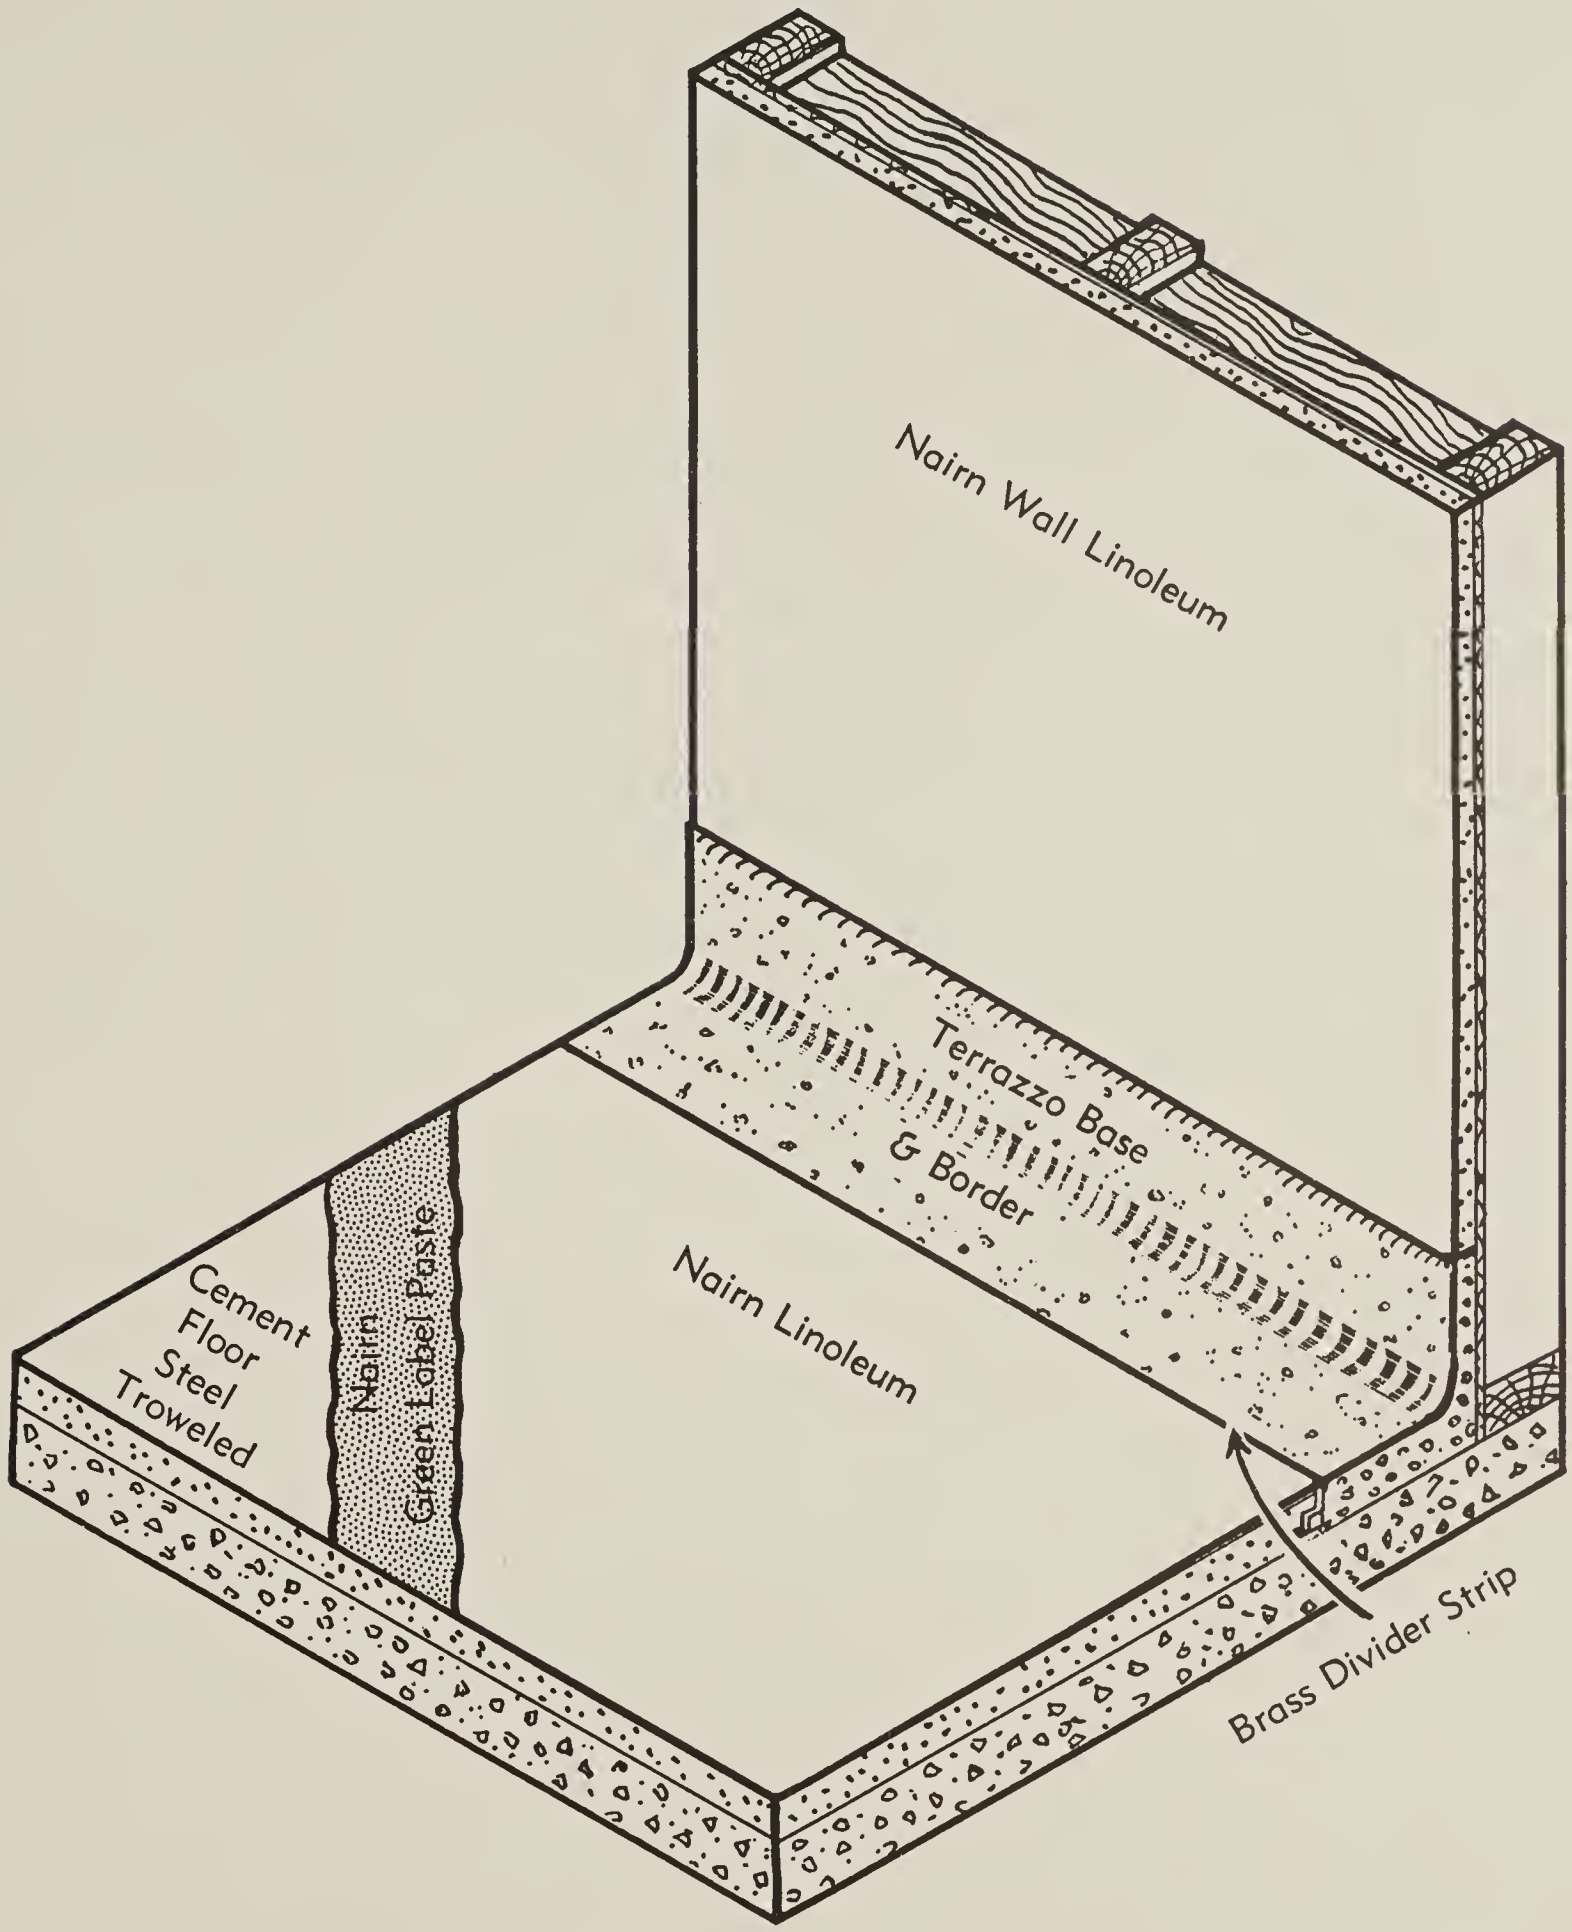

Specification for Installing:

Nairn Linoleum over Suspended Concrete with Terrazzo Border.
Nairn Wall Linoleum against Terrazzo Base.

STAIRS

TREADS AND RISERS

CONCRETE TREAD: The linoleum contractor shall install Nairn cove strip at the junction of the riser with the back ot tread. The linoleum contractor shall then install Nairn Linoleum as specified by the architect over the entire area of the tread and riser in one-piece construction, with a cove at the junction between vertical and horizontal area. Nairn Green Label Paste shall be used for cementing the linoleum to the concrete. The linoleum contractor shall furnish a proper metal nosing at the edge of the tread as specified by the architect.

STEEL TREAD AND RISER: Specifications the same as for concrete.

WOOD TREAD AND RISER USING METAL NOSING AT TREAD EDGE: The linoleum contractor shall install Nairn cove strip at the junction between riser and the back of tread. The linoleum contractor shall then install Nairn Lining Felt over the tread area and, over this, shall install Nairn Linoleum, using Nairn Green Label Paste for the adhesive. The linoleum shall extend in one piece from the edge of the tread to the upper edge of the riser. Proper metal nosing shall be provided at the tread edge by the linoleum contractor.

WOOD TREAD AND RISER WITH RECESSED TREAD AND STRAIGHT LINOLEUM RISER: The linoleum contractor shall install Nairn Lining Felt over the wood tread. This felt shall abutt the recessed edge of the tread. Over the lining felt the linoleum contractor shall install Nairn Linoleum, as specified by the architect, which shall be scribed carefully to the recessed edge and shall extend back to the face of the riser. The linoleum contractor shall then install the straight linoleum base the full height of the riser, carefully scribed to the linoleum installed on the tread. No metal nosing is necessary with this construction. The linoleum contractor shall use Nairn Green Label Paste for this work.

NAIRN LINOLEUM — INSTALLATION SPECIFICATIONS

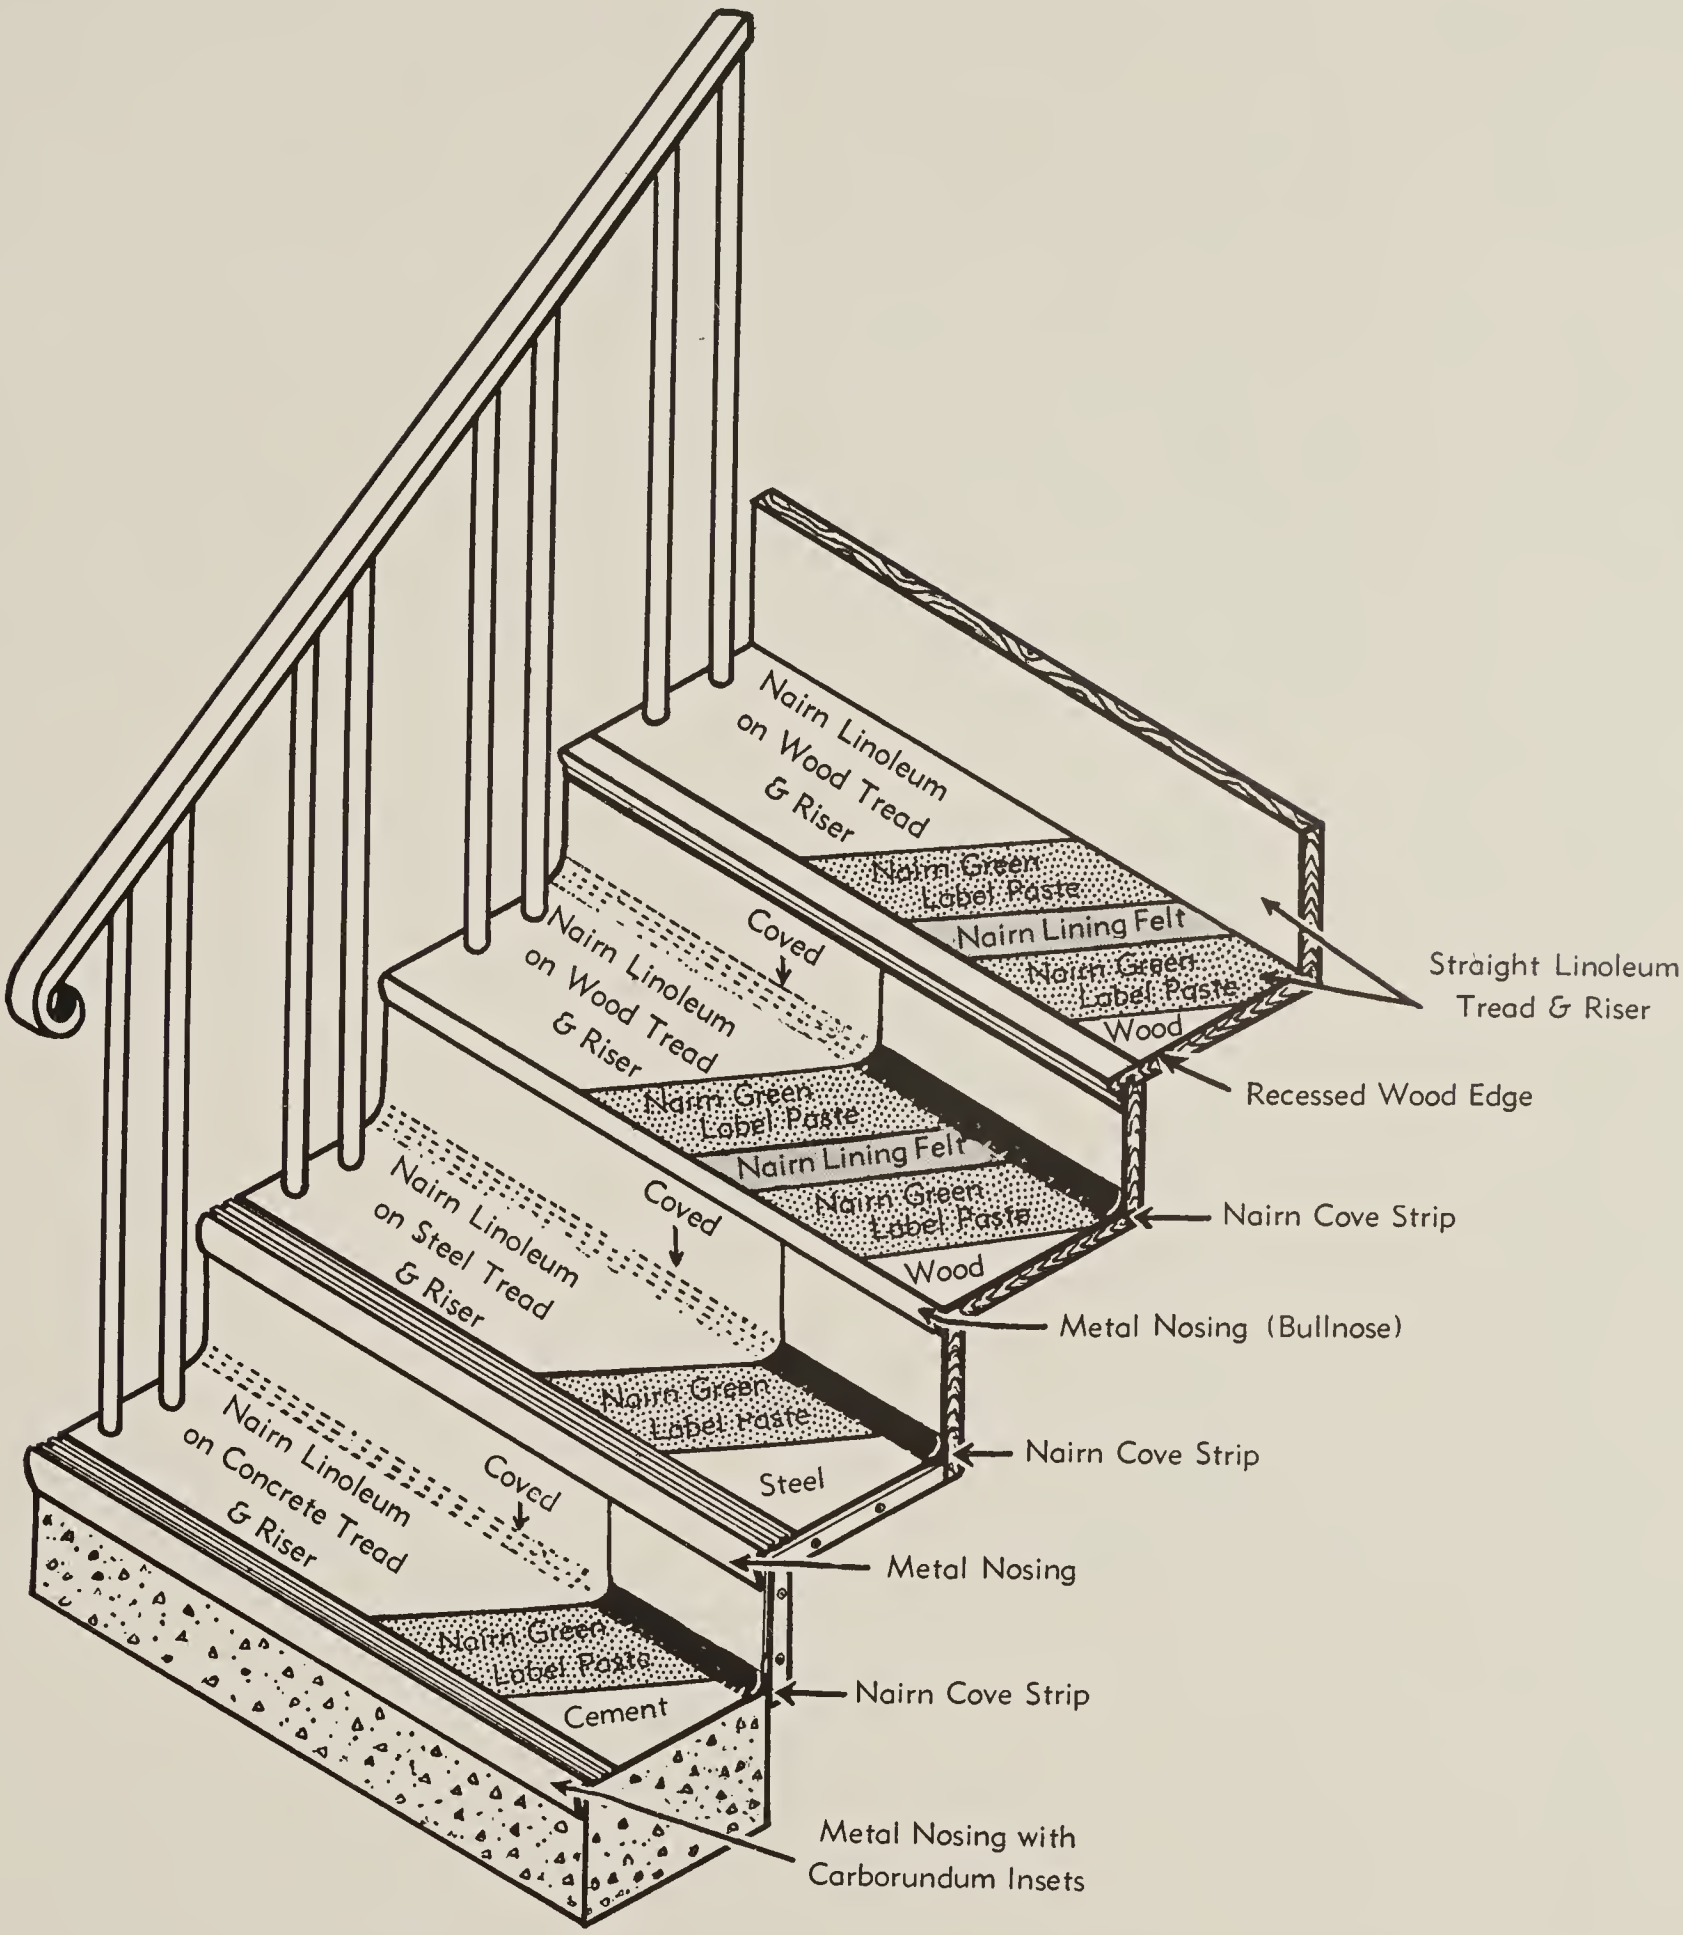

Specification for Installing:
Nairn Linoleum on Various Types of Stair Treads and Risers.

WALLS AND CEILING

BATHROOM AREAS

The mason contractor shall provide on walls and ceiling the proper plaster backing which shall be of a good quality white-coat, steel finish, which, when dry, shall be firm, hard and smooth.

APPLICATION OF MATERIALS: The wall linoleum contractor shall sand lightly a strip of the plaster abutting the tub area and up to a height of approximately 8″ above the tub and then apply two coats of Nairn Wall Primer, allowing the first coat to dry thoroughly before applying the second. The tub area which joins the wall shall be protected during this operation with a paper tape which shall be removed after the primer has been applied and dried.

The wall linoleum contractor shall then install Nairn Wall Linoleum in accordance with the standard practice as prescribed by the manufacturer on all plaster areas of wall and ceiling. After the walls and ceiling areas have been properly cut where the cove and feature strips are to be inserted at the junction between the vertical and ceiling areas, the areas between the two trimmed areas shall be spread with Nairn Wall Adhesive No. 310 and the feature strips and filler cove inserted and rolled on vertical and ceiling areas so that proper adhesion is secured and all air blisters are removed. Mitre joints shall be cut at inside and outside corners where the material laps to provide a sightly seam at these points.

NAIRN LINOLEUM — INSTALLATION SPECIFICATIONS

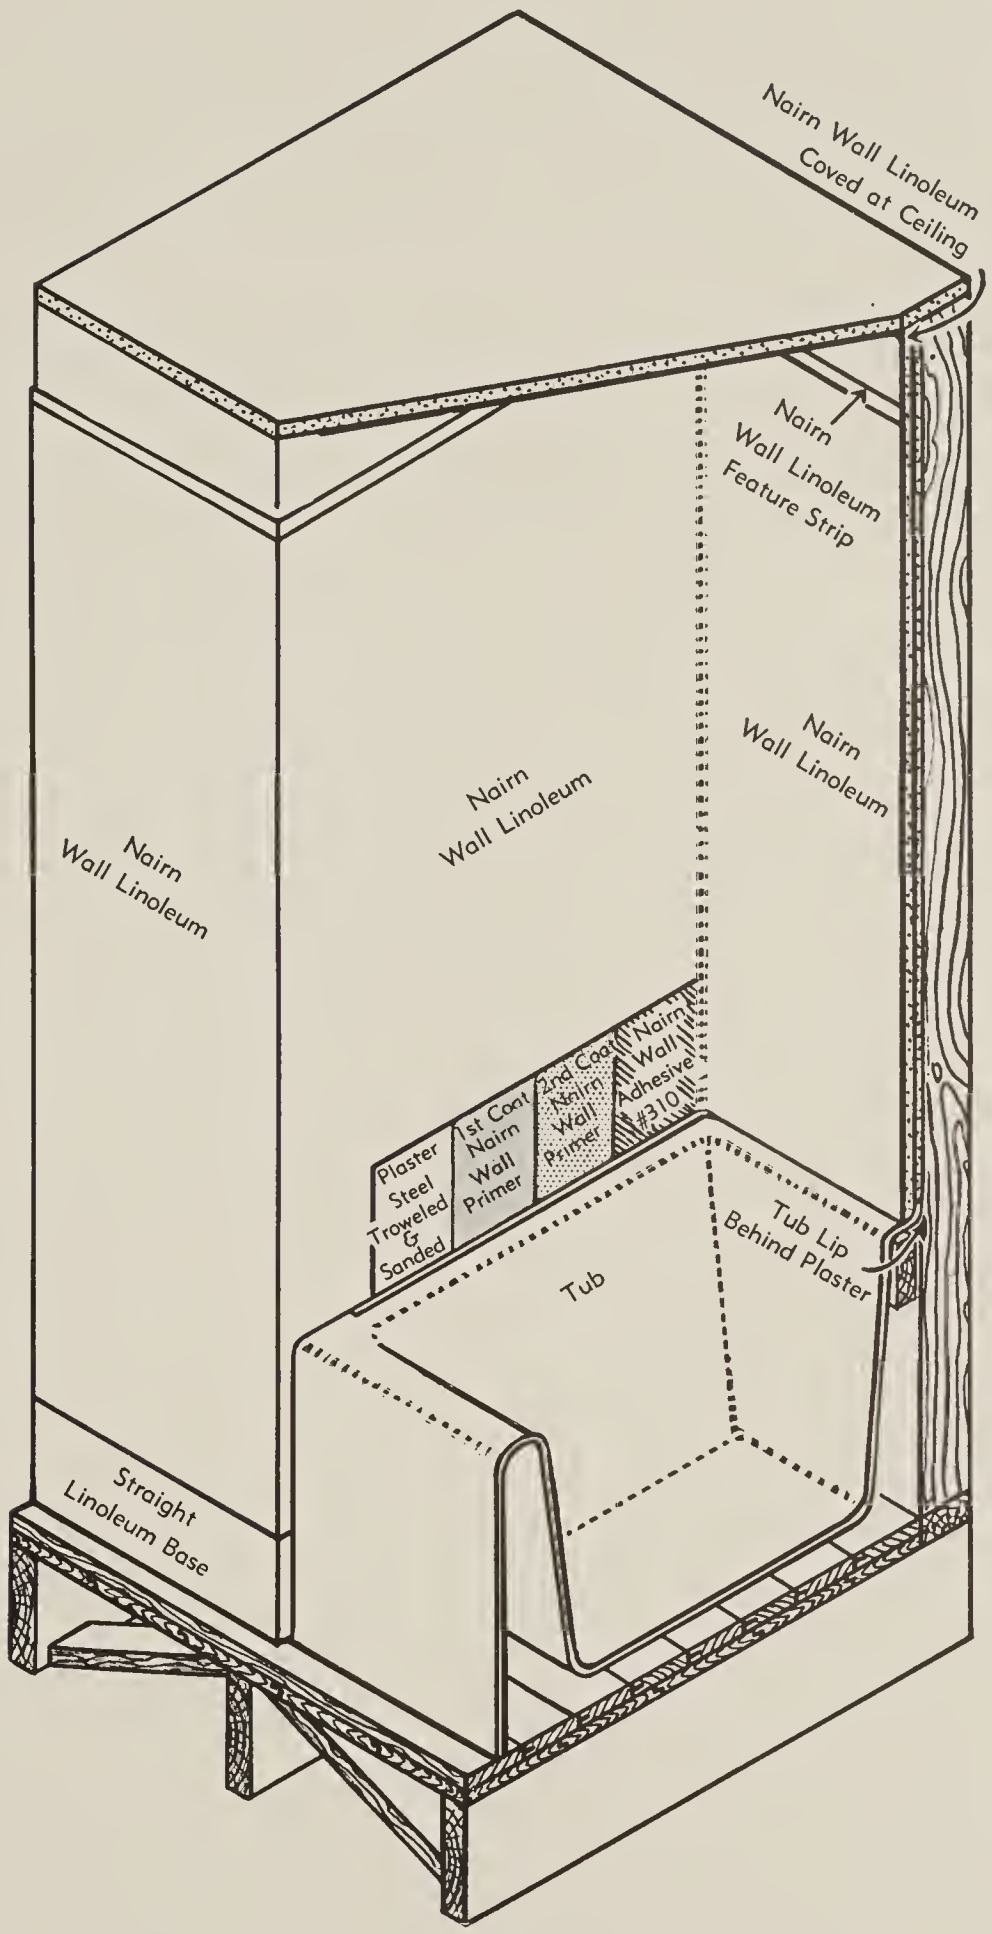

Specification for Installing:
Nairn Wall Linoleum on Bath Wall and Ceiling.

WALLS AND CEILING

STANDING SHOWER STALLS

In standing shower stalls, the walls and ceilings to receive Nairn Wall Linoleum as indicated on the plans or as called for in the specifications, shall be of Keene's Cement Waterproof Plaster or approved equal, erected to a true plane, free of any surface projections or indentations. Inside corners shall be sharp and plumb. Exterior corners of entrance jambs shall be rounded, using a ¾″ radius metal corner. Soap receptacles, grab rails, etc., of the flush built-in type shall extend ⅛″ from the face of the cement finish.

APPLICATION OF MATERIALS: The wall linoleum contractor shall first prime the entire area of the Keene Cement with two coats of Nairn Wall Primer. The linoleum contractor shall then install Nairn Wall Linoleum strictly in accordance with the specifications for the application of this material over plaster walls and ceiling. Special precaution must be taken to secure a tight, firm bond at the junction with the base of the shower area, whether of metal, rubber, terrazzo or concrete.

NAIRN LINOLEUM — INSTALLATION SPECIFICATIONS

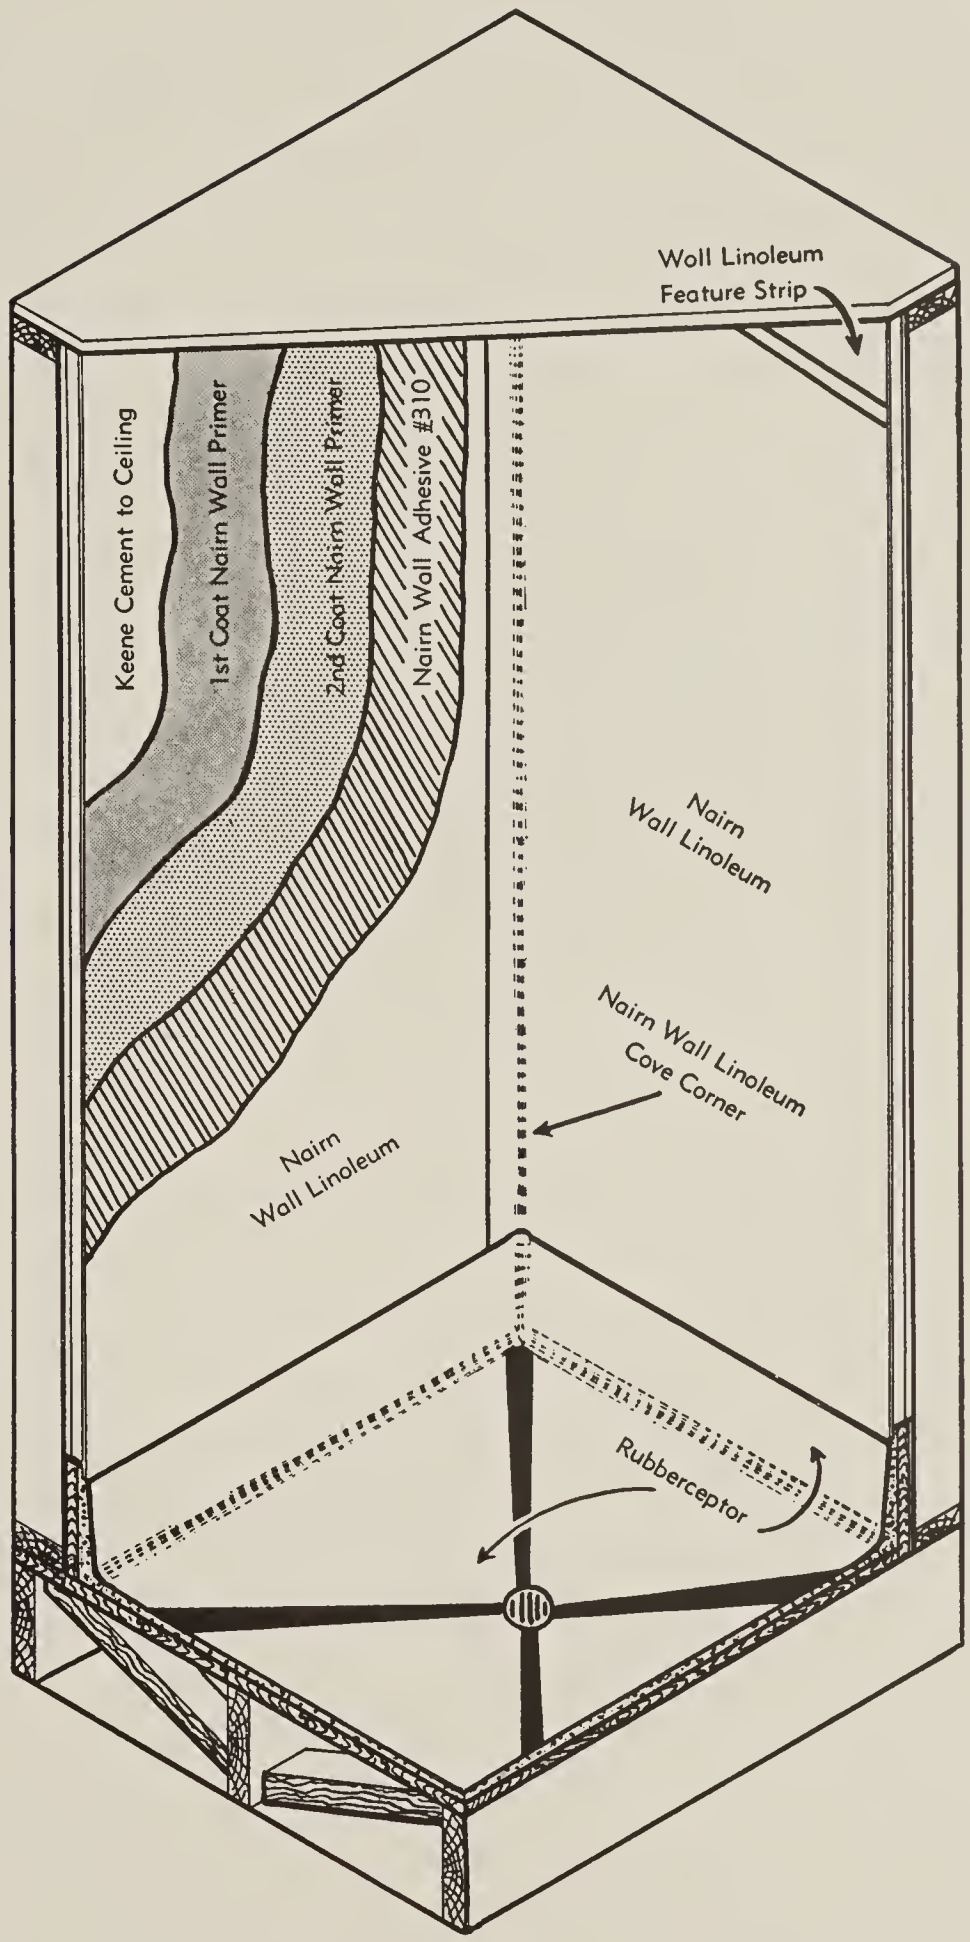

Specification for Installing:
Nairn Wall Linoleum in Standing Shower Stalls.

SINK TOP AND SPLASHBACK

The carpenter contractor shall furnish to the linoleum contractor proper backing and base true and plumb to receive the linoleum. The plumber shall furnish the sink which shall be secured to the under side of the sink area with proper supports and embedded in a water-proof compound.

APPLICATION OF MATERIALS: On the area thus prepared, the linoleum contractor shall install in one-piece construction Nairn Linoleum of gauge and pattern as specified. At all junctions between vertical and horizontal surfaces, Nairn cove strip shall be inserted to form a cove for backing of the linoleum. Nairn Lining Felt, Saturated, shall be embedded over the horizontal area in Nairn Damp-proof Cement spread liberally and in accordance with the manufacturer's specifications. This felt shall be thoroughly rolled into the adhesive. Over the felt and onto the backing and sides, the Nairn Linoleum shall be secured with Nairn Damp-Proof Cement spread liberally and in accordance with the manufacturer's specifications. The linoleum shall be rolled thoroughly on all areas to remove all air blisters and to secure proper adhesion. The edge of the linoleum at the sink opening shall be carefully scribed and care taken to see that the Damp-Proof Cement covers the edge of the metal both on horizontal and vertical surfaces so that a tight and water-proof joint is secured. If specified, the linoleum contractor shall supply a metal edging as called for at the upper edge of the linoleum on the vertical areas. Where abutting Nairn Wall Linoleum, the seams at the junction between the two vertical areas shall be carefully cut so that a tight and sightly seam will result. At the outside edge of the horizontal area, after the work is otherwise completed, a metal moulding shall be provided which shall cover completely the exposed edges of the supporting area and the linoleum and provide a metal lip to prevent water drippage.

ONE PIECE COVE BASE AND BORDER AT TOE RECESS

The wood underfloor shall be furnished to the linoleum contractor smooth and even. It shall be a double floor brought up to a surface.....inches before the finished floor level. This wood floor shall be in accordance with the specifications prepared by the manufacturer of the linoleum and called for under the specifications for installation of Nairn Linoleum over wood underfloor as given on page 178.

APPLICATION OF MATERIALS: The linoleum contractor shall install Nairn Linoleum in pattern and gauge as specified with one-piece cove base and border under and up the back of the toe recess. A feature strip shall be provided one inch wide in color and gauge as specified at the junction between the edge of the border and the edge of the field linoleum. Joints between the respective materials shall be sharp and clear and the upper edge of the base shall be carefully scribed to the under side of the toe recess.

NAIRN LINOLEUM — INSTALLATION SPECIFICATIONS

Note
One-Piece Construction of Counter Top and Back Splash

Nairn Wall Linoleum
Nairn Linoleum
Nairn Cove Strip
Plaster White Steel Troweled
Nairn Damp Proof Cement
Nairn Lining Felt
Nairn Damp Proof Cement
7/8 Plywood
Nairn Cove Strip
7/8 Plywood
Metal Strip Around Sink
Nairn Green Label Paste
Nairn Lining Felt
Nairn Green Label Paste
Wood Floor
One-Piece Cove Base & Border
Nairn Linoleum
1" Nairn Sealex Linoleum Feature Strip

Specification for Installing:

Nairn Linoleum on Sink Top and Splashback.

Nairn Linoleum over Wood Underfloor and One-piece Cove Base and Border at Toe Recess.

Nairn Sealex Insets, Feature Strips and Borders for "Personal-ized Floors" of Nairn Linoleum*

"Personal-ized Floors," Pioneered by Congoleum-Nairn, Become Decorating Sensation of the Day!

"Personal-ized Floors," developed and introduced by Congoleum-Nairn Inc., have proven to be the most successful new linoleum idea in years.

The opportunity to create their own original designs brings more and more appreciation from architects, decorators and home-owners. More and more, architects are discovering the real design possibilities through the use of Nairn Sealex Insets, Feature Strips and Borders for "Personal-ized Floors" of Nairn Linoleum.

You can design "Personal-ized Floors" for your clients with low-priced, prefabricated Nairn Sealex Insets without materially increasing the cost of the completed installation.

COLORFUL NAIRN SEALEX FEATURE STRIPS AND BORDERS permit the expression of still further individuality in the designing of "Personal-ized Floors." Nairn Sealex Feature Strips come in 1″ and 1½″ widths. Available in 23 beautiful colors.

In addition to Nairn Sealex Border Assemblies in 9″, 12″ and 15″ widths, there are Sealex Borders of plain black and black marble, the use of which results in unusually beautiful treatments complemented by Sealex Feature Strips in bright colors.

CORRECT COLOR-CORRELATION. Nairn Sealex Insets, Feature Strips and Borders have been correctly correlated with the colors of the patterns in the entire Nairn Linoleum line. This insures just the right color harmony or contrast for any room.

*Reg. U.S. Pat. Off.

How to Install Nairn Sealex Insets

1. Scribing

2. Cutting

1. SCRIBING. Place the Inset on the linoleum floor. Hold it firmly in place with one hand. Scribe around its entire edge, using a small brad-awl, ice pick or scribing tool. Be sure to hold the instrument in a firm and upright position.

2. CUTTING. After this "telltale" line has been made, cut along this mark to provide the perfect opening in which to place the Inset. Use a thin-bladed, hooked linoleum knife. Always hold the blade straight. Never cut a beveled edge.

3. REMOVING CUT-OUT PIECE. Remove cut-out piece and felt (if any) beneath it. Then smooth up the exposed underfloor as much as possible.

4. INSTALLING INSET. Spread paste on the back of the Inset with a large putty knife if the opening is too small for a regular paste spreader. If felt is to be placed underneath, follow the same procedure. After installation, the surface of the Inset should be cleaned immediately with a wet cloth and the edges pressed down smoothly with the flat side of a hammer or a small metal roller. Sand-bags or weights should be placed on top of the installed Insets until the paste has "set."

3. Removing cut-out piece

4. Installing Inset

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Neccssary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

First Class
Permit No. 107
Sec. 510 P. L. & R.
KEARNY, N. J.

BUSINESS REPLY CARD

No Postage Necessary if Mailed in U. S.

2c POSTAGE WILL BE PAID BY---

CONGOLEUM-NAIRN INC.

Kearny, New Jersey

Contract Linoleum Division

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

CONGOLEUM-NAIRN INC.
Kearny, N. J.

☐ Please send me samples No.....

☐ Please have Nairn Linoleum representative call

Remarks.....

.....

Name.....

Address.....

.....

AVERY LIBRARY
COLUMBIA UNIVERSITY